

Horsley Witten Group

Sustainable Environmental Solutions

90 Route 6A • Sandwich, MA • 02563
Phone - 508-833-6600 • Fax - 508-833-3150 • www.horsleywitten.com



Hashamomuck Pond Watershed Management Plan

July, 2006



Prepared for:

The Peconic Estuary Program

HASHAMOMUCK POND WATERSHED MANAGEMENT PLAN

July 2006

Prepared by:
Horsley Witten Group, Inc.
Sandwich, Massachusetts

Prepared for:
Peconic Estuary Program
Suffolk County Department of Public Health Services
Office of Ecology
Riverhead, New York

This report was prepared for the Peconic Estuary program with funding provided by the U.S. Environmental protection Agency under assistance agreement No. CE982137-01-2 to the Peconic Estuary Program through the Suffolk County Department of Health Services. The mention of trade names or commercial products does not in any way constitute an endorsement or recommendation for use.



ACKNOWLEDGEMENTS

Horsley Witten Group, Inc. would like to thank the Peconic Estuary Program for guidance, information collection, and useful comments during the preparation of this document. We thank the Suffolk County Soil and Water Conservation District and the USDA, Natural Resources Conservation Service for their invaluable assistance in this project. In addition, we thank the Peconic Estuary Bay Keeper for assistance in collecting field data that was integral to the accuracy of this report. We would also like to thank the US EPA and New York State Department of Environmental Conservation for comments on the final draft of this document.

TABLE OF CONTENTS

	<u>Page</u>
i EXECUTIVE SUMMARY	1
1.0 INTRODUCTION	4
1.1 The Peconic Estuary	4
1.2 Project Background	6
1.3 Organization of the Plan	8
2.0 WATERSHED CHARACTERISTICS	9
2.1 Land Use Watershed Characterization	9
2.2 Pollutant Loading Assessment	12
2.3 Existing Land Development Review Process	16
2.4 Existing Stormwater Infrastructure and Maintenance	17
2.5 Future Buildout Pollutant Loading Assessment	18
3.0 STORMWATER MANAGEMENT PROGRAMMATIC ASSESSMENT	23
3.1 Recommendations for Modifications to Land Development Review Process	23
3.2 Recommendations for Maintenance of Stormwater Infrastructure	24
3.3 Public Education and Outreach – Recommended Focus Areas	25
3.3.1 Waterfowl Management	26
3.3.2 Lawn Management	27
3.3.3 Pet Waste Management	28
3.3.4 Stormwater Management	28
3.3.5 Septic System Maintenance	29
3.4 Public Education and Outreach – Recommended Programs	30
3.4.1 Watershed Awareness Day	30
3.4.2 Media Campaigns	30
3.4.3 Institution of an “Adopt-a-Watershed” Organization	31
3.4.4 Demonstration Projects	31
3.4.5 Watershed Clean-up Days	31
3.4.6 School Watershed Science Programs	32
3.5 Summary of Programmatic Recommendations	32

TABLE OF CONTENTS (Cont.)

4.0	STORMWATER MANAGEMENT ASSESSMENT	33
4.1	Assessment Methodology	33
4.2	Storm Drainage Assessment and Mapping	35
4.3	Potential Sites and Best Management Practices Selection	35
4.4	Description of Proposed Best Management Practices	38
4.5	Retrofit Ranking System	38
4.6	Investigated Sites and Selected BMP Descriptions	40
4.6.1	Site H-5- End of Laurel Avenue	42
4.6.2	Site H-7- Long Creek Drive	42
4.6.3	Site H-9- Bayview Avenue	43
4.6.4	Site H-14- Dons Way	43
4.6.5	Site H-18- Intersection of Colony Road & Bayview Avenue	44
4.6.6	Site H-22A- Intersection of Grove Road & Mill Creek Drive	44
4.6.7	Site H-22B- Grove Road	44
4.7	Unified Subwatershed and Site Reconnaissance	45
4.7.1	Neighborhood Source Assessment (NSA)	46
4.7.2	Hotspot Site Investigation (HIS)	47
4.7.3	Pervious Area Assessment (PAA)	48
4.7.4	Streets and Storm Drains (SSD)	48
5.0	HABITAT PROTECTION ASSESSMENT	50
6.0	REFERENCES	55

FIGURES

Figure 1-1	Vicinity Map	5
Figure 2-1	Aerial Photograph	10
Figure 2-2	Land Use	11
Figure 2-3	Soils	13
Figure 2-4	Hashamomuck Pond Watershed – Highest Priority Subwatersheds for fecal coliform loading under existing and future conditions.	21
Figure 2-5	Hashamomuck Pond Watershed – Highest Priority subwatersheds for nitrogen loading under existing and future conditions.	21
Figure 4-1	Drainage Area and Subwatershed Map	34
Figure 4-2	Field Inventory Locations	36
Figure 5-1	Habitat Assessment	51
Figure C-1	Schematic of a Bioretention System	C-1
Figure C-2	Schematic of a Micro-Bio Inlet	C-4

TABLE OF CONTENTS (Cont.)

Figure C-3	Schematic of a Shallow Marsh/Pocket Wetland	C-5
Figure C-4	Schematic of a Dry Swale	C-7
Figure C-5	Schematic of a Grassed Channel	C-10
Figure C-6	Schematic of an Oil/Grit Separator	C-11
Figure D-1	Best Management Practices (BMP) Sites – H-5	D-4
Figure D-2	Best Management Practices (BMP) Sites – H-7	D-9
Figure D-3	Best Management Practices (BMP) Sites – H-9	D-12
Figure D-4	Best Management Practices (BMP) Sites – H-14	D-17
Figure D-5	Best Management Practices (BMP) Sites – H-18	D-20
Figure D-6	Best Management Practices (BMP) Sites – H-22A	D-24
Figure D-7	Best Management Practices (BMP) Sites – H-22B	D-28

TABLES

Table 2-1	Hashamomuck Pond Watershed Existing Land Use Summary	9
Table 2-2	Summary of GIS-Based Bacteria and Nitrogen Loading Model for Hashamomuck Pond	15
Table 2-3	Comparison of Average Embayment Concentrations Predicted by the Model with Measured Concentrations in Hashamomuck Pond	16
Table 2-4	Future Change in Land Use- Hashamomuck Pond Watershed	19
Table 2-5	Summary of GIS-Based Future Bacteria and Nitrogen Loading Model for Hashamomuck Pond	19
Table 4-1	Summary of Proposed BMP	37
Table 4-2	Retrofit Ranking Summary	41
Table 5-1	Parcel Summary Table	52
Table C-1	Design Guidance for a Bioretention System	C-2
Table C-2	Constructed Wetland Design Criteria	C-6
Table C-3	Design Criteria for Dry Swales	C-8
Table C-4	Design Criteria for Grass Channels	C-9

APPENDICES

Appendix A:	Catch Basin Insert – Performance Data
Appendix B:	Watershed Assessment Guide
Appendix C:	Description of Proposed Best Management Practices
Appendix D:	Selected BMP Sites
	D-1: Subwatershed H-5
	D-2: Subwatershed H-7
	D-3: Subwatershed H-9
	D-4: Subwatershed H-14
	D-5: Subwatershed H-18
	D-6: Subwatershed H-22A
	D-7: Subwatershed H-22B
Appendix E:	Unified Subwatershed and Site Reconnaissance

i EXECUTIVE SUMMARY

In 2001, the Peconic Estuary Program (PEP) adopted a final Comprehensive Conservation and Management Plan (CCMP) for the Peconic Estuary and its watersheds. The plan identifies four priority management areas: control of pathogens, nitrogen, toxins, and enhancement of habitat and living resources. In 2003, Horsley Witten Group (HW) completed a regional stormwater assessment and management project for the Peconic Estuary Program that focused on developing a regional, storm-event-based, pollutant loading model to help prioritize management efforts for four pilot watersheds within the greater Peconic Estuary system based on the contributions of pathogens and nitrogen from each watershed. The Hashamomuck Pond watershed in the Town of Southold was one of the watersheds studied, and general recommendations were made to establish remediation and preventive measures for managing stormwater.

The development of this Watershed Management Plan for the Hashamomuck Pond watershed is the next phase of that initial project. This plan focuses on improved management of stormwater pollutants, including the primary stressors (nitrogen, phosphorous, suspended solids, and bacteria) and secondary stressors (metals and hydrocarbons) that are negatively impacting Hashamomuck Pond. In addition, this plan identifies important remaining wildlife habitat areas within the Hashamomuck Pond watershed and provides guidance on which parcels are most valuable for protection of critical habitats. The planning process included a rapid field assessment for stormwater management and habitat value throughout the watershed. The stormwater assessment was used to identify likely stormwater pollutant sources as well as areas where best management practices (BMPs) could be installed to improve the management and treatment of stormwater in the watershed. Successful implementation of this plan is expected to help reduce stormwater runoff pollution; maintain or improve overall water quality conditions, shellfish harvesting capacity, eelgrass habitat, and degraded marsh areas; and protect critical open space habitat areas.

This Watershed Management Plan was developed as a pilot plan, along with three other pilot plans (West Neck Bay in the Town of Shelter Island, Reeves Bay in the Town of Southampton, and Meetinghouse Creek in the Town of Riverhead) to serve as a model for other areas of the Peconic Estuary system. The goal is to eventually develop targeted management plans by towns and interested groups for small embayments and watersheds throughout the larger Peconic Estuary system.

The Plan is broken down into five sections and a set of appendices covering the following major topics: an introduction and review of management objectives; a characterization of the watershed; a pollutant loading estimate under build-out conditions in the watershed; recommendations for improved programmatic stormwater management throughout the watershed; a detailed stormwater management assessment in which potential sites and BMPs are identified and conceptual designs are presented for each recommended site; and a habitat protection assessment.

Stormwater Programmatic Assessment and Recommendations

An assessment of various stormwater management programmatic opportunities in the Hashamomuck Pond watershed was performed. Regular inspections and maintenance are a top priority to ensure long-term function of the stormwater infrastructure. The review process for new and redevelopment projects could be improved by adopting a pre-approved list of effective BMPs and requiring certain site design techniques to reduce pollutant loading. In addition, several public education focus areas and programs can help improve the health of the watershed - outreach campaigns should be tailored to target the specific issues in various neighborhoods throughout the watershed including pet and waterfowl waste, as well as lawn management. Inter-municipal and agency coordination on these program recommendations can reduce costs and improve effectiveness. These programs and recommendations are discussed in more detail in Section 3.

Stormwater Assessment and Recommendations

An assessment of stormwater management and treatment in the Hashamomuck Pond watershed was performed in order to identify problem areas and potential sites for the installation of stormwater BMPs. The goal of these BMPs is to improve the removal of pollutants before the stormwater runoff reaches Hashamomuck Pond. Based on a prioritization process, seven locations were selected for BMP implementation. Stormwater BMPs proposed for these sites include grass channels, bioretention systems, dry swales, oil/grit separators, micro-bioretention inlets, constructed wetlands and sediment forebays. Estimated costs for these BMPs range from \$49,000 to \$133,000 for design, permitting, and construction. If all seven proposed BMP retrofits were implemented, the total cost is estimated at \$673,000. The proposed BMPs and the methodology used to select locations and practices are described in detail in Section 4. In addition, assessments are provided that investigate nonpoint pollution sources in the upland area and recommended actions to improve watershed conditions. These are known as "Neighborhood Source Assessments," "Hotspot Site Investigations," "Pervious Area Assessments," and "Streets and Storm Drains Assessments" and are also discussed in Section 4.

Habitat Assessment and Recommendations

The goal of the habitat assessments was to identify parcels of land, or portions of those parcels, that exhibited a higher relative ecological value than others. This value is based upon readily observable site attributes pertaining to wildlife habitat that could be observed during a single site visit. Parcels with high ecological value are recommended for long-term protection through conservation measures or acquisition by the town, a land trust, or another similar conservation organization.

Field assessment locations were identified based on data from aerial photographs of the watershed and geographic information system (GIS) data layers (e.g. GIS-identified

wetland parcels and undeveloped parcels). Sites were selected for on-site review if they were undeveloped, primarily forested, contained upland areas with residential development potential, and were not mapped as “Protected Land” according to information provided by The Nature Conservancy (TNC) and/or Suffolk County. Once the rapid field habitat assessment was performed, the areas were prioritized based on habitat complexity criteria, level of habitat disturbance, proximity to existing development and protected area, evidence of ongoing land management activities, and observable evidence of wildlife.

Three groups of parcels in the Hashamomuck Pond watershed were identified to be the subject of a field habitat assessment. These included, in order of priority, two contiguous parcels of undeveloped coastal land at the end of Long Creek Drive, three adjoining parcels of land that abut the eastern extent of Hashamomuck Pond, and two large inland properties between Laurel Avenue and Vennecott Drive. The parcels recommended for habitat protection are discussed further in Section 5.

1.0 INTRODUCTION


1.1 The Peconic Estuary

The Peconic Estuary is located on the eastern end of Long Island, New York between the North and South Forks. Its waters cover approximately 158,000 acres with 450 miles of shoreline and support a wide array of wildlife. There are several smaller bays recognized throughout the greater Peconic Estuary including Flanders Bay, Great Peconic Bay, Shelter Island Sound, Gardiners Bay, and Little Peconic Bay. Bordering this estuary are the towns of East Hampton, Southampton, Brookhaven, Riverhead, Southold, and Shelter Island (Figure 1-1). The region is popular for vacationing and supports a wide variety of both recreational and natural resources. Boating, swimming and sunbathing are a few of the many recreational activities that draw thousands of people to this region. Fishing and shellfishing are two of the predominant local industries that are directly dependent upon the water quality of the estuary. Economic studies of the overall Peconic Estuary region have estimated that those businesses and industries directly tied to the estuary produce upwards of \$450 million of annual income within the region (PEP CCMP, 2001).

The shellfishing industry in the Peconic region has relied on abundant fisheries resources to continuously harvest several mollusk species including hard clams (littlenecks, cherrystones, and chowders), oysters and scallops. Although all of the 158,000 acres of bay floor are recognized by state agencies as shellfishing areas, the majority of yield comes from the shallower rivers and embayments that line the estuary. Estimates have varied as to how much of the bay is highly productive with figures ranging from 8,000 acres (Lewis et al., 1997) to 20,880 (PEP CCMP, 2001). The harvesting in these areas is highly concentrated due to the fact that these beds comprise only six to eighteen percent of the entire shellfishing area (Lewis et al., 1997). The clustering of these shellfish in the smaller embayments demonstrates that estuarine environments with secluded shallower areas are highly productive.

The shellfishing beds in the Peconic Estuary have been monitored for several decades by the New York State Department of Environmental Conservation (NYSDEC) in order to assess the safety of these shellfish for consumption. High levels of coliform bacteria have resulted in the closure, either periodic or year-round, of much of the more productive beds in the estuary. Coliform bacteria, specifically fecal coliform (FC), are produced in the intestinal tracts of warm-blooded animals and are present in high concentrations in their fecal matter. FC bacteria are used as an indicator for the presence of other, potentially harmful pathogens.


Efforts to lower bacterial loading to the Peconics have been ongoing for many years and have developed concurrently with federal legislation such as the Clean Water Act (CWA). In 1987, the CWA was amended to include the National Estuary Program. Under Section 320, the CWA allows individual States to nominate estuaries for funding

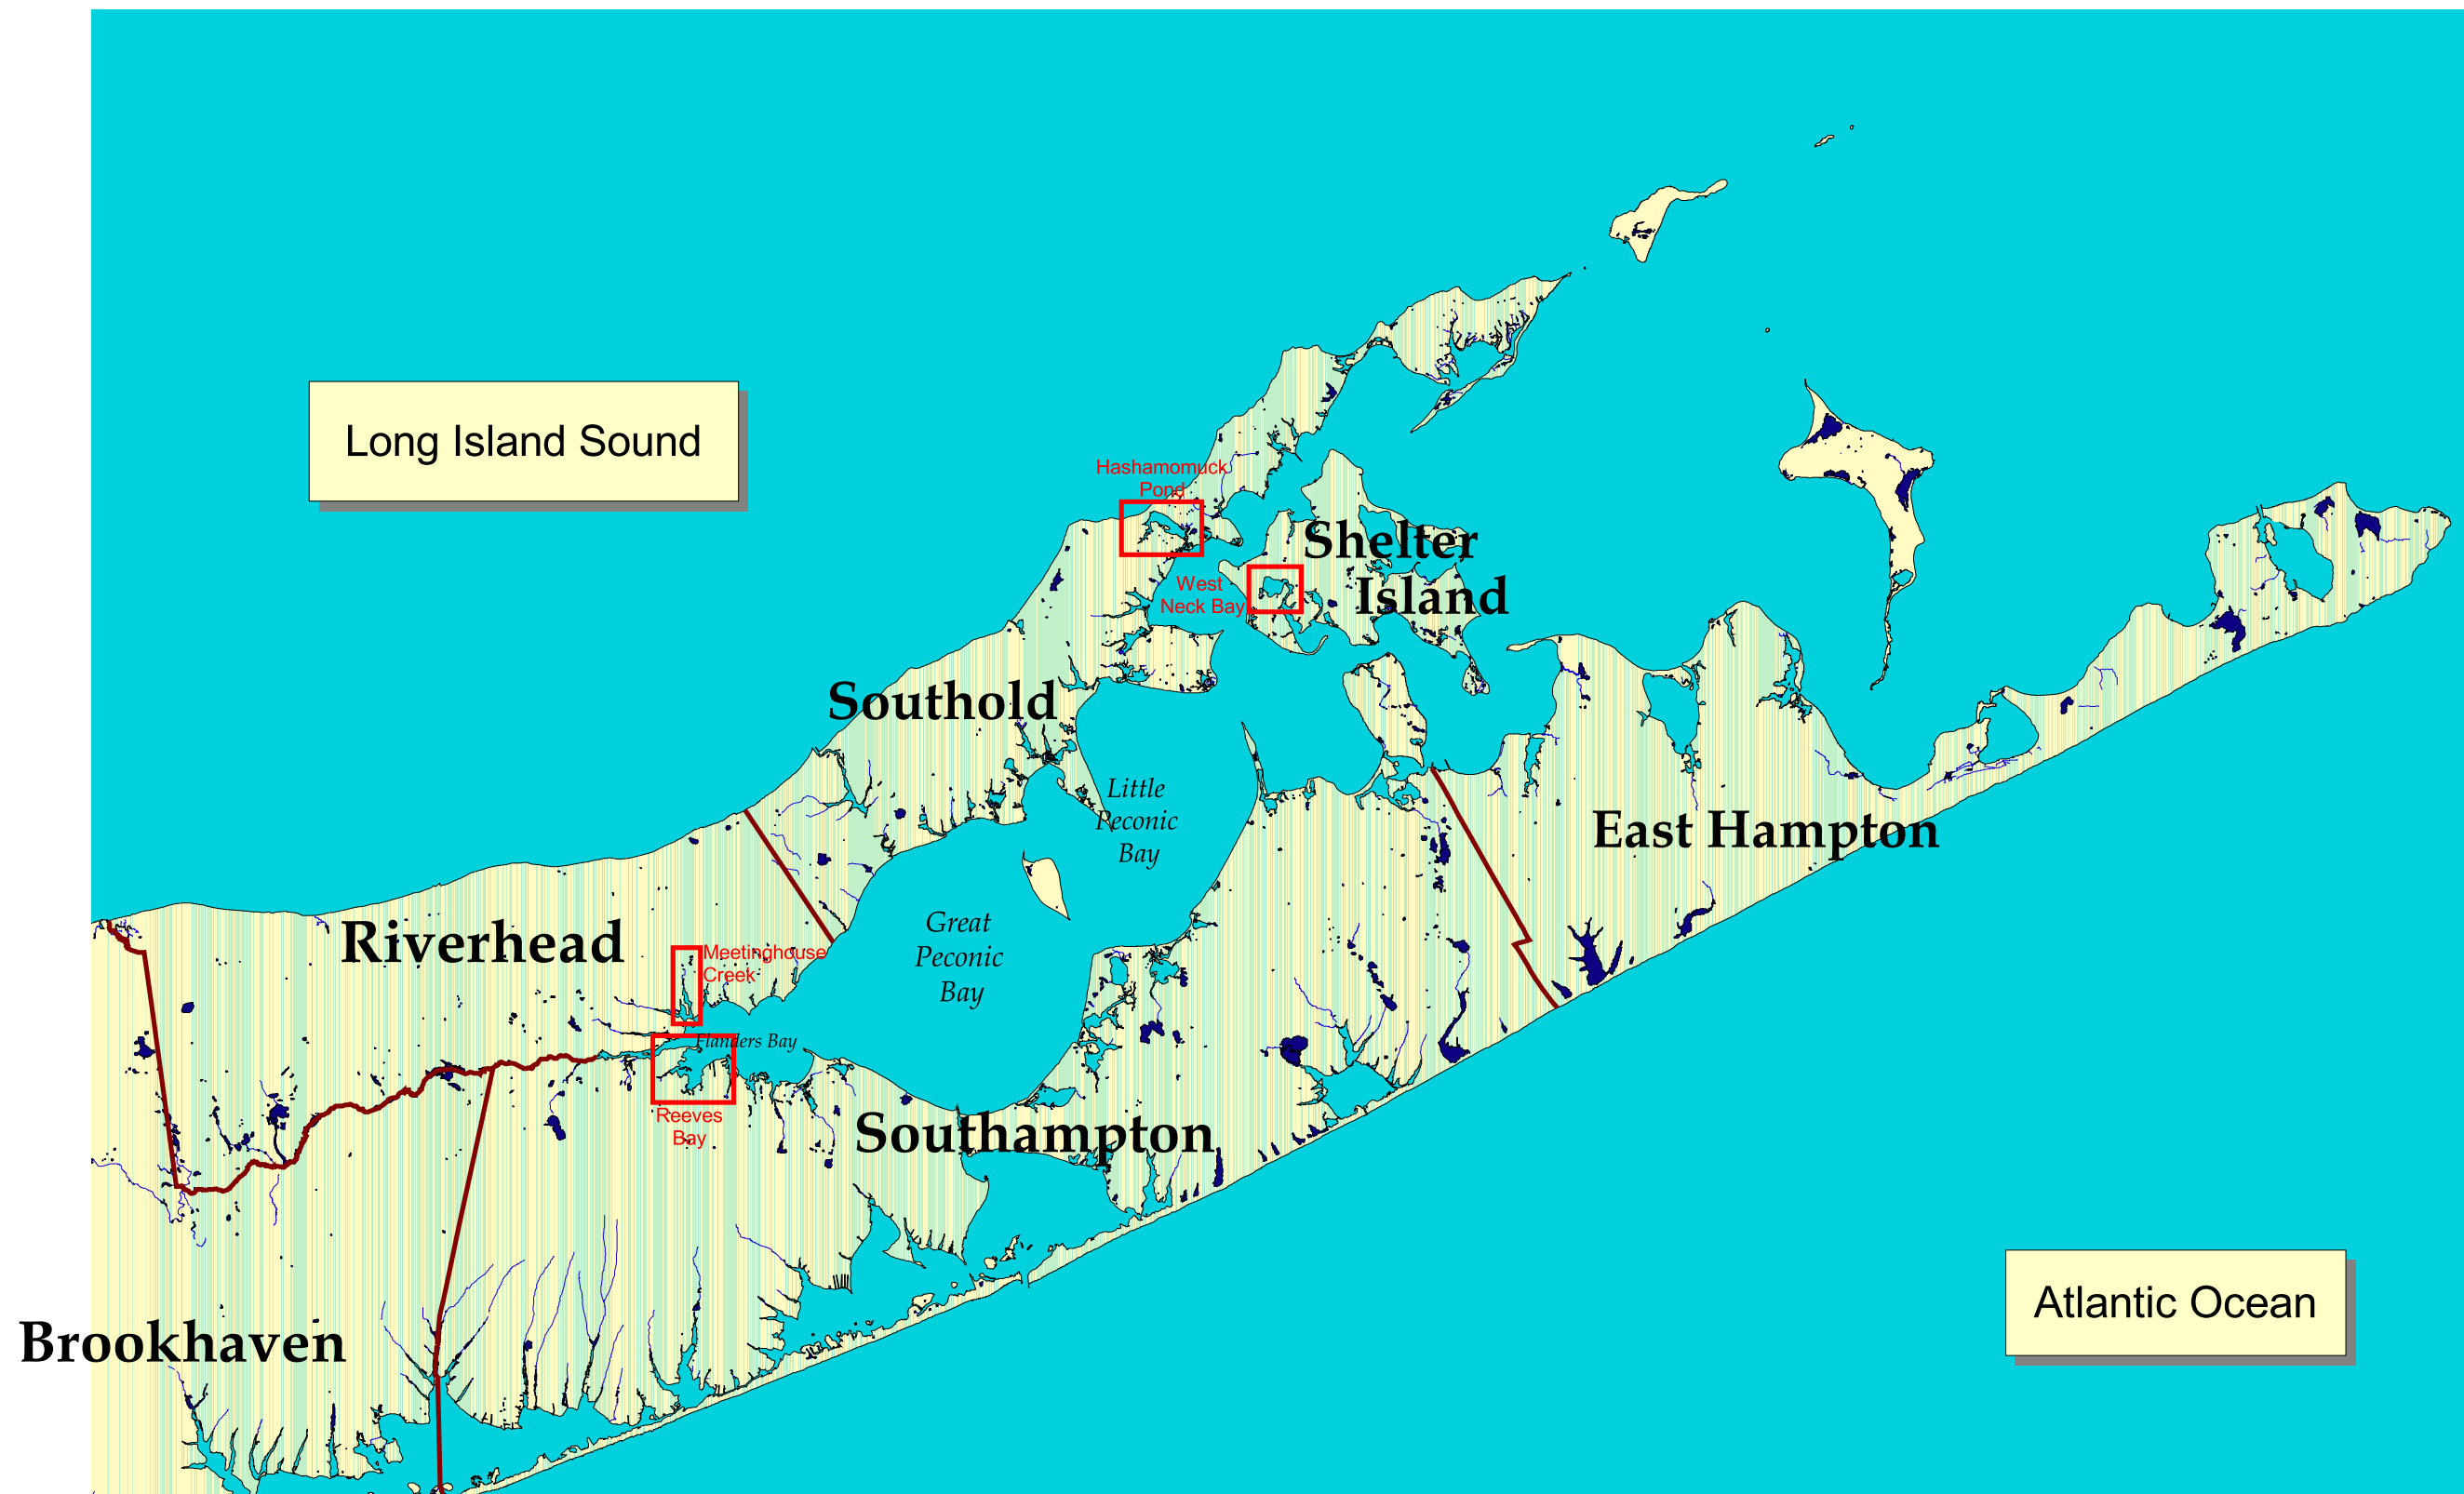

Legend



Watersheds Chosen
for Assessment



Horsley & Witten, Inc.
phone: 508.833.6600
www.horsleywitten.com

The Peconic Estuary Region Vicinity Map

k:\775\gis\projects\final_1thru5.apr

Figure 1-1

toward the development of a CCMP. Once an estuary receives funding from the National Estuary Program, the CCMP is developed to address the unique environmental needs of that specific region. Under the CCMP of the Peconic Estuary Program, activities related to shellfishing are a primary focus of ongoing research.

To date, those studies that have investigated the incidence of coliform bacteria in the Long Island region have concluded that the predominant source of this pollutant is stormwater runoff (NURP 1983). For this reason, the CCMP prepared by the Peconic Estuary Program focuses heavily upon assessing and ultimately eliminating pollutant loads that result from runoff. One section of the CCMP, the “Pathogens Management Plan,” states that a primary objective is to “maintain the current status of certified (seasonally and year-round) shellfish beds and re-open uncertified beds as long as these do not conflict with the need to protect human health nor with the need to protect and enhance natural resources” (PEP 2001).

Within the CCMP, non-point source pollution, including stormwater runoff, is given the highest priority for remedial efforts. Stormwater runoff not only transports potentially high levels of bacteria to the bay, but also other pollutants that can be significant stressors, such as sediments, nutrients, hydrocarbons, and metals. Another specific priority within the CCMP is limiting nitrogen loading as excessive nitrogen loading can damage estuarine ecosystems and cause potentially harmful algal blooms. In areas where lawns and agricultural areas are regularly fertilized, stormwater runoff can deliver significant amounts of nitrogen to a receiving embayment. A well-designed stormwater management plan could therefore reduce several pollutants that potentially contribute to water quality problems simultaneously. Carefully planned and implemented strategies can successfully limit loadings of both FC bacteria and nitrogen. These strategies would therefore work to help accomplish several of the goals outlined within the Peconic CCMP including reopening shellfishing areas, reducing overall nitrogen loading, and decreasing the occurrence of brown tide.

1.2 Project Background

Horsley Witten Group (HW) completed a regional stormwater assessment and management project for the PEP in 2003 (Peconic Estuary Stormwater Assessment and Planning Tool; hereon referenced as HW, 2003). The goal of the assessment was to prioritize management efforts for four pilot watersheds within the greater Peconic Estuary system based on the contributions of pathogens and nitrogen from each subwatershed within each pilot watershed, using results from a regional, storm-event-based, pollutant loading model. The body of information previously compiled for these four watersheds was used as the starting point and baseline of information for the four pilot management plans completed as part of this project. The four pilot watersheds for which a management plan has been developed are the following:

- Hashamomuck Pond (Southold),
- West Neck Bay (Shelter Island),
- Reeves Bay (Southampton), and
- Meetinghouse Creek (Riverhead).

This Hashamomuck Pond Watershed Management Plan was developed using a rapid watershed planning approach, consisting of following three major phases:

- 1) A watershed assessment stage;
- 2) An evaluation of management strategies, including a planning level analysis of their costs and benefits; and
- 3) Recommendations for implementation of management actions.

This plan was developed using previous studies together with aerial photography and a geographic information system (GIS), as well as significant field reconnaissance to ground truth land use and drainage information, evaluate habitat, identify potential stormwater pollutant sources, and provide specific management recommendations. A significant effort was focused on evaluating management alternatives including structural best management practices, regulatory and land use changes, and public education. Two meetings with local watershed stakeholders and information provided by local municipalities were integral to the execution of this project.

The main focus of this plan is to improve management of stormwater-derived pollutants that are negatively impacting Hashamomuck Pond by both effectively addressing pollution prevention and implementing a variety of appropriate stormwater best management practices (BMPs) in key areas. In addition, this plan identifies important remaining wildlife habitat areas within the Hashamomuck Pond watershed and provides guidance on which parcels are most valuable for protection of critical habitats. The planning process included a rapid field assessment for stormwater management and habitat value throughout the watershed. The following goals of the Peconic Estuary CCMP will be at least partially achieved through the successful implementation of this watershed management plan.

For Pathogens:

- Maintain current level of lands available to shellfish harvesting and re-open closed shellfish beds;
- Reduce overall stormwater runoff pollution; and
- Attain a zero discharge of untreated stormwater runoff from new development.

For Nitrogen:

- Decrease total nitrogen concentration in the western estuary to 0.45 mg/L;
- Ensure that total nitrogen levels in shallow waters remain at or below 0.4 mg/L in order to maintain and improve eelgrass habitat;
- Improve or maintain existing total nitrogen levels in Flanders Bay;
- Develop a nitrogen allocation strategy for the entire estuary, with an initial goal to reduce fertilizer nitrogen loading by 10-25%;
- Ensure that there is no substantial net increase in nitrogen loading to areas east of Flanders Bay; and
- Continue to acquire open space.

For Habitat and Living Resources:

- Protect the high quality habitats in Critical Natural Resource Areas;
- Maintain current eelgrass acreage and increase acreage by 10% over 10 years;
- Maintain and increase tidal and freshwater marsh acreage, restore degraded areas; and
- Enhance shellfish resources.

For Toxins:

- Improve the quality of the ambient environment where there is evidence that human inputs of toxins impair or threaten these resources;
- Comply with hazardous waste disposal and remediation regulations;
- Decrease overall emission of toxins;
- Eliminate holdings of banned pesticides and hazardous substances;
- Decrease overall pesticide applications in the five east end towns; and
- Eliminate, to the maximum extent possible, pesticide applications on turf grass on all publicly held land.

1.3 Organization of the Plan

This Watershed Management Plan is broken down into five sections and a set of appendices. Section 2 depicts a characterization of the watershed including a land use assessment, a pollutant loading assessment, a discussion of the existing local review process for land development in the watershed, a discussion of the existing stormwater infrastructure, and a pollutant loading estimate under build-out conditions in the watershed. Section 3 presents recommendations for improved programmatic stormwater management throughout the watershed. These recommendations cover suggested modifications to the existing land development review process, possible improvements for maintenance of stormwater infrastructure, and improved stormwater management public education. This is followed in Section 4 by a subwatershed-specific stormwater management assessment in which potential sites and best management practices are identified, and conceptual designs are presented for each recommended site. Section 4 also includes assessments provided to quantify impacts from land uses with high pollutant loading potential (known as “hotspots”) and the drainage systems themselves. These are known as “Neighborhood Source Assessments,” “Hotspot Site Investigations,” “Pervious Area Assessments,” and “Streets and Storm Drains Assessments.” These assessments were all performed in the field to identify other opportunities to improve watershed conditions, target outreach efforts, and reduce pollutant loads. In addition, a stormwater management site ranking system is presented, and the field reconnaissance methods are described. Section 5 presents habitat protection sites and methods used to identify and rank them. The appendices include the methodologies, the stormwater retrofit conceptual plans, the stormwater field data sheets, and the habitat field data sheets.

2.0 WATERSHED CHARACTERISTICS


2.1 Land Use Watershed Characterization

Hashamomuck Pond is a secluded embayment located in Southold along the North Fork of Eastern Long Island (Figure 2-1). The embayment is approximately one mile long and one-quarter mile across at its widest point. At the northwestern end of the embayment, a slender extension called Long Creek tapers off the main body of the embayment. The embayment narrows and connects with Peconic Bay at its southern most point through Mill Creek. The tidal range within Hashamomuck Pond is approximately three feet with the surface water covering approximately 170 acres. The watershed contributing to Hashamomuck Pond is mostly residential with a large area of open field under succession and vegetable cropland in the northwest quadrant of the watershed (Table 2-1 and Figure 2-2). The southern shore of the pond near the outlet to Shelter Island Sound is primarily vacant scrubland and the northern shore near the outlet is agricultural land. The shoreline of Hashamomuck Pond is bordered mostly by low and medium density residential housing. Most houses within the watershed around Hashamomuck Pond have on-site septic systems and there are no sewage treatment systems discharging directly into the Pond.


Table 2-1. Hashamomuck Pond Watershed Existing Land Use Summary


Land Use Category	West Neck Area (Ac)	West Neck Area % of Total
Low Density Residential	33.7	8%
Medium Density Residential	77.4	18%
High Density Residential	4.3	1%
Commercial	5.1	1%
Industrial	0.0	0%
Institutional	0.8	0%
Open Space	192.4	44%
Agriculture	93.1	22%
Vacant	0.0	0%
Transportation	25.6	6%

The New York State Department of Environmental Conservation (NYSDEC) has designated this embayment as “growing area 23” and has monitored its water quality with varying frequency for several decades. All of the waters within Hashamomuck Pond experience some level of closure due to unacceptable levels of bacteria. The most secluded areas in the northeastern corner, including almost all of Long Creek, are closed year-round. Adjacent to these areas is a section of the embayment that is under a conditional program where certification is dependent upon the results of more rigorous

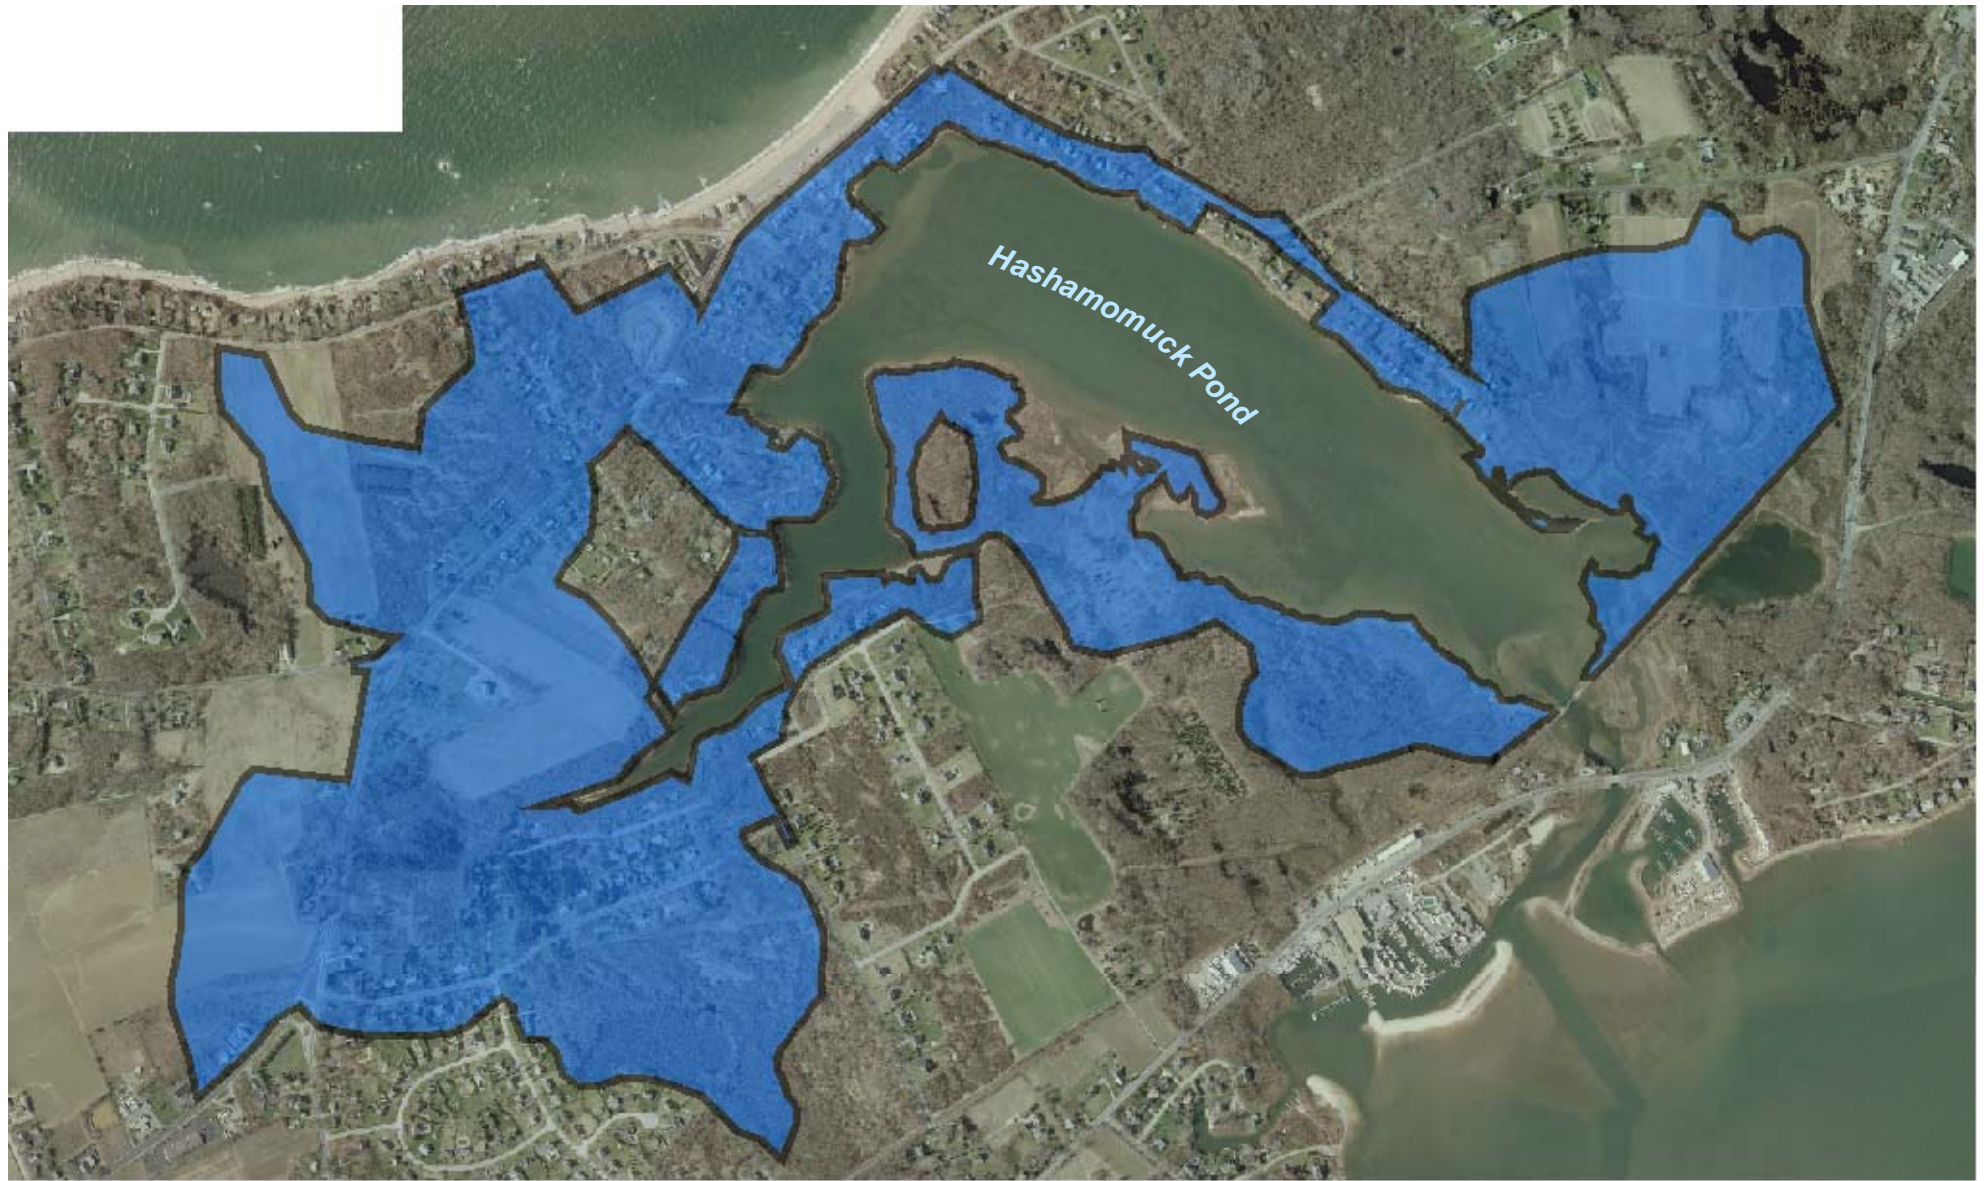

Legend

 Hashamomuck Pond Watershed




Horsley Witten Group
phone: 508-833-6600
www.horsleywitten.com 

Aerial Photograph of
Hashamomuck Pond

7/11/06 EC
J:\4094 Peconic Bay Estuary\GIS\
watershed_hash.mxd

Figure 2-1

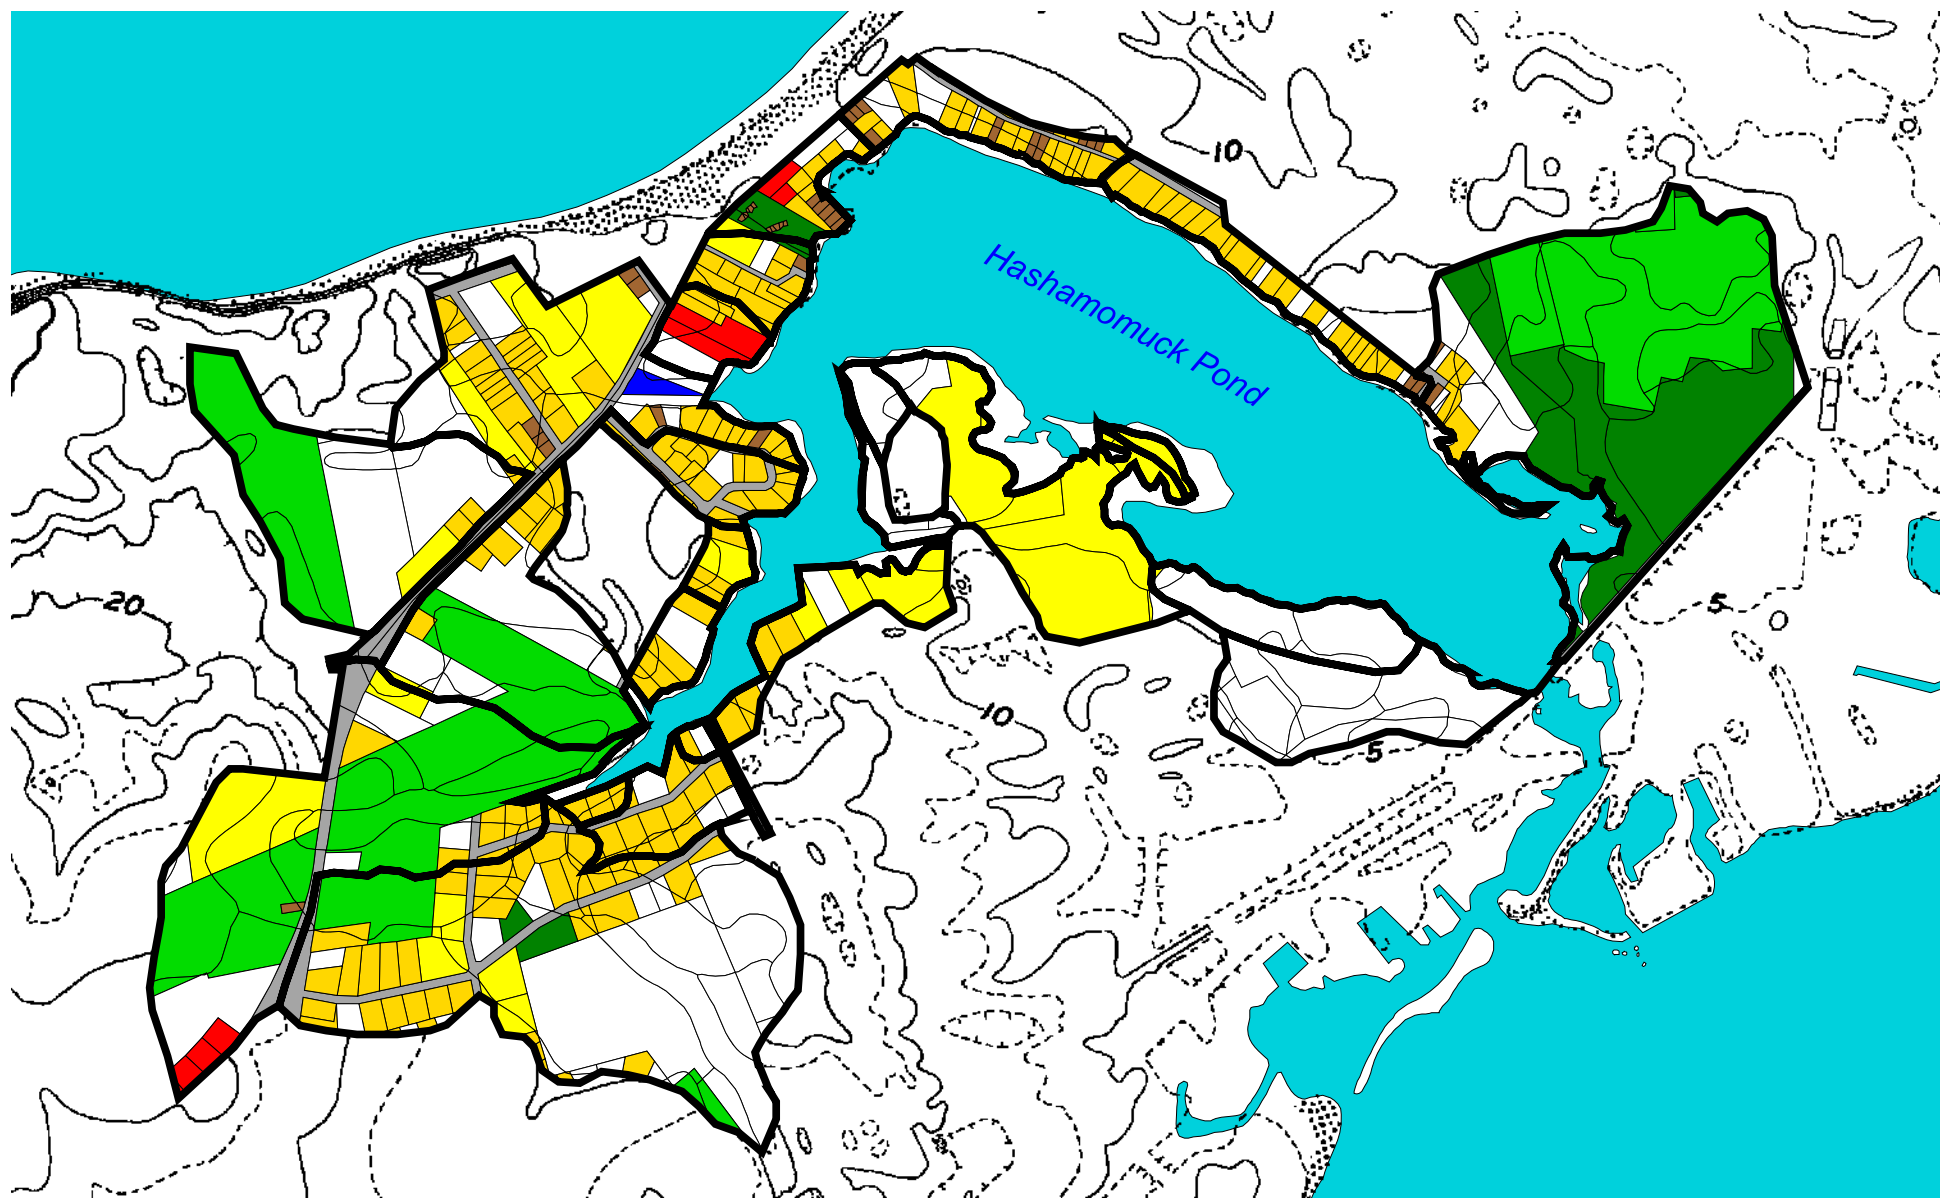


Legend

 Subwatershed Boundaries

Land Use Categories

 Low Density Res	 Open Space
 Med Density Res	 Agriculture
 High Density Res	 Vacant
 Commercial	 Transportation
 Institutional	



Horsley Witten Group
phone: 508-833-6500
www.horsleywitten.com 

Land Use within Hashamomuck Pond Watershed

J:\4094 Peconic Bay Estuary\reports\
Hashamomuck Pond

Figure 2-2


sampling. The main body of Hashamomuck Pond can be seasonally certified for shellfishing between December 1 and April 30. From December 21, 2005 through April 30, 2006, the waters of Hashamomuck Pond normally designated as closed were classified as conditionally certified, with the exception of the Clay Pit (the enclosed pond). This conditional designation is not automatic and is established on an annual basis. Conditional areas remain open to shellfishing provided that not more than 0.35 inches of rainfall is recorded in a 24-hour period. Pursuant to federal and state regulations, bacteriological sampling and pollutant source surveys are performed annually for those areas that are seasonally and conditionally closed.

Hashamomuck Pond (Priority Waterbodies List #1701-0162) is one of twenty waterbodies within the Peconic Estuary for which a Pathogen Total Maximum Daily Load (TMDL) is being developed by the USEPA and NYSDEC. A TMDL is a regulatory apportionment of loading that frequently requires a reduction goal for each pathogen point and nonpoint source entering the Peconics. Nonpoint sources, particularly stormwater runoff containing waterfowl, wildlife, domestic pet, and livestock waste, as well as direct deposition of waterfowl waste, are the most significant contributors of pathogens to the Peconics. The basis for the TMDL analysis lies within New York's 303(d) list of water segments that exhibit impaired conditions.


The majority of soils surrounding the pond are highly permeable type "A" and type "B" soils (Figure 2-3). Hydrologic soil groups are used to generally group different soil types based upon their relative ability to infiltrate versus runoff water. "A" soils are the most permeable and generate the least amount of stormwater runoff while "D" soils are the least permeable and generate the most runoff. Type "C" soils occur in the Hashamomuck Pond watershed mostly in areas where road construction has used artificial fill. Type "D" soils are found in isolated areas that are predominately muck and tidal marsh. These small areas will provide significantly higher levels of runoff per unit of area than the wider coverages of type "A" and type "B" soils.

2.2 Pollutant Loading Assessment



In our initial study (HW, 2003), pollutant loading potential was evaluated under existing conditions in order to help prioritize areas generating higher pollutant loads and to target future management recommendations. That evaluation was conducted using an interactive model to perform two fundamental calculations: runoff volume and total pollutant load by watershed (HW, 2003). The overall watershed to the embayment was divided into even smaller subwatershed areas for assessment based on a field survey performed by the Peconic Baykeeper. The volume of runoff is calculated in the model using the U.S. Department of Agriculture - Natural Resource Conservation Service (USDA-NRCS) TR-55 method. To determine the total pollutant load, this volume is then multiplied by a series of FC bacteria and nitrogen loading coefficients. Each coefficient is expressed as a concentration of the specified pollutant within a fixed amount of runoff that is specific to the land use categories listed in Table 2-1.

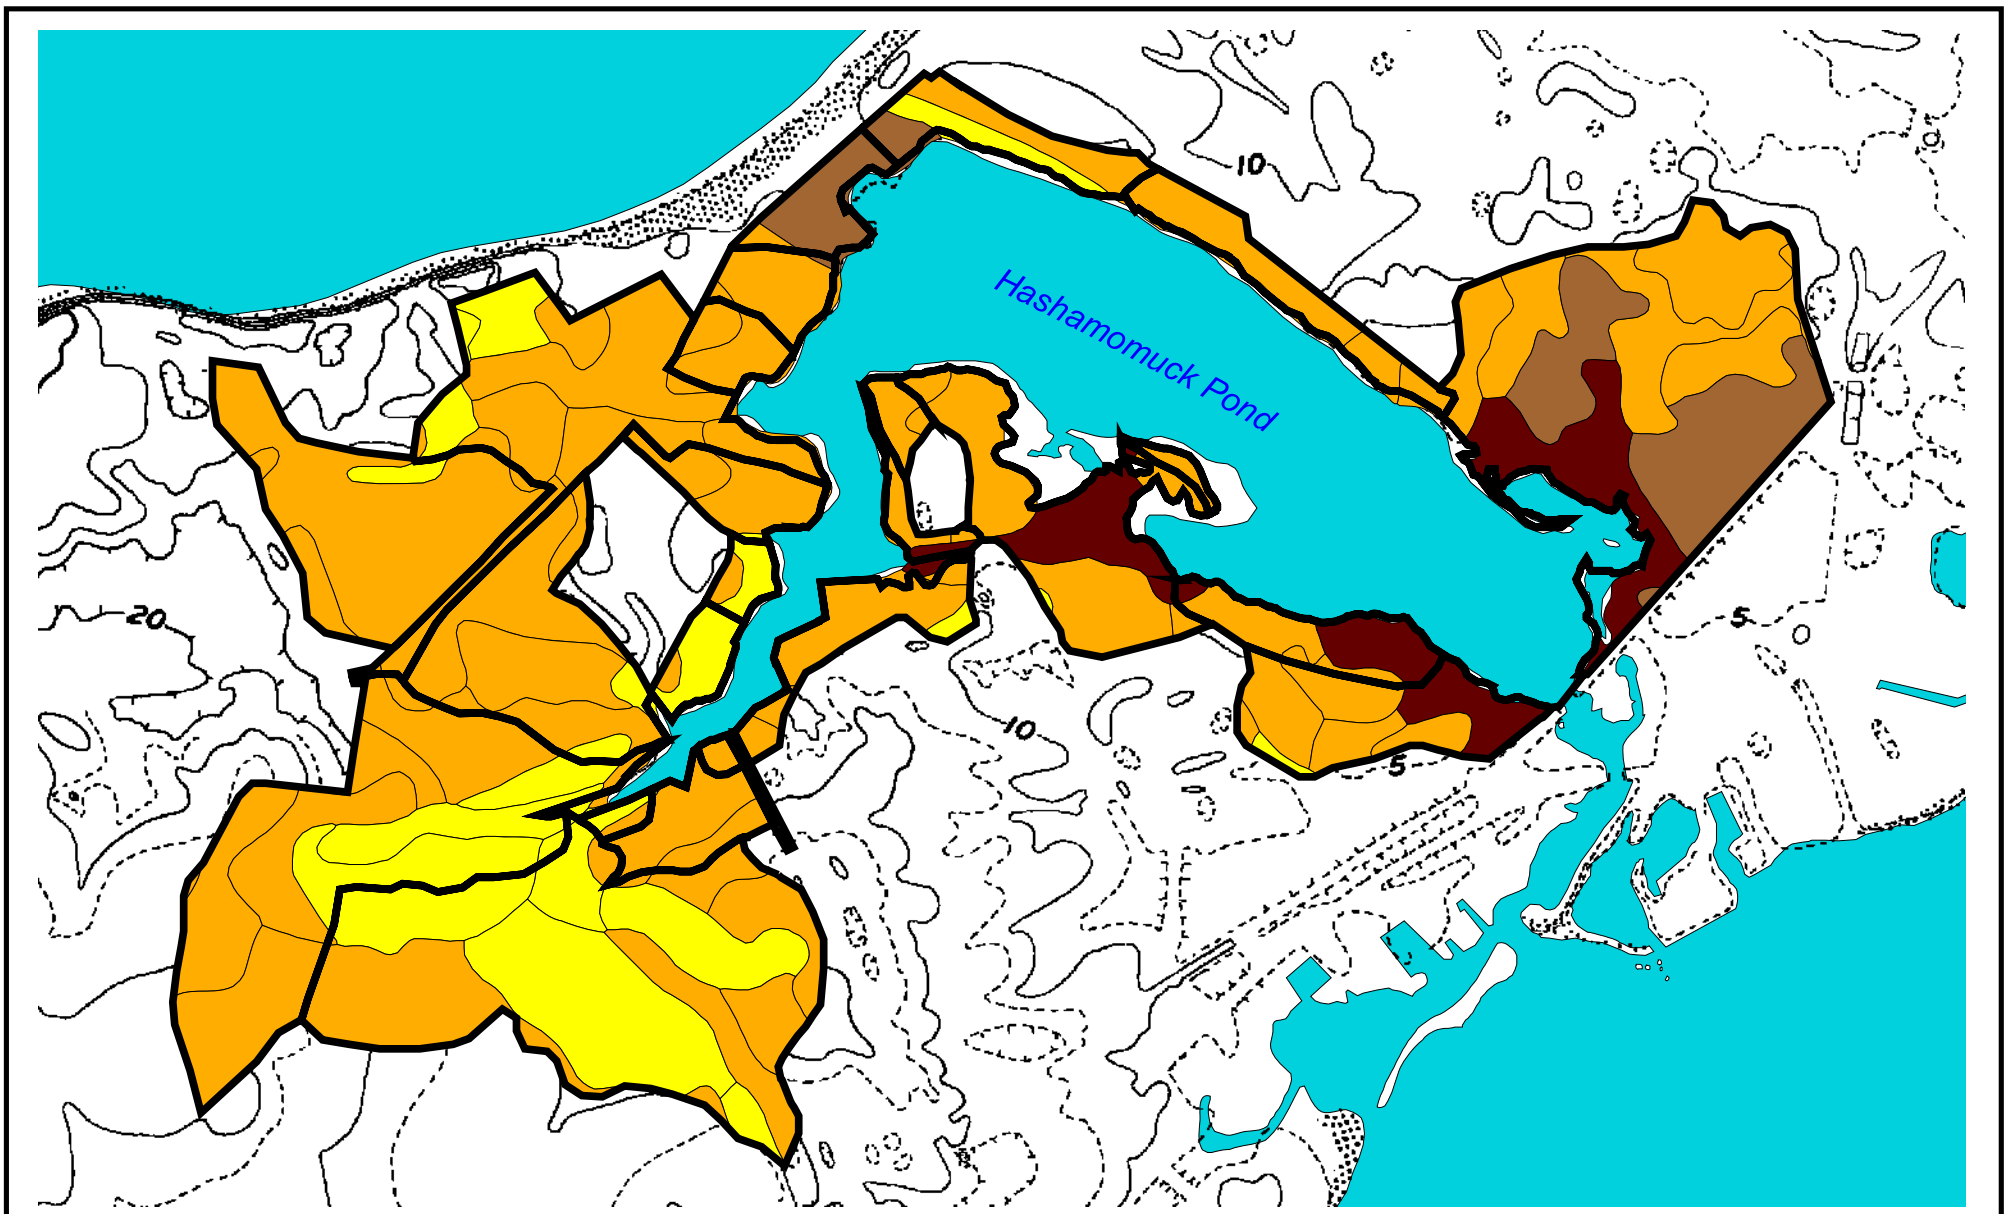

Legend

 Subwatershed Boundaries

Hydrologic Soil Groups



Horsley Witten Group
phone: 908-833-0600
www.horsleywitten.com 

Hydrologic Soil Groups within
Hashamomuck Pond
Watershed

J:\4094 Peconic Bay Estuary\reports\
Hashamomuck Pond

Figure 2-3

Currently, there are no available runoff sampling data for any of the subwatersheds contributing runoff to Hashamomuck Pond. As a result, HW designed the preliminary bacteria model to provide results for a range of loading values taken from scientific literature and sampling in other areas of Long Island. The values available to the user are a minimum, maximum and average value adapted from this research. Research in the area of nitrogen loading coefficients reveals a much more consistent set of values in the literature. As a result, it was not necessary to model a range of nitrogen loading coefficients.

Loading calculations were performed for the Hashamomuck Pond watershed using three target storm events: the 0.25-inch, 0.6-inch and 1.3-inch. The 0.25-inch storm was chosen to potentially isolate the first-flush effect where pollutants are preferentially concentrated in the initial flush of runoff; the 0.6-inch rain event was chosen as the mean of the precipitation data set recorded by NYSDEC in conjunction with their water quality sampling, and the 1.3-inch storm was chosen as the approximate 90th percentile precipitation event, since approximately 90% of the precipitation events, according to NYSDEC data, fall below 1.3 inches. The resulting average concentration in the embayment was calculated assuming a mean low tide depth of 5 feet, a tidal range of 3 feet, and a waterfowl population of 51. A summary of the results for the 0.6-inch precipitation event is provided below in Tables 2-2 and 2-3. A more detailed description of the loading model and associated assumptions can be found in HW's initial stormwater assessment for the Peconic Estuary (HW, 2003). Modeling results in the 2003 report are different than those presented here because field reconnaissance after the 2003 study led to the modification of some watershed boundaries, and the way the model characterized land use for some large parcels. A number of large parcels are zoned for higher density residential occupancy than is currently occurring. In the current version of the model for existing conditions, those parcels are treated as open space (which the majority of the parcel areas actually are) rather than as zoned residential land use.

Table 2-2. Summary of GIS-Based Bacteria and Nitrogen Loading Model for Hashamomuck Pond Under Existing Conditions for the Mean, 0.6-Inch Precipitation Event

Subwatershed	Modified Curve Number*	Runoff Volume (liters)	Bacteria Load (millions of orgs)	Nitrogen Load (pounds)
1	78	1,381	290	0.00
2	81	6,065	1,280	0.02
3	79	4,749	1,000	0.02
4	83	23,149	5,100	0.10
5	98	29,438	16,130	0.27
6	81	714	170	0.00
7	86	35,443	9,860	0.17
8	86	4,692	1,170	0.02
9	78	3,378	770	0.01
10	92	801,534	109,820	5.91
11	87	143,117	19,370	0.90
12	85	125,872	36,100	0.65
13	86	137,771	17,480	0.86
14	89	41,865	6,020	0.18
15	87	29,800	7,870	0.14
16	87	33,221	7,450	0.14
17	85	27,308	7,890	0.13
18	87	45,921	12,480	0.22
19	90	639,323	88,330	3.98
20	77	0	0	0
21	76	0	0	0
22	90	69,660	23,400	0.40
23	84	7,175	1,660	0.03
24	78	92	20	0
Total		274,006	145,580	6.53

*Modified for small storm hydrology based on research and methodology by Pitt (1987) as described in the Peconic Estuary Stormwater Assessment and Planning Tool (HW, 2003).

Table 2-3. Comparison of Average Embayment Concentrations Predicted by the Model Under Existing Conditions with Measured Concentrations in Hashamomuck Pond

Range of Wet Weather Measurements (orgs/100 mL)	Geometric Mean of Wet Weather Measurements (orgs/100 mL)	Modeled Concentration from Minimum Coefficients* (orgs/100 mL)	Modeled Concentration from Average Coefficients* (orgs/100 mL)	Modeled Concentration from Maximum Coefficients* (orgs/100 mL)
2.9 – 2,501	34	2.5	26.6	50.7

orgs = Number of Organisms

mL = Milliliters (1x10.³ Liters)

*Coefficients based on the minimum, average and maximum values found in literature review.

2.3 Existing Land Development Review Process

Proposed development of land in the Town of Southold is governed by the Code of the Town of Southold, New York (the Code), which includes provisions regulating the subdivision of land, development within flood hazard areas, and development or alteration within wetlands or within 100 feet a wetland. In addition, specific types of development projects that are designated Type I projects under the NY State Environmental Quality Review Act (SEQRA) are required to go through an environmental quality review process. These land development requirements of the Town of Southold are described in more detail below.

Projects involving the subdivision of land must seek permit approval by the town Planning Board. There is no differentiation between minor and major subdivisions in the Southold Code. The first step in preparing a subdivision submittal is the preparation of an existing resources and site analysis plan (ERSAP). Wetlands and waterways within the subdivision plan must be shown on the ERSAP, along with flood-prone area, aquifer recharge areas, soils, viewsheds and other resource areas. All proposed subdivisions are then required to follow the primary and secondary conservation area design process, which includes developing a Sketch map by first placing houses on the ERSAP base map with the goal of avoiding conservation areas, and then placing roads and driveways in accordance with design standards to connect the houses. Stormwater must be maintained onsite within the subdivision, and all historic drainage patterns must be preserved on a subdivision site. Once the Planning Board approves that plan, the preliminary and then final plat plans are submitted. Drainage plans, details and design calculations must be submitted in both of submittal stages for review by the Planning Board and Engineering Department, which will review the plans to ensure compliance with the Highway Specifications of the local code. Final road and drainage plans are required to be bonded until completion. Erosion and sedimentation controls are required during construction.

Site Plan Approval under the Zoning Code is required for all projects, except for single-family residential homes and accessory uses on a single and separate lot. This approval process is handled through the Building Inspector, who calls upon the Planning Board for comments. Site plan submittals must include general grading and drainage information, and stormwater must be retained on-site, in conformance with the Southold Highway Specifications in the local code.

Wetlands are protected from adverse impacts of alteration through the Wetlands Law of the Town of Southold, which requires a permit for work generally within 50 feet, or sometimes up to 100 feet of a wetland, depending upon the type of wetland and activity. This process is implemented by the Board of Trustees. Permits may include stormwater upgrades on an existing site in order to ensure that all stormwater from a 2-inch rainstorm is maintained on the site. Certain limited projects listed in the local law that are expected to have minimal impact of the adjacent wetland can be approved through a simpler administrative permit process.

Projects requiring construction in the flood hazard areas, as mapped by FEMA on the Flood Insurance Rate Maps for Southold, require a floodplain development permit, the purpose of which is to protect human health and welfare, and property. Applications are reviewed and projects are monitored by the building inspector.

In accordance with the Code and SEQRA, certain projects must complete an Environmental Quality Review process. Projects that fall into the category of Type I actions are required to file an Environmental Impact Statement (EIS).

There is currently no specific land development control mechanism that would require a project proponent to assess or mitigate for potential nitrogen loading from stormwater runoff from a proposed project. However, revegetation of a buffer area to a wetland must be with native vegetation and without the use of fertilizers and pesticides. It is widely accepted that sources of nitrogen on a site may include septic systems, fertilizers on lawns, stormwater runoff, domesticated animals, or wildlife. Traditional on-site septic systems, even those sited properly according to code, still contribute nitrogen to the groundwater and, ultimately, to Hashamomuck Pond.

2.4 Existing Stormwater Infrastructure and Maintenance

The existing municipal stormwater infrastructure in the Hashamomuck Pond watershed includes deep sump and leaching catch basins, roadside drainage ditches and swales, and detention and infiltration basins. The Southold Highway Department is responsible for maintaining the municipal stormwater infrastructure. There is no set schedule for regular stormwater maintenance but when there is a drainage problem, the Highway Department addresses it on an individual basis. Every road is swept at least once per year, starting in the spring after the last snowfall. The town Highway Department noted that there are many stormwater improvement projects currently being performed throughout the town.

Private land owners are responsible for the inspection and maintenance of their own on-site stormwater management.

2.5 Pollutant Loading Assessment – Future, Buildout Conditions

The model developed for HW's initial stormwater assessment for the Peconic Estuary Program (HW, 2003) used the most current available GIS-based land use data. These model results therefore provide an estimate of pollutant loading to the embayment under existing conditions. As part of continued assessment of Hashamomuck Pond, HW developed an approach to examine potential changes in land use patterns based on applicable local regulations. The original nitrogen and fecal coliform bacteria loading model runs were updated to include estimates for future land development. Using the 2001 Suffolk County Land Use database as the foundation for this exercise, HW used two essential pieces of information to update the model. First, local Zoning Codes were consulted to determine the allowable uses throughout each watershed and the minimum lot sizes associated with these uses. Second, HW used wetland coverages from 1994 in conjunction with aerial imagery to determine the extent of wetlands on zoned buildable areas. The following assumptions were employed to determine buildout conditions.

1. Wetland coverages were used to eliminate portions of existing parcels that are undevelopable.
2. Minimum lot sizes from existing Zoning Codes were used to eliminate non-conforming undeveloped parcels from the future use analysis.
3. Areas identified as "open space" by the Suffolk county land use database are protected as open space and therefore not developable in the future.
4. Remaining areas of existing "Agriculture" were identified that show potential for development. These areas were cross-referenced with the Suffolk County Planning Department's *2001 Land Available for Development, Long Island Sound Study, Suffolk County North Shore Watershed Management Program*.
5. Existing aerial photography was reviewed to identify any existing features or structures that show the land as already developed. This portion of the analysis also included a qualitative assessment of whether a parcel is reasonably accessible.

After this five-step process, the remaining Agriculture use in each watershed was assumed to be developable. According to the existing Zoning Codes, the land use codes of these developable tracts were changed to their most likely future use, and the model was run again. Where significant tracts of wetland covered a portion of a developable lot, these areas were omitted from the future development profile.

Under buildout conditions, the Hashamomuck Pond watershed is projected to be a mix of low and medium density residential development and open space. Although agriculture makes up a significant portion of the watershed under existing conditions, most of these areas could potentially to be converted to low density residential development.

Table 2-4. Future Change in Land Use - Hashamomuck Pond Watershed

Land Use Category	Existing Area (Ac)	Future Area (Ac)	Percent Change
Low Density Residential	33.7	121.1	259%
Medium Density Residential	77.4	77.4	0%
High Density Residential	4.3	4.3	0%
Commercial	5.1	5.1	0%
Industrial	0.0	0.0	0%
Institutional	0.8	0.8	0%
Open Space	192.4	197.5	3%
Agriculture	93.1	0.5	-99%
Vacant	0.0	0.0	0%
Transportation	25.6	25.6	0%

Future loading calculations were performed for the Hashamomuck Pond watershed also using the three target storm events. Similar to the original parameters, the resulting average concentration in the embayment was calculated assuming a mean low tide depth of five feet, a tidal range of three feet, and a waterfowl population of 51. A summary of the results for the 0.6-inch rain event is provided below in Table 2-5. Several of the subwatersheds demonstrated significant decreases in both bacteria loading and nitrogen loading. This is the result of agricultural lands being converted to low density residential development, since agricultural lands supply more runoff, bacterial loading and nitrogen loading than low density residential development.

Table 2-5. Summary of GIS-Based Future Bacteria and Nitrogen Loading Model for Hashamomuck Pond for the Mean, 0.6-Inch Precipitation Event


Subwatershed	Modified Curve Number	Runoff Volume (liters)	Bacteria Load (millions of orgs)	Increase in Bacteria Load from Existing (millions of orgs)	Nitrogen Load (pounds)	Increase in Nitrogen Load from Existing (pounds)
1	78	1,381	290	0	0.00	0
2	81	6,065	1,280	0	0.02	0
3	79	4,749	1,000	0	0.02	0
4	83	23,149	5,100	0	0.10	0
5	98	29,438	16,130	0	0.27	0
6	81	714	170	0	0.00	0
7	86	35,443	9,860	0	0.17	0
8	86	4,692	1,170	0	0.02	0
9	77	0	0	-771	0.00	-0.01

Subwatershed	Modified Curve Number	Runoff Volume (liters)	Bacteria Load (millions of orgs)	Increase in Bacteria Load from Existing (millions of orgs)	Nitrogen Load (pounds)	Increase in Nitrogen Load from Existing (pounds)
10	85	168,375	40,040	-69,778	0.79	-5.12
11	82	28,448	6,200	-13,177	0.12	-0.78
12	85	125,850	36,100	-5	0.65	0
13	81	21,415	4,540	-12,933	0.09	-0.78
14	89	41,865	6,020	0	0.18	0
15	87	29,800	7,870	0	0.14	0
16	87	33,221	7,450	0	0.14	0
17	85	27,308	7,890	0	0.13	0
18	87	45,921	12,480	0	0.22	0
19	84	181,575	39,700	-48,632	0.73	-3.25
20	77	0	0	0	0.00	0
21	76	0	0	0	0.00	0
22	90	69,660	23,400	0	0.40	0
23	84	7,175	1,660	0	0.03	0
24	78	92	20	0	0.00	0

As part of the modeling of both existing and future conditions, HW identified the three subwatersheds that contributed the highest levels of pollution. Figure 2-4 illustrates the highest contributors of fecal coliform bacteria for both existing and future conditions. Under existing conditions, subwatersheds 10 and 19 together contribute more than half of the fecal coliform loading for the entire watershed. Subwatersheds 10, 12 and 19 will continue to be the highest contributors of fecal coliform loading under buildout conditions, although it is estimated that the loading will be more even distributed amongst the subwatersheds.


Under existing conditions, subwatersheds 10 and 19 also contribute the most nitrogen, together providing approximately 70% of the total watershed nitrogen loading (Figure 2-5). Buildout conditions provide the same scenario for nitrogen as they did for fecal coliform bacteria, with subwatersheds 10, 19, and 12 being the highest contributors of nitrogen at 19%, 17% and 15% of the total nitrogen loading for the Hashamomuck Pond watershed.

Figure 2-4. Hashamomuck Pond watershed – highest priority subwatersheds for fecal coliform loading under existing and future conditions.

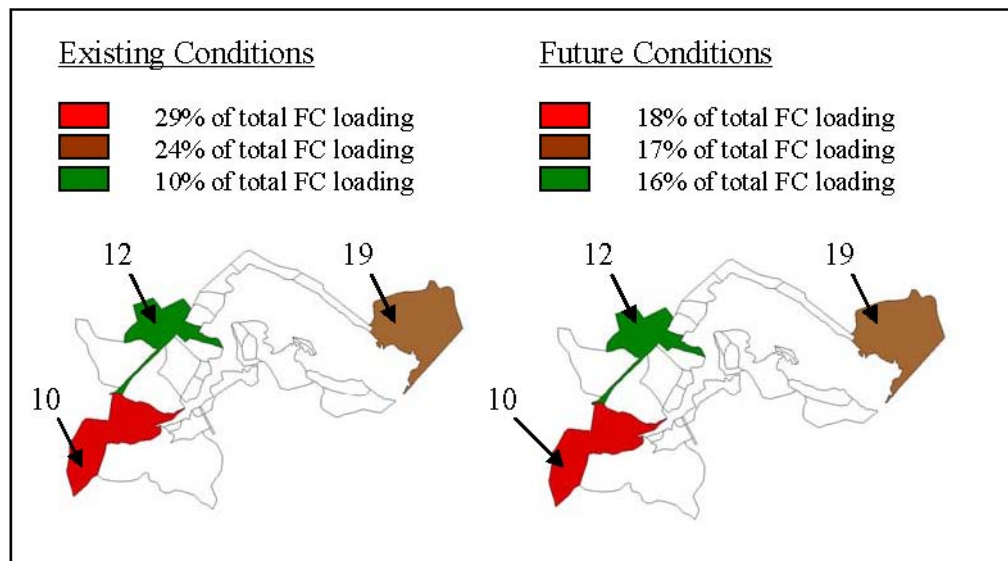

*The subwatershed numbers for those subwatersheds contributing the highest estimated pollutant loading are labeled in the diagram above.

Figure 2-5. Hashamomuck Pond watershed – highest priority subwatersheds for nitrogen loading under existing and future conditions.

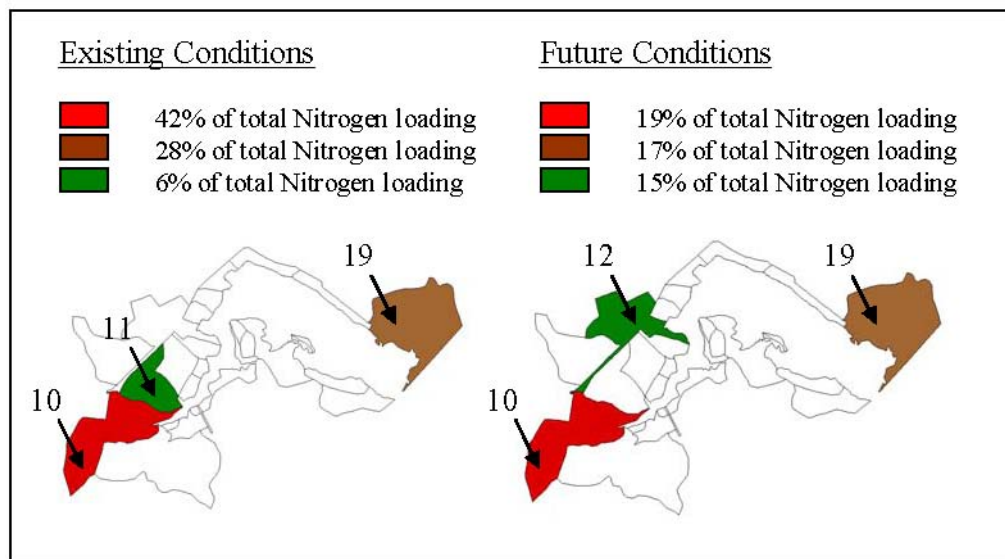

*The subwatershed numbers for those subwatersheds contributing the highest estimated pollutant loading are labeled in the diagram above.

In order to control potential future loading from Subwatersheds 10, 12, and 19, it is recommended that stormwater management controls be employed that allow for enhanced nitrogen and bacterial removals. Infiltration of stormwater runoff (with pre-

treatment) from all impervious and pervious surfaces, buffers between lawns and water resources, and other best management practices (BMPs) described further in sections 3 and 4 that remove 50% of the total nitrogen and 90% of the fecal coliform can reduce future loads accordingly.

3.0 STORMWATER MANAGEMENT PROGRAMMATIC OPPORTUNITIES

3.1 Recommendations for Modifications to Land Development Review Process

The land development review process can be improved to reduce potential impacts to the water quality in the Pond by implementing the use of comprehensive and uniform stormwater standards for new development and redevelopment. These standards can be revised to include explicit stormwater treatment requirements to reduce nutrient loading as well as suspended solids, bacteria and other toxics to the groundwater and the Pond, as well as to improve erosion control. The Planning Board could use this set of standards as a uniform reference to improve consistency in stormwater design and management throughout the Peconic region. These standards could be incorporated directly into the language of the subdivision regulations or as a separate policy document that can be referenced by the subdivision regulations. This second option allows more flexibility to update the policy as technologies advance and conditions change, without having to formally update the subdivision regulations.

The standards could include a pre-approved list of appropriate stormwater best management practices, along with design guidelines for proper siting, sizing, installation and maintenance of the practices. As a starting point, specific sections of The New York State Stormwater Management Design Manual (NYS DEC, August 2003) should be referenced as the general reference for stormwater design. This manual provides a set of stormwater practices, sizing criteria and performance criteria, and describes in detail the proper design, limitations, and effectiveness of a host of practices. Those practices that are more effective than others for nitrogen and bacteria removal (e.g., bioretention and constructed wetlands are better than swales) should be promoted or required by the town versus the use of other practices. For example, some research studies have shown that catch basin inserts (proprietary BMPs gaining popularity in some areas due to easy and low-cost installation) have low removal rates for nitrogen, high maintenance burdens for communities, and should be implemented sparingly. Catch basin inserts also have not been sufficiently studied to estimate bacteria removal, but their operation characteristics are such that it is highly unlikely that bacteria will be reduced at significant levels. See Appendix A for more details and some references for these findings. BMPs with high nitrogen and bacteria removal capabilities that should be promoted include constructed wetlands, bioretention facilities, organic/sand filters, and infiltration practices.

The New York manual also provides useful landscaping and site layout techniques to reduce pollutant loading to receiving waters, which may be useful to include in the town's list of practices and standards. These site layout techniques include buffer standards for separating development from surface waters. Buffers are effective for controlling nitrogen-containing runoff from turf areas as well as discouraging nuisance geese populations.

Recommendations:

- Adopt a short, pre-approved list of BMPs effective at nitrogen and bacteria removal.
- Require appropriate landscaping and site layout techniques.

3.2 Recommendations for Maintenance of Stormwater Infrastructure

In the Town of Southold, ownership of stormwater infrastructure is shared by the Town and individual landowners. Roadway drainage is collected into a municipal infrastructure that generally terminates with infiltration into the groundwater through leaching catch basins and infiltration basins, as well as direct discharges in some cases. When a new subdivision road is constructed and accepted by the Town, the responsibility for the drainage infrastructure also passes to the Town. The drainage infrastructure that collects and treats stormwater on each individual lot is the responsibility of the landowner to inspect and maintain.

In order to function as designed over the long term, stormwater infrastructure must be maintained regularly. This is particularly important with structures designed for infiltration, such as leaching catch basins, which may receive stormwater that has not been pre-treated and therefore contains oils, greases, organic matter, and suspended sediment that can clog the system. Depending on the land use, inadequate pretreatment may allow for dissolved pollutants to enter groundwater and lead to both health and environmental threats. On individual properties, runoff from rooftops and driveways that is not properly infiltrated into dry wells or other onsite structures could back up into basements, cause nuisance puddling, and in some cases, lead to surface discharges and erosion rather than infiltration.

The following is a set of recommendations to improve the system by which maintenance is performed, and ensured, on stormwater practices and infrastructure in the Hashamomuck Pond watershed and the Town of Southold.

Recommendations:

- Implement a formal municipal stormwater inspection and maintenance schedule for municipally-owned stormwater infrastructure. Regular inspections should be performed twice per year, once in the early spring, prior to the spring rains but after the winter snow melt, which transport winter sands and salts from the roads, and once in the fall after the large release of organic matter such as leaves and debris. Cleanouts of leaching catch basins and other sedimentation practices are recommended to be performed every year, but at a minimum of every 2-3 years, and on an additional as-needed basis. This will help reduce clogging of infiltration devices and sediment transport through scouring and resuspension during larger spring rains.

- Maintain a ‘working’ map of all municipally-owned stormwater practices. If maintained in a GIS or other database, the database can also be used to track when maintenance was performed, and to document when certain structures experienced problems.
- Implement a formal highway and engineering department review and approval processes of all stormwater management designs for subdivisions and site plan review projects against a set of clearly defined design standards. This will provide consistency and among designs, bring designs up to a minimum state-of-the-art standard, and provide applicants with a design guidance. The highway and engineering departments also should formally review and approve all operations and maintenance plans for subdivisions that are planned for acceptance by the Town, and then adopt those plans into their regular inspection and maintenance schedule.
- Develop a brief Landowner’s Guide for Maintenance of Stormwater Structures. This guide could focus on inspection and maintenance of on-lot stormwater practices for both residential and commercial/industrial sites. It can also describe things that local landowners can do to assist the Town in maintaining public infrastructure, such as cleaning off debris from around nearby catch basins and reporting stormwater infrastructure malfunctions and flooding problems.

3.3 Public Education and Outreach – Recommended Focus Areas

An education and outreach campaign can be used to target specific audiences to try to positively influence human behaviors in the watershed with potential ecologic impact. At the same time, the program can reach out to a broad audience to raise awareness that land use and human activity within the watershed has a direct effect on the health and quality of the coastal resources. The theory is that if people understand the connection between their individual activities and the coastal resource, they will be more apt to alter their behavior. Many of the behaviors assessed during the field inventories discussed in Section 4 (Neighborhood Source Assessment, Streets and Storm Drain Assessment, and Hot Spot Inventory) can be positively influenced by public education. The key public education issues in the Peconic watersheds that will help address the key goals of the CCMP (see Chapter 1) are:

- waterfowl management;
- lawn management;
- pet waste management;
- stormwater management; and
- septic system maintenance.

These focus areas are described below, followed by a description of recommended education and outreach programming techniques. These techniques are intended to be a

menu of possible strategies that can be employed in various combinations depending on time, budget and target watershed audience.

3.3.1 Waterfowl Management

There are a handful of methods that are used in various situations to reduce the populations of waterfowl in and around a waterbody, thereby reducing nutrient and bacteria loads to that area. These include habitat modification, frightening, exclusion, discontinuation of feeding, live capture, hunting, and egg addling. Some of these methods require changes in practices by the landowners in the area, and some require professional or third-party assistance. For example, habitat modification refers to the modification of large expanses of open grassed areas that are often mowed directly to the water's edge. These areas are attractive to waterfowl such as geese, swans and ducks that like to have a clear sight line and open access to the water. Modifying these open spaces to allow for a vegetated buffer along the water edge makes the area much less attractive to these waterfowl. A 50-foot vegetated buffer, with vegetation growth up to 3-4 feet high, makes a large impact in deterring geese and swans by breaking up the open lawn space from the open water. Creation of this buffer, however, often depends on the will of the land owner to convert mowed area to vegetated area. This is where public education comes into play.

Public education implementation tools include: mailers, television and radio advertisements, newspaper articles and signage. One common public education method is the implementation of a demonstration project. If there are publicly owned properties along the waterfront, or areas owned by a willing owner, a buffer area of open mowed lawn could be allowed to revegetate, forming at least a 50-foot wide buffer along the water's edge. Photographs and information about the former presence of waterfowl and depicting the look of the former vegetation versus the revegetated area relays important information to a wider audience about both the goal of the program as well as something that they can visualize. Signage describing the area as a waterfowl management buffer could be placed in public view, and then an explanation of the site could be presented in mailers or brochures for others to see. Often it is easier for people to implement something once they know what it will look like, and they can have reasonable expectations about whether it will be effective.

An added bonus from allowing mowed and manicured lawn areas to revegetate is that maintenance is significantly lower and less fertilizer or other lawn chemicals would be used. This leads into the next area of focus for public education in the Peconic region, which is lawn management.

Other methods of waterfowl management include live capture of the birds, egg addling, and hunting. Egg addling is a method used to control the hatching of eggs. The eggs in a nest are shaken, making them nonviable, and then replaced in the nest. These methods require permits from the US Fish and Wildlife Service and may require state or local permits as well. In some cases, these methods may face local opposition; but in severe

situations of uncontrolled waterfowl populations, a local municipality may opt for these more direct methods.

3.3.2 Lawn Management

Many Peconic area lawns are maintained over the majority of the available lot area, irrigated with potable water, and treated with fertilizers and herbicides. Some lawns consist of non-native grasses. Public education can be used to help change these practices and teach homeowners about alternative lawn care practices. Smaller lawns are easier to maintain and allow room for larger more diverse and colorful vegetation. The use of native grasses and compost folded into the soil can reduce the need for additional pesticides and herbicides and will provide a more drought-resistant groundcover, which will in turn require less irrigation. In cases where irrigation is still required or preferred, the homeowner can use a variety of methods to reduce irrigation demand, including rain barrels or cisterns to catch rooftop runoff for irrigation, or programmed irrigation systems to water their lawns only during early morning or late evening hours.

Providing this guidance to homeowners and other landowners within the watersheds requires an effective public outreach plan. This can be done through a media campaign, which could be a combined effort with the other focus areas. It could also benefit from a demonstration project site that would show other homeowners what a smaller, more natural lawn and yard with more diverse landscaping can look like. A demonstration site could be a mechanism to provide information about cost savings and time savings due to lower maintenance requirements, and to collect information about any increase in song birds, decrease in nuisance species, etc.

There are several example programs in the northeast that promote healthy and sustainable lawn management. The Rhode Island Cooperative Extension GreenShare Program (<http://www.uri.edu/ce/ceec/greenshare.html>) and the URI Nonpoint Education for Municipal Officials (NEMO) Healthy Landscapes program (<http://www.uri.edu/ce/healthylandscapes/index.html>) provide guidance on sustainable gardening and lawn maintenance to promote the use of native vegetation that is suitable for the soil and site conditions.

A program such as the Bayscapes Program in the Chesapeake Bay Watershed is a good example. This program provides guidance to homeowners and landowners within the Chesapeake Bay Watershed about developing and installing “Bayscapes,” which are landscapes other than turf that are elected to reduce irrigation demand, improve habitat, reduce non-point pollution, and reduce erosion, while also appealing to gardeners. This program uses a website (<http://www.fws.gov/chesapeakebay/bayscapes.htm>), fact sheets and examples to provide information.

In Westchester County, New York, the Grassroots Healthy Lawn Program was an initiative of the county government and a non-profit organization called Grassroots Environmental Education, based in Port Washington on Long Island. The goal of this initiative was to promote healthy lawn management by reducing the use of pesticides and

other toxins on lawns throughout the county. The program provided training to landscapers, provided public outreach services, served as a liaison between manufacturers and retailers, and developed a list of natural lawn care product suppliers for public distribution (<http://www.ghlp.org/>).

3.3.3 Pet Waste Management

Pet waste can be a nuisance to the public in addition to contributing bacteria and nutrients to a water body when it gets washed off the ground surface by rain fall and stormwater runoff. For those people that have pets, picking up after your dog can also be a nuisance. However, more and more people are realizing the aesthetic and environmental health benefits of cleaning up pet waste from public areas and their own back yards, and in many communities throughout the country now there are “pooper-scooper” laws requiring people to clean up. While the idea of picking up after your dog may seem absurd at first, a few pooper-scooper signs, some pooper scooper bags, and the risk of being seen not picking up after your dog can go a long way. A media campaign can easily be created with a sense of humor to get the message across, and signage at public open spaces and along walking trails can bolster the message. Once the signage is up, people can learn a new message.

3.3.4 Stormwater Management

Homeowners and the general public in a watershed can play an important role in looking after the systems on a day-to-day basis. This is particularly true in subdivision settings, where the stormwater management practices may be slightly off the beaten track for the local Public Works Department and where some small stormwater management practices may be dispersed throughout the subdivision or even on individual lots. After all, a failure in the stormwater management system could mean a flooding situation or could create a sedimentation problem at the discharge location that directly affects local residents.

A stormwater awareness program developed and implemented through the local municipality can be a very useful tool in promoting effective and sustainable stormwater management. Mailings and inserts with local billings and other municipal communications to residents can raise awareness and inspire vigilance among local residents. Residents can help to monitor swales, leaching systems, catch basins and discharge locations to see that they are functioning properly. They can act as a first defense against failures and can report problems to the public works department. In the fall, residents can help by clearing leaves and debris from the catch basin grates and by not throwing leaves and debris into drainage swales, onto roadways, or into other stormwater pathways. In the winter, the same goes for snow that is shoveled and plowed off driveways and sidewalks. They can also help by not washing vehicles excessively often, which can use large volumes of potable water, and by not washing them in their driveways, which can contribute phosphorus from the soap into the stormdrain system. Instead, residents should use modern commercial car washing facilities that are outfitted with a wash water collection and treatment system, and opt for environmentally friendly soaps if possible.

Residents can also install on-site retrofits to improve the stormwater management on an individual house lot. These can include installation of rain barrels to collect water from rooftops through roof leaders. Rainbarrels that are properly fitted with tightly closed solid tops or a mesh screen at the top should alleviate mosquito concerns as these precautions will prevent mosquito larvae from hatching out and leaving the barrel. A rain barrel program could be established through the municipalities or a local non-profit organization, in conjunction with a rain barrel distributor, to sell rain barrels at a discounted price to community members. In addition, other on-site retrofits may include installation of a dry well to collect and infiltrate roof runoff and overflow from the rain barrels, if they have been installed. These and a number of other potential best management practices that could be used to retrofit a site are described in more detail in Section 4.4.

3.3.5 Septic System Maintenance

Septic systems require regular maintenance and inspection, and require that homeowners are actively aware of the location and operational characteristics of the system. Most systems require that the septic tank be pumped out approximately every 3-7 years (depending upon the input to the system and the size of the settling tank) to remove the solids that have accumulated over that time period.

There are many septic system maintenance additives marketed to reduce the accumulation of solids and the frequency of pumping of the septic tank. However, these additives can frequently be harmful to the system, particularly when used inappropriately, by impairing the microbial community responsible for much of a system's treatment ability, by reducing the effectiveness of the leach field, and by contributing chemical contaminants to the underlying groundwater. This is particularly important in coastal areas characterized by sandy soils where groundwater movement to receiving waters can be very rapid. A properly designed, installed, and maintained septic system should not need chemical additives to function properly. It is important for homeowners to be aware of what they put into their septic system and what the potential effects may be. Without proper maintenance, the system can lose significant treatment capacity and can clog up. This can cause a failure where the system's leach field fails to leach and the leachate breaks out at the ground surface. Alternatively, it could back up into the household. Both of these scenarios cause a public health concern as well as a threat to local water resources.

A public mailing from the municipality can promote septic system maintenance by reminding residents of maintenance needs. The New York Onsite Wastewater Training Network at the State University of New York at Delhi provides trainings throughout the state and is a wealth of information about septic systems, including proper siting, design and maintenance. While that program's training is geared primarily at engineers and practitioners, the New York State Department of Health website provides information and a printable pamphlet aimed at residents that describes proper septic system operation and maintenance. This pamphlet could be updated to include references to local water

resources and connect the need for septic system maintenance to the local resources that may be threatened or experiencing poor water quality. The Rhode Island Cooperative Extension has developed a number of helpful fact sheets aimed at homeowners with information about septic system maintenance, ways to prolong the life of the system, ways to upgrade the system to provide better treatment, the effects of additives, and other useful information.

The Suffolk County Department of Health Services has also produced a brochure entitled, “Home Sewage Disposal Systems in Suffolk County,” which describes a septic tank and cesspool system that is typical of Suffolk County. This brochure, last updated in 2004, could be improved upon at the county or local level to provide additional information about how to upgrade or improve on-site wastewater treatment through innovative wastewater design. This would be useful for homeowners, especially those with aging systems (25-30 years old) and in need of significant repair or replacement.

3.4 Public Education and Outreach – Recommended Programs

The following provides a menu of activities that could be undertaken as part of a watershed-wide or town-wide outreach and education program to address the environmental health of the coastal water resources of the Peconic Estuary. These activities are designed so that they could focus on one or a combination of the five areas discussed above. These activities could be implemented by each municipality, in conjunction with the Peconic Estuary Program, Suffolk County, homeowners’ associations, local schools, or other active citizens groups.

3.4.1 Watershed Awareness Day

Hold a watershed awareness day, perhaps associated with an Earth Day program. The towns and/or villages in the watershed could organize a watershed awareness day to take place along the shore or at an open space within the watershed. This could include educational booths, games related to water quality, demonstrations of innovative technologies, sales of rain barrels and native grass seed, a swim or kayak race, a road race through the watershed, and/or an afternoon or evening clambake. This is a great way to get people outside, making the visual and experiential connection between the coast they love and the watershed in which they live and play.

3.4.2 Media Campaigns

A host of media campaigns could be developed with specific messages regarding applicable management strategies such as residential septic system maintenance, repair or replacement; residential fertilizer management; shoreline vegetation management; car washing; or pet waste management. These campaigns can include fliers and brochures to be distributed at community events or mailed out with utility bills, as well as posters to be distributed and posted in municipal offices, public libraries, schools, and other highly visible areas. Articles, or a series of articles, can be developed for the local newspaper to focus people on watershed management. Television advertisements or stories on local television stations or the local cable access stations can be devoted to homeowner

activities that impact the watershed. Brochures related to pet waste clean up could be handed out with dog licenses and distributed by local veterinarians. These efforts could be tied to the public outreach and education requirements of the State Pollutant Discharge Elimination System (SPDES) permits that may be required for some municipalities regulated as separate storm sewer system communities.

3.4.3 Institution of an "Adopt-a-Watershed" Organization

Such an organization would be tasked with cleaning up litter, monitoring storm drain outfalls, or promoting watershed stewardship. This type of organization can make a big difference just by being aware of the activities within the watershed and along the pond shores. Monitoring of storm drain outfalls can be done with the use of simple water quality kits in conjunction with observations. This activity serves as education, but also as a means to gauge any significant changes that may be occurring in the watershed. This is also a great way to get children involved.

3.4.4 Demonstration Projects

Projects that can be used to illustrate a vegetated buffer, alternative stormwater management techniques, or a low-maintenance lawn can be invaluable in an education campaign. These are typically done on publicly-owned land or on a private individual lot, if there is an enthusiastic and willing home owner. Demonstration projects are helpful because they allow people to see a work in progress and a finished product, so they can know what to expect and they can evaluate the outcome realistically. They can also involve members of the general public in the planning and implementation of the demonstration project, which serves as a great educational experience. Once a project has been undertaken, the development and implementation phases can be documented in photographs which can be used in mailers, brochures, posters, and a media campaign. They can serve as a centerpiece for a local news story as well. Signage about the project can be placed at the edge of the site to catch the attention of passersby and provide educational information and a place to go for more information to anyone who is interested.

One example of a successful demonstration project took place at Long Lake in Littleton, MA. Long Lake was in a deteriorated state due to nutrient loading from nonpoint source pollution. The town used a grant to work with a consultant to retrofit a portion of the Long Lake watershed by installing rain gardens, grassed swales, rain barrels and a constructed wetland park with walkways for the public to enjoy the area and learn about the stormwater management practices. A description of the project, with project design information and photographs, is posted on the state Executive Office of Environmental Affairs website and serves to inform other interested people about the project.

3.4.5 Watershed Clean-up Days

A community or community organization can coordinate a watershed clean-up day to bring volunteers together to pick up litter and solid waste debris throughout the watershed. These events can be fun, and allow people to see water bodies and areas of

the watershed that they may not be familiar with. They help to give people a sense of ownership and stewardship for the watershed beyond the single clean-up event.

3.4.6 School Watershed Science Programs

Science and humanities programs in local schools can help to educate young people on the various themes of watershed management, and the connection between human land uses and the water quality in the Peconic Estuary. Hands-on school programs related to the environment may include water quality monitoring, gardening, recycling, and composting. These programs can serve as a terrific vehicle to teach students about watershed management and stewardship.

3.5 Summary of Programmatic Recommendations

While this section introduced several programmatic opportunities, regular inspections and maintenance of the stormwater infrastructure should be the top priority. Without a long-term inspection/maintenance program in place, any new or existing stormwater BMPs implemented in the watershed will eventually lose effectiveness over time. Even the best BMPs are only as effective as their maintenance plan. Next, the review process for new and redevelopment could be amended to require developers to utilize specific BMPs and alternative site design techniques right from the beginning of a development project, reducing potential water quality impacts. Finally, the various public education focus areas and programs presented above can be very effective in improving the health of the watershed. No one outreach campaign will be effective for all neighborhoods – they should be tailored to target the specific issues in various areas throughout the watershed based on demographics, density, age of the neighborhood, current lawn care methods, etc. Older, more established neighborhoods with mature trees and smaller yards tend to have a lower impact on water quality than new subdivisions with large, cleared lots and highly manicured yards, and different outreach programs would be needed for each.

Programmatic costs can pose a problem for some communities. One way to reduce these costs and improve program effectiveness is to pool resources with other municipalities and agencies. Such coordination could be useful for purchasing shared maintenance equipment such as street sweepers and implementing area-wide educational campaigns.

4.0 STORMWATER MANAGEMENT WATERSHED ASSESSMENT

This stormwater management assessment addresses stormwater runoff as a source of pollutant loading in the Hashamomuck Pond watershed and helps to identify problem areas and potential areas for the installation of stormwater best management practices (BMPs) to reduce the load of stormwater pollutants to the pond. The results of this assessment are then used to recommend site specific stormwater management implementation projects in key locations throughout the watershed. By identifying and prioritizing the most cost-effective retrofit and public outreach opportunities, the town has a reasonable set of specific management options to help achieve many of the goals stated in the CCMP. Successful implementation of the identified opportunities is expected to help reduce stormwater runoff pollution, improve overall water quality conditions, and maintain or improve critical habitat areas.

The existing stormwater management program in the Hashamomuck Pond watershed mainly consists of deep sump and leaching catch basins, roadside drainage ditches and swales, and detention and infiltration basins. Based on this watershed assessment, proposed stormwater BMPs were selected to retrofit the existing drainage system to better manage and treat stormwater before it reaches Hashamomuck Pond.

Potential pollutants and restoration sites for upland areas were also investigated at the same time using the Unified Subwatershed and Site Reconnaissance (USSR) procedure, described in Section 4.7. These upland areas can have significant impacts to the water quality of the receiving bodies. The USSR assessments can identify non-point pollutants of concern for different areas, which can help direct public education efforts and community action, as described in Section 3.



4.1 Assessment Methodology


Results from the “Peconic Estuary Stormwater Assessment and Planning Tool” (HW, 2003) were used in the stormwater management assessment to help direct investigation to the areas where pollutant loading was the greatest. The discreet drainage areas with all the identified drainage structures and outlets within the watershed were overlaid onto the orthophotographs of the area. This provided an opportunity to pre-select sites for investigation based on outlet locations and areas that are open (space for BMPs), publicly owned, and/or untouched (natural wooded land). The watershed and subwatersheds are shown and labeled in Figure 4.1.

A rapid and focused field reconnaissance effort in the Hashamomuck Pond watershed was conducted. Reconnaissance inventory forms were filled out at each site location. These forms were later used to rank sites, highlight potential hotspot locations, assess varying types of neighborhoods and large pervious areas, and inventory various streets and storm drains. For example, if there were evidence of too much lawn maintenance in an area, the recommended actions would include a targeted public education campaign or collaboration with local landscaping companies. If there were many hotspots in a



Legend

-  Hashamomuck Pond Watershed
-  Hashamomuck Pond Subwatersheds



Horsley Witten Group
 phone: 508-833-6600
www.horsleywitten.com

Drainage Area & Subwatershed Map
 Hashamomuck Pond Watershed
 Town of Southold

7/19/06 EC
 J:\4094 Peconic Bay Estuary\GIS\
 watershed_hash.mxd

Figure 4-1

watershed, site specific investigations and potential clean-ups would be recommended. All of the investigated sites were numbered accordingly and discussed in this report. See Figure 4-2 for the site locations. A Watershed Assessment Guide has been included in Appendix B, which includes more details on how to conduct a watershed assessment.

4.2 Storm Drainage Assessment and Mapping


Preliminary drainage areas were first delineated through the use of topographic maps. Topographic maps allow for a reasonable watershed delineation under natural conditions. However, construction of impervious surfaces, the use of stormdrain systems, and grading of land surfaces to accommodate different site designs can significantly alter the overall size and shape of the watershed. Due to these factors, a field survey is required for accurate drainage delineation. In an effort for a more accurate drainage delineation, the Peconic Baykeeper was subcontracted to perform field survey delineations for the four priority embayments within the Peconic region (West Neck Bay, Hashamomuck Pond, Reeves Bay, and Meetinghouse Creek). These delineations included discreet watersheds that were determined through a combination of natural topography and observed structural drainage. The field surveys conducted by the Peconic Baykeeper were then digitized into GIS and overlaid onto basemaps provided by the Peconic Estuary Program (PEP). The storm drainage investigation and mapping exercise were conducted in 2000, and the results of that program were used in this stormwater management assessment.

4.3 Potential Sites and Best Management Practices Selection









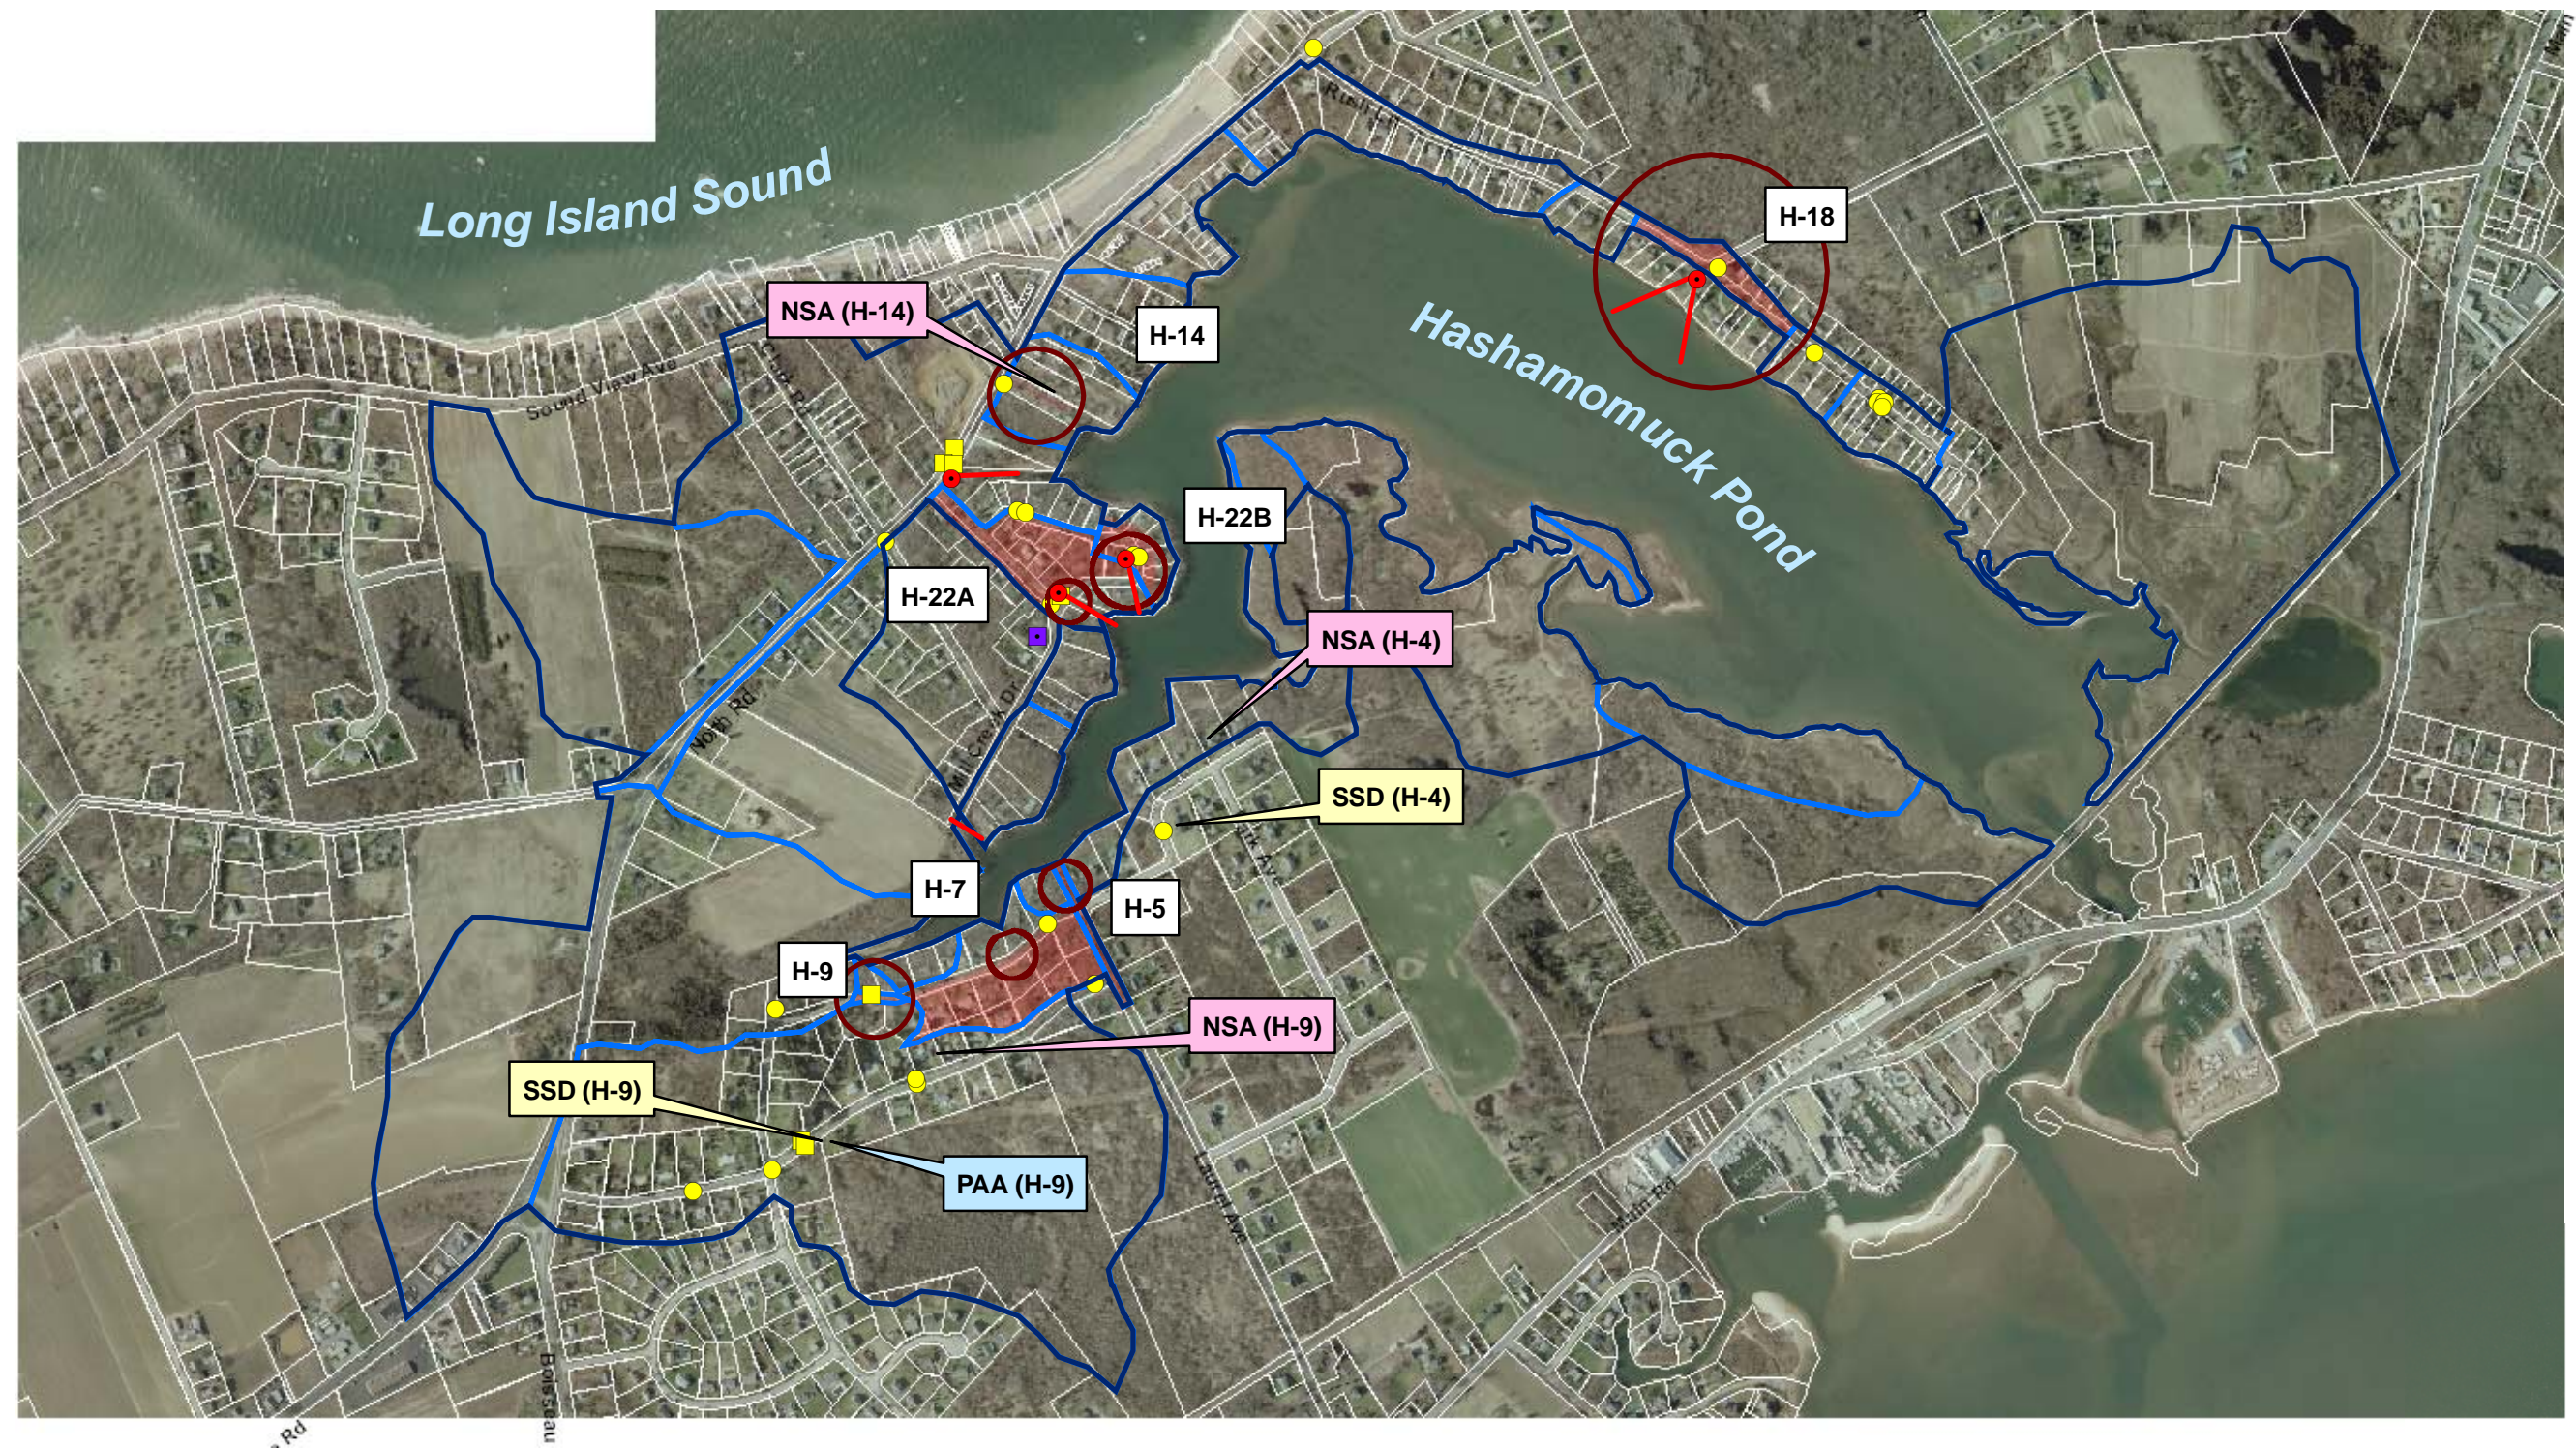




Prior to the field visits for the stormwater management assessment, HW reviewed the existing stormwater assessment data (HW, 2003) and identified potential locations for the installation of stormwater BMPs based on land use, parcel ownership (publicly-owned land was targeted as a priority), outfall locations, potential conflicts with existing utilities, effective stormwater capture area, and pollutant source locations.

A stormwater field reconnaissance team then investigated all potential BMP locations. In addition to the stormwater field team, a habitat protection field team was deployed at the same time to identify potential habitat protection locations in the watershed (discussed in more detail in Section 5.0 of this report). All field work was conducted the week of September 12, 2005.


Six sites were selected from the potential locations for further stormwater investigations based on field assessments of site conditions, physical constraints, and retrofit feasibility (see Table 4-1). Sites were selected in subwatersheds 5, 7, 9, 14, 18, and 22, and the results of the in-depth investigations are described in Section 4.6. For each site, detailed field notes, inventory forms, and photos were collected and can be found in Appendix D.



Legend

- | | |
|--|--|
|  Hashamomuck Pond Watershed |  Proposed BMP Locations |
|  Hashamomuck Pond Subwatersheds |  Proposed BMP Drainage Areas |
|  Outfalls |  Proposed BMP Drainage Area ID |
|  Outlet Catchbasin |  Neighborhood Source Assessment |
|  Infiltration Catch Basin |  Pervious Area Assessment |
|  PEP Stormdrain Conveyance Systems |  Street & Storm Drain |
|  PEP Drywells | |

* Source: Aerial Photo, NYS Office of Cyber Security & Critical Infrastructure Coordination, Spring 2004



Horsley Witten Group
phone: 508-833-6600
www.horsleywitten.com

Field Inventory Locations Hashamomuck Pond Watershed Town of Southold

7/11/06 EC
J:\4094 Peconic Bay Estuary\GIS\
Field_Inventory_Hash.mxd

Figure 4-2

Table 4-1. Summary of Proposed Best Management Practices for the Hashamomuck Pond Stormwater Drainage Area, Long Island, New York

BMP Site #	Location ¹	BMP Concept	D.A. Captured		BMP Design Criteria ²	BMP	Estimated Pollutant Removal Efficiency (%)						Estimated Costs (for Planning Purposes only)			
			Total Area (ac)	Imp. Area (ac)			<i>Fecal Coli.</i> ³	<i>Total N</i> ³	<i>Total P</i> ³	<i>TSS</i> ⁴	<i>Metals</i> ⁴ (Cd, Cu, Pb, Zn)	<i>Hydro-carbons</i> ⁴	<i>Capital Cost</i>	<i>Design, Permitting, Contingency</i> ⁵	<i>Total</i>	<i>Annual Routine Maintenance</i> ⁶
H-5	End of Laurel Avenue	Grass channel to pre-treat and convey surface drainage from the roadway to a bioretention system for half of the roadway. A dry swale for treatment for the other half of roadway. Runoff from the bioretention and dry swale will collect into an oil/water separator.	0.71	0.45	Treatment for the 90% of average annual stormwater runoff volume.	Grass Channel, Bioretention System, Dry Swale, Oil/Grit ⁷ Separator	ND-98	ND-70	9-75	41-99	10-99	ND-62	\$68,000	\$21,000	\$89,000	3% - 7%
H-7	Long Creek Drive	Grass channel on both sides of the roadway to pre-treat and convey surface drainage into a bioretention system (on-line).	6.09	1.4	Treatment for the 90% of average annual stormwater runoff volume.	Grass Channel, Bioretention System	0-98	ND-70	9-75	80-99	42-99	62	\$102,000	\$31,000	\$133,000	5% - 7%
H-9	Bayview Ave	Grass channel to pre-treat and convey surface drainage into a proposed sediment forebay prior to the existing detention pond. Upgrade existing outlet to a low-flow orifice sturcture and provide some pond restoration (incl. removal of tree overhang, introduce more wetland plants, etc.). Proposed pond restoration treats much larger watershed.	0.23	0.16	Treatment for the 90% of average annual stormwater runoff volume.	Grass Channel, Sediment Forebay, Pond Restoration, Low-flow Orifice Outlet	0-65	ND-33	9-55	80-81	24-73	62-83	\$87,000	\$27,000	\$114,000	3% - 7%
H-14	Dons Way	Grass channel on both sides of roadway to pre-treat and convey surface drainage into a bioretention system.	0.13	0.13	Treatment for the 90% of average annual stormwater runoff volume.	Grass Channel, Bioretention System	0-98	ND-70	9-75	80-99	42-99	62	\$38,000	\$11,000	\$49,000	5% - 7%
H-18	Corner of Colony Road & Bayview Avenue	Dry swale on both sides of roadway to pre-treat and convey surface drainage from the roadway. The runoff will overflow into catchbasins and collect in an oil/water seperator prior to discharge into the existing infiltration pit.	2.27	0.59	Treatment for the 90% of average annual stormwater runoff volume.	Dry Swale, Oil/Grit ⁷ Separator	0-ND	ND-15	9-37	41-81	10-71	ND-62	\$87,000	\$26,000	\$113,000	3% - 7%
H-22A	Intersection of Grove Road & Mill Creek Drive	Micro-Bio inlet with a stone curtain to pretreat stormwater prior to discharge into an existing vegetated channel. A sediment forebay is proposed at the outlet prior to discharge into the existing vegetated channel	4.48	0.9	Treatment for the 90% of average annual stormwater runoff volume.	Micro-Bio Inlet, Sediment Forebay	65-98	33-70	51-75	80-99	24-99	62-83	\$77,000	\$24,000	\$101,000	3% - 7%
H-22B	Grove Road	Dry swale on both sides of roadway to pre-treat and convey surface drainage from the roadway. The runoff will overflow into catchbasins and an oil/water separator and discharge into Hashamomuck Pond.	1.34	0.34	Treatment for the 90% of average annual stormwater runoff volume.	Dry Swale, Oil/Grit ⁷ Separator	0-ND	ND-15	9-37	41-81	10-71	ND-62	\$57,000	\$17,000	\$74,000	3% - 7%

D.A. = Drainage Area

1 Note: Site #'s refer to preselected sites. Based upon actual field visits, some sites were removed from further consideration.

2 Note: Because this project is a retrofit of an existing stormwater system and is not being developed as the direct result of a new construction project, the proposed BMPs are not subject to the full suite of stormwater management standards in the New York Stormwater Management Design Manual.

3 Source: Center for Watershed Protection. 1998. Cost and Benefits of Storm Water BMPs, Final Report 9/14/98. Prepared for: Parsons Engineering Science under EPA Contract 68-C6-0001. WA 2-15. Task 6.

4 Source: Schueler, T. 1997. Comparative Removal Capability of Urban BMPs: A Reanalysis. Watershed Protection Techniques, 2(4): 515-520.

5 Note: This cost is estimated to be 30% of the Capital Cost. Source: Center for Watershed Protection. 1998. Cost and Benefits of Storm Water BMPs, Final Report 9/14/98. Prepared for: Parsons Engineering Science under EPA Contract 68-C6-0001. WA 2-15. Task 6.

6 Note: This cost is estimated to be a percentage of the Capital Cost. Source: Center for Watershed Protection. 1998. Cost and Benefits of Storm Water BMPs, Final Report 9/14/98. Prepared for: Parsons Engineering Science under EPA Contract 68-C6-0001. WA 2-15. Task 6.

7 Source: Schueler, T. 1997. Performance of Oil/Grit Separators in Removing Pollutants at Small Sites. Watershed Protection Techniques, 2(4): 539-542.

NA = not applicable. ND = not able to be determined from the available data.

4.4 Description of Proposed Best Management Practices

The potential BMPs considered for each of the candidate locations were selected and designed with the goal of improving the overall water quality of the stormwater discharging to the subject watersheds of the Peconic Estuary. The primary pollutants of concern for this area are nitrogen and bacteria. However, the effectiveness for structural BMPs to remove bacteria is limited; controlling the source of bacteria through public education is arguably the most effective method for bacteria reduction. Thus, the most appropriate and effective BMPs were selected for each retrofit location with an emphasis on nitrogen removal. If a particular BMP that has high nitrogen removal capability was not feasible due to site constraints, alternative BMPs were considered to provide removal for other types of stormwater pollutants such as total suspended solids (TSS), metals or hydrocarbons.

Based on the New York State Stormwater Management Design Manual (NYSSMDM), potential BMPs were sized to capture and treat 90% of the average annual stormwater runoff volume (Water Quality Volume, WQ_v). As a result, potential BMPs were sized to capture and treat the 1.2-inch storm event runoff from the contributing impervious areas to the maximum extent practicable. However, because this watershed management plan is proposing retrofits to the existing stormwater system, site constraints sometimes limited the available area for BMP construction, and the proposed BMPs at certain locations were, therefore, sized smaller than the WQ_v . Catch basin inserts were not considered due to their low removal rates for nitrogen and bacteria and high maintenance burdens. See Appendix A for more information on catch basin inserts.

All BMP recommendations occur under the conservative assumption that no other BMP is being implemented simultaneously. The pollutant removal efficiency estimated for each BMP is based on the assumption that each BMP is implemented independently of all others. However, it is recommended that a combination of BMPs be implemented jointly to address as large an area as possible within the study area to achieve a greater cumulative pollutant reduction at the outfall.

The BMPs proposed for the Hashamomuck Pond watershed include bioretention systems, micro-bioretention inlets, constructed wetlands, dry swales, grass channels, oil/grit separators, and sediment forebays. See Appendix C for a detailed description of each, including schematics, design guidelines, and maintenance requirements.

4.5 Retrofit Ranking System

Watershed planning recommendations generally come in two categories: (1) regulatory and programmatic actions or (2) restoration and protection projects. Regulatory and programmatic actions include changes to local codes, ordinances and programs that are derived from an audit of local government capacity to protect the watershed. Examples of regulatory actions include adopting a stream buffer ordinance, encouraging or dictating conservation-oriented design of land development projects, and establishing stringent

stormwater criteria. Hiring watershed coordinators, erosion and sediment control (ESC) inspectors, and executing a municipal street sweeping program are considered programmatic actions. Priority protection and restoration projects require implementation of important on-the-ground projects. Protection objectives generally involve land acquisition or applying conservation easements. Restoration projects include stream restoration, stormwater retrofits, and riparian reforestation, etc.

Since most communities will not be able to implement all the recommended actions or projects identified, it is important to go through a ranking process to identify priority sites. Not all recommendations are equal when it comes to implementation. Some recommendations, such as regulatory changes or land acquisition, may be more time sensitive than restoration projects, particularly in areas expecting significant development pressures in the short-term. Many large-scale stormwater retrofit projects require detailed planning and permitting which takes time, while buffer planting or trash cleanups are easy projects that can be completed in a few days.

Ranking candidate projects allows restoration sites to be compared together on a common basis to find the most cost-effective and feasible projects in the watershed. One of the key decisions in project ranking is whether to evaluate similar projects with the same basic purpose (e.g., stormwater retrofits vs. shoreline erosion control) or evaluate all different types of projects together; there are pros and cons to each approach. In general, it is probably preferable to assess all groups of projects at the same time, as long as the ranking factors can be arranged to compare the relative merits of each project. In this case, however, since the primary focus of this project is to evaluate stormwater management implementation, we compared stormwater retrofits in the ranking system.

Each selected site was ranked based on a Retrofit Ranking System. The proposed retrofit ranking system includes the following major factors:

1. Pollutant Removal Potential
 - Impervious area treated
 - Percent of water quality target volume treated
 - Pollutant load reduction
2. Project cost
3. Implementation feasibility based on ownership, wetland impact/permitting, access, maintenance, and utilities
4. Supplemental benefits such as habitat and public benefit

The ranking is based on a 100-point scoring system. The basic concept is to evaluate the relative merit of proposed retrofit sites by assigning points to a site based on its ability to meet various criteria under each of the four major factors cited above. Summing the assigned points for each of the factors gives an overall site score. Sites with the highest score represent the best overall candidates for implementation from a stormwater management vantage point.


The ranking system places an emphasis on (by weighting more heavily) the pollutant reduction potential. Specifically, 45% of the total points have been allocated to this category (impervious area treated, water quality volumes treated, and pollutant reduction). Another 45% of the points have been allocated to project cost and implementation. The cost estimates are based on a combination of compiled data in “Costs and Benefits of Stormwater BMPs” (Center for Watershed Protection, 1998) and best professional judgment based on experience. The exact costs will vary from these estimates based on final engineering design, permitting and contingencies. Design, permitting and contingency costs can be generally estimated at approximately 30-35% of the base construction costs (CWP, 1998). The remaining 10% of the points is divided between supplemental environmental and public benefits.

The rationale for the emphasis on the area and volume of water treated as well as the cost and feasibility of a project is two-fold. First, one goal of the retrofit approach is to manage a large percentage of the untreated impervious area runoff, in order to maximize water quality benefits to receiving waters. Therefore, those retrofit sites that are able to capture and effectively treat a larger area of impervious surface are deemed to be more important and valuable and thus assigned higher point values. Second, the feasibility of a proposed retrofit, in terms of both cost and implementation is important. Simply put, there are frequently “fatal flaws” for proposed retrofits in the form of capital costs, utility conflicts, private ownership, and access (to name a few). There is little point in proceeding with a retrofit design concept if there is a high probability that an existing constraint cannot be overcome. Therefore, proposed retrofits where these types of constraints are minimal or non-existent will be awarded higher point values. Specifics of the ranking are included in Table 4-2 and results are summarized in Section 4.6 below.

4.6 Investigated Sites and Selected BMP Descriptions

The following are descriptions of the seven selected BMP sites identified in the Hashamomuck Pond watershed. Figure 4-2 illustrates the locations of the potential BMP sites. Inventory forms, detailed sketches, maps, site photos, conceptual design plans, and calculations for each site are provided in Appendix D. BMPs were chosen to match site characteristics with recommended design criteria. The main characteristics that determine the type of BMP chosen include depth to groundwater, watershed area, available land space, and drainage system or other infrastructure constraints. The primary pollutant of concern for this study is nitrogen; however, at a selected site, if a particular BMP that has high nitrogen removal is not feasible due to site constraints, alternative BMPs were considered to provide removal for other types of stormwater pollutants.

Table 4-2: Hashamomuck Pond Retrofit Ranking Summary

Stormwater Retrofit Technical Feasibility	H-9	Site H-7	H-5	H-22A	H-18	H-22B	H-14
	Long Creek Dr. (Pond)	Long Creek Dr.	Laurel Ave.	Grove Rd. & Mill Creek Dr.	Colony Rd. & Bayview Ave.	Grove Rd.	Dons Way
1a. Impervious Area Treated =A _{site} /A _{total} *30	8.49	7.93	2.53	5.07	3.34	1.90	0.74
1b. % of Water Quality Volume Treated = WQV _{req} /WQV _{design} *7.5	7.50	1.56	7.50	2.50	7.50	7.50	7.50
1c. Pollutant Load Reduction Based on type of facility and ability to remove total nitrogen (eff. *7.5)	2.48	4.88	3.00	1.43	1.13	1.13	4.88
1. Pollutant Removal Potential (Total Possible Points 45)	18	14	13	9	12	11	13
2. Project Cost (Total Possible Points 15)	12	12	8	11	8	11	1
3a. Ownership Private Land = 0, Public Land = 15	15	10	10	10	10	5	5
3b. Wetland Impact / Permitting Yes = 0, No = 5	3	5	5	0	5	5	3
3b. Access Poor = 0, Good = 3	2	3	3	3	3	3	3
3c. Maintenance High = 0, Low = 3	1	2	2	1	1	1	2
3d. Utilities Major = 0, No Impacts = 4	2	2	4	4	2	2	2
3. Implementation (Total Possible Points 30)	23	22	24	18	21	16	15
4a. Habitat Provides = 5, Does Not Provide = 0	5	3	3	3	0	0	3
4d. Public Benefit Benefits another habitat = 1 Public/Education Program = 2 Constructed or Maintained by Volunteers = 1 No Permanent Loss of Recreational Features = 1	5	3	3	5	4	3	4
4. Supplemental Benefits (Total Possible Points 10)	10	6	6	8	4	3	7
Total Score (Maximum Score = 100)	64	54	51	46	45	40	36
	Highest Ranking 						Lowest Ranking

4.6.1 Site H-5 – End of Laurel Avenue

Site H-5 is located in subwatershed H-5 at the end of Laurel Avenue, abutting Long Creek which flows into Hashamomuck Pond. The drainage area is 0.71 acres, of which 63% is estimated to be impervious, mostly from Laurel Avenue. Untreated runoff from the pavement runs down Laurel Avenue into an existing eroded channel and discharges directly into Long Creek. This location is also a popular small boat launching area for fishermen heading to Hashamomuck Pond. There are signs of sediment build up along the roadway and at the entrance of the eroded channel.

The BMP for this site consists of pretreating the runoff with a series of grass channels and dry swales, and then treating the runoff with a bioretention facility, prior to outletting into Long Creek. The bioretention facility could be situated on an adjacent privately owned empty lot with an easement, or situated in the roadway, utilizing approximately 20 feet of the roadway from the existing end of roadway. Due to site constraints, the bioretention facility is sized to treat only half of the roadway. The runoff from the other half of the roadway will be treated in a designed dry swale prior to being discharged into Long Creek. The conceptual layout and all associated forms and site photos can be found in Appendix D-1.

Site H-5 ranked third overall. The major factors that contributed to this rank were the pollutant removal potential and implementation factors. Because this site is a popular boat launching area, this project would provide a great opportunity for public awareness and education on watershed management.

4.6.2 Site H-7 – Long Creek Drive

This site is located in subwatershed H-7, approximately 200 feet west of Laurel Avenue on Long Creek Drive. The contributing drainage area is approximately 6 acres, of which 23% of it is impervious. The site of the BMP is located at a natural low point in the roadway and there is an existing catch basin which overflows to an eroded gully and ultimately ends up in Long Creek. The existing drainage feature consists of a catch basin with an 8-inch overflow pipe and two 3-inch overflow pipes, all of which are clogged. There are obvious signs of sediment buildup in and around the catch basin, and severe gully erosion downslope.

The proposed BMP for this site is a bioretention facility with grass channels for pretreatment on both sides of the contributing roadway. The bioretention facility is proposed to be an on-line (primary collection) system due to the site constraint (existing large trees on the property). An extensive erosion control measure is required on the downstream edge of the bioretention to prevent washout of the facility during large storm events. The conceptual layout and all associated forms and site photos can be found in Appendix D-2.

This site was ranked second out of the seven potential sites in the watershed. It ranked highest in project cost, and second and third in pollutant removal potential and implementation, respectively. Since the BMP site is proposed to be located on a private

wooded lot, an easement would be required. If an easement cannot be obtained, this site would drop to a lower ranking.

4.6.3 Site H-9 – Bayview Avenue

This site is situated in subwatershed H-9 at an existing constructed pond for stormwater detention and treatment. The pond appears to be fed by both groundwater and by an intermittent stream during wet weather. The pond is outfitted with an outlet structure (stand pipe) that detains stormwater below a specified overflow elevation. During dry weather, stagnant water remains in the pond below the overflow elevation. This pond is the last in a series of ponds upstream of it, prior to discharging into Long Creek. The pond is situated on private property, adjacent to a residential home. However, during the site visit the property owner expressed interest in rejuvenating the pond and is willing to cooperate with any plans to upgrade the pond.

There is also a small section of roadway from which untreated runoff drains to a catch basin and discharged directly down stream of the pond. The proposed BMP concept for this site is to collect this untreated roadway runoff and pipe it to the proposed sediment forebay for pretreatment before discharging to the existing detention pond. Another aspect of the proposed BMP at this site is to provide pond restoration to improve the quality and aesthetics features of the pond. This would include: pruning back the trees over the pond to provide more sunlight, introducing more and a diverse selection of wetland plant species to the pond, creating a natural berm between the inlet (sediment forebay) and the existing outlet (stand pipe) to create a longer flow path for stormwater treatment (prevent short circuiting), replacing the existing outlet with a new outlet that incorporates a low flow orifice (to prevent the pond from becoming stagnant during the dry season), and installing a trash rack to prevent clogging of the outlet. The entire subwatershed area is approximately 6.6 acres that is collected and treated in a series of ponds (natural and constructed). The drainage area that contributes untreated runoff is approximately 0.23 acres of which 70% is impervious. The conceptual layout and all associated forms and site photos can be found in Appendix D-3.

This site ranked first overall out of the seven selected sites, with the highest individual ranking for project cost (highest cost per acre of drainage area treated), pollutant removal, and supplemental benefits. This site would provide an optimal area for public education in the neighborhood and with the cooperation of the property owner, implementation is feasible.

4.6.4 Site H-14 – Dons Way

Site H-14 is a private cottage community overlooking Hashamomuck Pond in subwatershed H-14. There doesn't appear to be a formal drainage system on site. Instead, runoff probably ponds in low lying areas and drains off the roadway to Hashamomuck Pond. The paved roadway servicing this community is in poor condition and would need to be upgraded for the proposed BMP concept. The contributing drainage area for treatment is 0.13 acres of which all is from the paved roadway.

The proposed BMP concept for this site are grass channels on both sides of the roadway (newly paved with proper cross slopes) leading to a bioretention system at the end of the roadway. The conceptual layout and all associated forms and site photos can be found in Appendix D-4. This site ranked the lowest of all sites with the lowest ranking given to project cost and implementation. The site is a privately owned community, with little incentive for stormwater improvements. The small drainage and treatment area also detract from its ranking.

4.6.5 Site H-18 – Intersection of Colony Road & Bayview Avenue

Site H-18 is located in subwatershed H-18. At this site there is an existing infiltration pit with a 3'x3' grate on the northeast corner of Colony Road and Bayview Avenue. Currently, stormwater runoff flows down the roadway from Bayview Ave. and Colony Rd. and drains to the existing infiltration pit. The drainage area that contributes to this existing drainage structure is approximately 2.27 acres of which 26 % is impervious.

The proposed BMP stormwater concept includes a series of dry swales on both sides of Bayview Avenue, which will drain to an oil/grit separator prior to discharging into the existing infiltration pit. The conceptual layout and all associated forms and site photos can be found in Appendix D-5. This site ranked fifth overall due to the low supplemental benefits and overall project cost (higher) relative to the other sites.

4.6.6 Site H-22A – Intersection of Grove Road & Mill Creek Drive

This site is located in subwatershed H-22 and has an existing drainage network that outlets into an existing vegetated channel, which is tidally influenced. There are two catch basins in the vicinity, one directly connected to the outfall and the other across the roadway from the outfall. The drainage area contributing to these two catch basins is approximately 4.48 acres of which 20% is impervious. In addition to the above drainage area, the existing outlet maybe connected to a larger system upstream from this subwatershed. It is unclear what area the contributing drainage network is coming from.

The proposed BMP for this site has two components. One is a micro-bio inlet at the corner of Mill Creek Drive and Grove Road to treat the runoff from the roadways prior to discharge into the existing vegetated swale. The other BMP is a sediment forebay with stone check dams in the existing vegetated channel. This will help reduce the amount of sediment entering Hashamomuck Pond. The conceptual layout and all associated forms and site photos can be found in Appendix D-6.

The site was ranked fourth overall, with the lowest pollutant removal potential of all the sites but high in supplemental benefits. This area is adjacent to a public boat launch, which provides great public education opportunities for the Hashamomuck Pond watershed.

4.6.7 Site H-22B – Grove Road

Site H-22B is located in subwatershed H-22. This site is situated on Grove Road, east of Site H-22A. This area reportedly experiences frequent flooding during storm events.

There are new infiltrating catch basins located at this site which replaced failed infiltrating catch basins. The drainage area contributing to this BMP site is approximately 1.34 acres of which 25 % is impervious.

The proposed BMP concept for this site includes a series of dry swales along both sides of the roadway to pretreat the stormwater runoff prior to overflowing into a catch basin. The existing infiltrating catch basin should be removed and replaced with deep sump catch basins. The overflow from the catch basins will be directed to an oil/grit separator prior to being discharged to a new outlet into Hashamomuck Pond. The proposed overflow mechanism will help alleviate flooding to adjacent properties during large storm events. The conceptual layout and all associated forms and site photos can be found in Appendix D-7.

The largest hurdle at this site is to obtain a drainage easement between homes to install the new outfall into Hashamomuck Pond. This site ranked sixth overall, due to the likely implementation problems and low supplemental benefit potential.

4.7 Unified Subwatershed and Site Reconnaissance

The Unified Subwatershed and Site Reconnaissance (USSR) procedure was created by the Center for Watershed Protection (2004). The USSR is a rapid field survey that helps identify potential pollution sources and restoration opportunities in the upland areas of a watershed. It is a fast and economical approach to characterizing pollutant contributions over a wide range of urban conditions and identifying stakeholders that can help with the restoration planning process. By performing the USSR, water managers can gain a greater understanding of the issues facing a watershed. The USSR is comprised of four major components: Neighborhood Source Assessments, Hotspot Site Investigations, Pervious Area Assessments, and Streets and Storm Drains. A separate field form is used for each assessment component.

The USSR approach was used in the Hashamomuck Pond watershed as a part of the watershed assessment field reconnaissance. The data collected on the upland areas of the watershed helped identify potential pollution sources that were not apparent from GIS data analyses, and in general, helped to characterize the watershed as a whole. This data framework will help target effective homeowner and commercial education programs, as well as future restoration projects. In addition, this information forms a baseline to which future assessments can be compared in order to determine rate of change in the watershed (i.e., where pollution problems have increased over time or where education programs have been successful in modifying certain behaviors).

In general, the neighborhoods in the watershed have medium to high lawn management characteristics, meaning that they are mostly likely a significant source of nitrogen. A targeted public education campaign on low-impact lawn care in the watershed is recommended, as well as on-site retrofits such as rain gardens. There were no hotspots identified, and one pervious area was assessed where reforestation and/or public

education on pet waste is recommended. The leaching pits investigated were in mostly clogged and in need of maintenance. Recommended actions include a street sweeping program and catch basin stenciling. More information on the USSR results is found in the following sections, which summarize each component of the USSR and describe the specific sites assessed in the Hashamomuck Pond watershed. See the Field Inventory Locations Map (Figure 4-2) for the locations of each assessment.

4.7.1 Neighborhood Source Assessment (NSA)

The NSA is used to evaluate pollutant-generating behaviors in individual neighborhoods and identify potential restoration opportunities. Field forms are completed on topics including neighborhood characterization; yard and lawn conditions; driveways, sidewalks, and curbs; rooftops; common areas; and initial neighborhood assessment and recommendations. Three lots are chosen at random to provide an average sample for the neighborhood. At the end of the assessment, a pollution severity index is assigned, and the overall restoration potential is assessed for each neighborhood. Three neighborhoods were analyzed in the Hashamomuck Pond vicinity (Figure 4-2) and are summarized below. Please see Appendix E for the completed NSA field forms and site photos.

NSA H-4

NSA H-4 is located in watershed H-4 along Long Creek Drive. The neighborhood is relatively new (approximately 4 years old) and is comprised of greater than 1 acre lots of single-family homes with garages and full basements. The neighborhood has no sidewalks and no common open space. There is a mixture of lots with low percentage of grass cover (20-25% of lot) and high grass cover (70% of lot). All of the lots exhibit high turf and landscape management practices. There are few mature trees in this neighborhood. Several sprinklers were observed running in the middle of a hot day, with some overlap onto driveways and the road. The neighborhood's stormwater is directed to the roadway, where it then drains informally into the shoulder areas. There was only one leaching catch basin observed in the entire neighborhood.

The pollution severity index for NSA H-4 was high, while the restoration opportunity index was moderate. Recommended actions include better lawn/landscaping practices including rain gardens at the end of downspouts, education on better lawn/landscaping practice, and water quality swales.

NSA H-9

NSA H-9 is directly adjacent to NSA H-4 however the neighborhood is very different in characteristics. This neighborhood is over 30 years old with mature trees lining the street. The lot size averages around half an acre, and all of the houses have garages and full basements. Approximately 60% of the neighborhood has medium turf and landscape management practices, with the remainder of the neighborhood equally divided between high and low turf and landscape management practices. There are no sidewalks, curbs, or

gutters present. There is, however, an existing storm drainage system, consisting of leaching catch basins that were predominantly clogged and required maintenance.

The initial assessment of this neighborhood shows a high pollution severity index and a moderate restoration opportunity index. Recommended actions for this site are, lawn care education, street sweeping, catch basin cleanout, and water quality swales along the road for pretreatment.

NSA H-14

This neighborhood represents a typical seasonal cottage community. Terrace Cottage Colony is located off of Don's Way and comprised of detached cottages that are situated on lots less than a quarter acre in size. The estimated age of this area is over 40 years old. There is minimal landscaping, and there appears to be low turf management. 75% of the neighborhood is under tree canopy. The main driveway into this community is a dirt road with no sidewalks, curbs, or gutters.

The pollution severity index and restoration opportunity index for this site is moderate.

4.7.2 Hotspot Site Investigation (HSI)

Stormwater hotspots are land uses or activities that produce runoff with relatively high concentrations of pollutants. There are two types of hotspots: those regulated by Federal or State law and those that are unregulated. The following land uses and activities are considered stormwater hotspots as listed in the New York State Stormwater Management Design Manual (2003):

- Vehicle salvage yards and recycling facilities*
 - Vehicle fueling stations
 - Vehicle service and maintenance facilities
 - Vehicle and equipment cleaning facilities*
 - Fleet storage areas (bus, truck, etc.)*
 - Industrial sites*
 - Marinas (service and maintenance)*
 - Outdoor liquid container storage
 - Outdoor loading/unloading facilities
 - Public works storage areas
 - Facilities that generate or store hazardous materials*
 - Commercial container nurseries
 - Other land uses and activities as designated by an appropriate review authority
- * indicates that the land use/activity is currently regulated

The HSI creates an inventory of storm water hotspots, including regulated and non-regulated sites, and assesses the severity of each hotspot with regard to its potential to generate storm water runoff or illicit discharges. The HSI is also used to propose appropriate follow-up actions for each hotspot, including recommendation for rapid enforcement and the feasibility of onsite stormwater retrofits. Field forms are completed

on topics including site data and basic classification, vehicle operations, outdoor materials, waste management, physical plant, turf/landscaping areas, stormwater infrastructure, and initial hotspot status-index results. Hotspot status for each site is broken down into four categories: not a hotspot, potential hotspot, confirmed hotspot, and severe hotspot.

There were no hotspot sites identified in the Hashamomuck Pond watershed.

4.7.3 Pervious Area Assessment (PAA)

The PAA evaluates the existing condition of natural area remnants and open spaces, identifies their potential management needs, and also helps to determine the reforestation opportunities for large pervious areas. Field forms are completed on topics including parcel description, current vegetative cover, impacts, and initial recommendations.

One pervious area was assessed in the Hashamomuck Pond watershed (Figure 4.2) and is summarized below. Please see Appendix E for the completed PAA field forms and site photos.

PAA H-9

The pervious area is located on Yennecott Drive. It is a large open park area across from an existing pond. The park area is surrounding by natural woods and appears to have been cleared for the purpose of a park. The site is 80% turf cover, 5% herbaceous cover, 5% tree cover, and 10% shrub cover. The area appears to be mowed frequently. The site receives full sun, and evidence for significant waterfowl use was observed. The pond appeared heavily eutrophied and drains to an intermittent stream that flows to BMP site H-9.

This site could be a good candidate for natural regeneration and may be reforested with minimal site preparation. However, the site appears to get significant use for dog walking, and it is unclear if the community would prefer the existing open park area in comparison to less-managed open space. At a minimum, education signage concerning dog waste and stormwater should be considered at this location.

4.7.4 Streets and Storm Drains (SSD)

The SSD estimates the severity of pollutant buildup on roads and within storm drain systems and rates the practicability of four municipal maintenance strategies (street sweeping, storm drain stenciling, catch basin cleanouts, and parking lot retrofits). SSD assessments are usually associated with either NSA or HSI sites. Field forms are completed on topics including location, street conditions, storm drain inlets and catch basins, non-residential parking lots, and municipal pollutant reduction strategies. One to two catch basins are analyzed per NSA/HSI.

One storm drain was assessed in the Hashamomuck Pond watershed (Figure 4-2) and is summarized below. Please see Appendix E for the completed SSD field form and site photos.

SSD H-4

This neighborhood had only one visible catch basin for the entire area. It is unclear how or where the runoff from this site is directed. This storm drain is a leaching catch basin on the intersection of Long Creek Drive and Park Avenue. It appears to be in relatively good condition with no debris or sediments at the inlet. This location is an optimal site for street sweeping and catch basin clean out if necessary.

SSD H-9

A storm drain associated with neighborhood source area NSA-H-9 was assessed. This storm drain is comprised of a pair of catch basins located on Yennecott Drive and is used to drain the roadway runoff as well as convey the existing stream across the street to the pond.

Most catch basins in this neighborhood are typically leaching catch basins. They all appear to need maintenance. There are several highly feasible pollution prevention strategies for this area, including street sweeping, storm drain stenciling and catch basin cleanouts.

5.0 HABITAT PROTECTION OPPORTUNITIES

HW identified and observed conditions at three separate areas of undeveloped land within the Hashamomuck Pond watershed and evaluated these areas for existing habitat attributes. These three areas, which are within four of the Hashamomuck Pond subwatersheds, are comprised of a total of seven individual parcels of land. A general description of each habitat with respect to observed land and water features and current status according to the different mapping resources that HW utilized as part of the assessment is provided below. The information collected enabled us to provide a suggested ranking of these parcels and provide a rationale for acquisition priority. Figure 5-1 shows the location of the potential habitat site investigated, and Table 5-1 provides a summary of site observations and information collected from conservation mapping. Each area is identified by parcel ID number(s) from the Suffolk County GIS parcel layer and grouped by subwatershed.

Parcels 4656 and 4536 (Subwatersheds H4 and H21)

These adjoining parcels are both mapped as Priority Vacant Land and are within the PEP Critical Natural Resource Area boundary. Both properties support mature, hardwood-forested habitat, abutting the shoreline of the coastal embayment. Abundant pond shoreline habitat is present including salt marsh habitat. A pair of eastern box turtles (*Terrepenne c. carolina*) was found on the northern parcel. This terrestrial reptile species likely utilize much of the upland habitat in this area. There are two relatively small isolated wetlands located on the southern parcel, which likely provide habitat for seasonal pool-breeding amphibians. The forested upland areas surrounding these pools provide non-breeding habitat for amphibians and reptiles potentially using this pool.

Invasive plants were not observed in any significant abundance. There is one residence on an adjacent parcel within subwatershed H3 and identified as Low Density Residential. Some pruning of vegetation has occurred within the understory on the northern parcel to afford the abutting resident a better view of the embayment.

These two contiguous parcels are ranked higher than most other assessed parcels because they are adjacent to open water, mature hardwood forest, salt marsh, and other habitat types are preserved, relatively undisturbed conditions within these habitats are maintained, there is a lack of invasive plant communities, and there is little nearby residential development. Potential for residential development on these parcels is relatively high due primarily to their desirable locations.

Parcels 4536 and 4656 are subsets of a 5.0 acre and a 5.5 acre parcel, respectively. Both parcels are highlighted as protection priorities in the PEP Critical Lands Protection Plan. Parcel 4536 met two PEP CLPP environmental criteria as well as at least one priority criterion and was determined to be vacant. Parcel 4656 met three environmental criteria as well as at least one priority criterion and was determined to be vacant.

TABLE 5-1 PARCEL SUMMARY TABLE – HASHAMOMUCK POND WATERSHED

							Land Use, Location, and Conservation Information for Parcel(s) (Mapping Source: The Nature Conservancy - Long Island)														
Parcel(s) Identifier	Subwatershed Identifier(s)	Relative Size of Entire Parcel(s)	Approx. % of Parcel(s) Area within Watershed	Abuts Relatively Dense or is Isolated by Residential Development	Abuts Significantly Large Parcel of Protected Land	Directly Abuts Water	Vacant Land	Developed and Agricultural Land	Developed but Subdivisible Land	Priority Vacant Land	Priority Developed, Subdivisible Land	Parcel is Within PEP CNR Boundary	CPF Parcel(s)	All or Majority of Parcel is Within 1000' Shoreline Buffer	Habitat Types Present within Watershed Boundary	Approximate % of Wetland Habitat within Subwatershed	Approximate % of Upland Habitat within Subwatershed	Significant Amounts of Invasive Plant Species	Development Potential w/in Watershed Portion	In-watershed Rank based upon Observed Habitat Attributes	Comments (more comprehensive discussion of each assessed area is attached)
4656 4536	H4 / H21	large	70			●	●			●		●	●	●	TFo, SM, SL, CBank, PVPs	10	90		high	1	The presence of Eastern box turtles was documented. Potential vernal pools are present.
15584 5642 15594	H19	large	40	●	●	●				●	●	●	●	●	SM, PEM, PSS, TFo, Agri, Stm, Phrag-PEM	50	50		low	2	The amount and locations of wetland habitats limit development potential in near-water portions of parcels.
5178 5140	H9	very large	90	●						●		●	●		TSS, PSS, TFo, OMdw, PVPs	20	80	●	high	3	Both parcels are traversed by a utility corridor.

Key to abbreviations: PFo (Palustrine Forested), PSS (Palustrine Scrub-shrub), PEM (Palustrine Emergent Marsh), Phrag-PEM (*Phragmites*-dominant emergent marsh), TFo (Terrestrial Forested), TSS (Terrestrial Scrub-Shrub), OMdw (Open Meadow), SM (Salt Marsh), SL (Shoreline), PVP (Potential Vernal Pool), Agri (Areas actively managed for agricultural use), Stm (Stream), CBank (Coastal Embankment)

Parcels 15584, 5642, and 15594 (Subwatershed H19)

These contiguous parcels are identified as either Priority Vacant (Parcel 15584), Priority Developed but Subdivisible (Parcel 5642 – The Arshamomoaque Stables), or Developed and Agricultural (Parcel 15594). Existing residential development exists to the west, protected land abuts to the southeast, Colony Road is to the north, and Hashamomuck Pond abuts to the south. The southern half of each parcel is within the subwatershed. Field observations occurred in the southernmost portions of parcels 15584 and 5642, which are the areas undisturbed by agricultural-related activities. These areas support wetland habitat and contain primarily salt and brackish marsh that abuts forested and shrub-dominant upland habitat. *Phragmites*-dominant marsh is present in certain wetland areas.

These parcels rank higher than most other assessed parcels because they are adjacent to open water and to protected land, there are a number of quality habitat types, and there are relatively undisturbed conditions within these habitats. Because the upland areas within the watershed, particularly near the water, will have limited development potential, due to their proximity to existing wetland habitat areas. The acquisition priority should be lower than other parcels within the watershed that have a higher development potential.

Parcels 15584 and 5642 are both subsets of a 14.4-acre and a 13.8-acre parcel, respectively. Both parcels are highlighted as protection priorities in the PEP Critical Lands Protection Plan. Parcel 15584 met three PEP CLPP environmental criteria as well as at least one priority criterion and was determined to be vacant. Parcel 5642 met three environmental criteria as well as at least one priority criterion and was determined to be developed but further subdividable. Priority criteria were used in the PEP Critical Lands Protection Plan to highlight specific parcels for some form of protection.

Parcels 5178 and 5140 (Subwatershed H9)

Most of these contiguous parcels are within subwatershed H9, but do not abut Hashamomuck Pond, are mapped as vacant lands and Community Preservation Fund Parcels, and are within the PEP Critical Natural Resource Area boundary. The northern portions of both parcels are just within the 1,000' Shoreline Buffer Boundary. They directly abut public roads and contain a significantly large area of densely vegetated and contiguous shrub-dominant upland habitat and they have a relatively high potential for subdivision and future residential development. The western parcel contains a relatively large buttonbush (*Cephalanthus occidentalis*) and swamp loosestrife (*Decodon verticillatus*) shrub swamp in its southwestern corner. Invasive plants including olive (*Elaeagnus* sp.), multiflora rose (*Rosa multiflora*), and Oriental bittersweet (*Celastrus orbiculatus*) were observed in abundance in the shrub-dominant uplands.

The in-watershed portions of these two contiguous parcels rank higher than other parcels because of their relatively large size and the presence of numerous habitat/cover types,

including the expansive buttonbush/swamp loosestrife swamp, but lower than other parcels primarily because the parcels are separated from the water, they abut dense residential development, and there was an abundance of invasive/nuisance plant species that comprise much of the upland habitat.

Parcels 5178 and 5140 are subsets of a 28.1-acre and an 11.4-acre parcel, respectively. Both parcels are highlighted as protection priorities in the PEP Critical Lands Protection Plan. Parcel 5140 met two PEP CLPP environmental criteria as well as at least one priority criterion and was determined to be vacant. Parcel 5178 met three environmental criteria as well as at least one priority criterion and was determined to be vacant.

6.0 REFERENCES

- Center for Watershed Protection (CWP) 1997. "National Pollutant removal Performance Database for Stormwater Best Management Practices". Prepared for the Chesapeake Research Consortium.
- Center for Watershed Protection (CWP) 1998. Cost and Benefits of Storm Water BMPs. Final Report. Prepared for Parson Engineering Science under contract with US. EPA (Contract No. 68-C6-0001, WA 2-15). U.S. EPA, Washington, DC. 60 pp.
- Center for Watershed Protection. 2003. NYSDEC Stormwater Design Manual.
- Center for Watershed Protection. 2004. Unified Subwatershed and Site Reconnaissance: A User's Manual. Urban Subwatershed Restoration Manual No. 11.
- Claytor and Schueler 1996. Design of Stormwater Filtering Systems. for the Chesapeake Research Consortium. Center for Watershed Protection, Ellicott City, Maryland. 179 pp.
- Horsley and Witten, Inc., 2003, Peconic estuary Stormwater Assessment and Planning Tool.
- Peconic Estuary Program, 2001, Comprehensive Conservation and Management Plan.
- Peconic Estuary Program, 2004, Critical Lands Protection Plan.
- Schueler, T. 1997. Comparative Removal Capability of Urban BMPs: A Reanalysis. Watershed Protection Techniques, 2(4): 515-520.
- Southeastern Wisconsin Regional Planning Commission (SWRPC). 1991. Costs of Urban Nonpoint Source Water Pollution Control Measures, Waukesha, WI.
- U.S. EPA. 1983. Results of the Nationwide Urban Runoff Program, Vol. 1, Final report. NTIS PB84-185552.
- Vermont Agency of Natural Resources. April 2002. The Vermont Stormwater Management Manual. Waterbury, VT.

APPENDIX A

Catch Basin Insert – Performance Data

CATCH BASIN INSERT – PERFORMANCE DATA

Catch basin inserts are attractive retrofit BMPs to some communities due to their relatively easy and low-cost installation. However, in the end, their cost effectiveness is determined by their water quality benefit and the maintenance frequency required. Studies have demonstrated that for many applications, frequent maintenance is necessary to prevent clogging and stormwater flows bypassing the BMP, as well as the resuspension of previously captured material. In addition, the water quality treatment provided is variable, and typically, much lower than many other BMPs. The table below shows removal data from three different studies on a variety of catch basin inserts available on the market. Total suspended solids (TSS) removal varies from 3-82%, with generally lower removals of nutrients. Bacteria removals were not tested as a part of these studies.

Selection of inserts should take into account many factors, such as: predicted flow rates, pollutants of concern, predicted pollutant concentrations, sediment particle size distribution, maintenance requirements, maintenance capability, and the current design of the inserts. Catch basin inserts are not practical for large drainage areas or for areas with high levels of organic debris. Public education and outreach regarding illegal dumping into storm drains could decrease maintenance requirements for these BMPs and help avoid clogging and any subsequent flooding. In addition, regular scheduled inspections and maintenance could result in more effective removals.

Technology	Pollutant Removals (%)					
	TSS	Nitrogen			Total Phosphorus	Bacteria
		TKN	Nitrate	Nitrite		
StormFilter® with Perlite Filter Media ¹ Stormwater Mangement, Inc.	50	24	-13	36	50	ND
Hydro-Kleen™ Filtration System ¹ Hydro Compliance Management, Inc.	46-75	0*	0*	0*	0*	ND
Vortechs® System, Model 1000 ¹ Vortechncis, Inc.	35	ND	ND	ND	21	ND
CrystalStream™ Water Quality Vault Model 1056 ¹ Practical Best Management of Georgia, Inc.	21	13	25	50**	40	ND
Arkal Pressurized Stormwater Filtration System ¹ Zeta Technology, Inc.	82	26	-76	-76	55	ND
AbTech Ultra Urban Filter ² AbTech Industries	45	ND	ND	ND	ND	ND
AquaShield™ ² AquaShield, Inc.	10	ND	ND	ND	ND	ND
DrainPac™ ² GeoMarine, Inc.	22	ND	ND	ND	ND	ND
HydroCartridge™ ² PacTec, Inc.	40	ND	ND	ND	ND	ND
StreamGuard™ ³ Bowhead Manufacturing Co. LLC	3	ND	ND	ND	ND	ND
FossilFilter™ ³ KriStar Enterprises, Inc.	14	ND	ND	ND	ND	ND

ND = No data

* Study indicated that technology was “ineffective” at removal of these constituents

**Study indicated that removal rate may not be accurate due to low influent concentrations

¹ US EPA - Environmental Technology Verification Program for Stormwater Source-Area Treatment Devices
<http://www.epa.gov/etv/verifications/vcenter9-9.html> Studies completed between 2003-2005.

² Civil Engineering Research Foundation’s Verification Report of the Low-cost Stormwater BMP Study
http://www.mackblackwell.org/research/finals/arc2018/MBTC%202018.htm#_Toc53367774

³ CalTrans BMP Retrofit Pilot Program, Chapter 11 Drain Inlet Inserts, January 2004.
<http://www.dot.ca.gov/hq/env/stormwater/>

APPENDIX B

Watershed Assessment Guide

Watershed Assessment Guide:

A Handbook for Water Managers in the Peconic Estuary Region

1.0 Introduction

The Peconic Estuary is located on the east end of Long Island, New York. This ecosystem has been designated by U.S. Environmental Protection Agency as an "Estuary of National Significance." Development pressures in an area typically characterized by open space and agriculture are forcing water managers to plan wisely now in order to preserve and enhance the water quality and wildlife habitat of the estuary.

In order to plan effectively a watershed assessments should be performed. A watershed assessment addresses pollutant loading sources and restoration opportunities within subject watersheds. The assessment has four main elements: data preparation, field reconnaissance, restoration prioritization, and watershed plan development.

2.0 Data Preparation

Thorough data preparation and review of existing conditions can save time out in the field later on. Watershed managers should gather as much information as possible about the area of concern. Geographic Information System (GIS) data are extremely helpful in a watershed assessment. GIS data layers and water quality data are available for the Peconic Estuary region through the development of the regional stormwater project¹. Available data include coastlines boundaries, topographical contours, critical habitats, existing land use, water quality parameters monitored through the Peconic Estuary Program (PEP), shellfish habitat and closings, and field-identified stormwater discharge locations. In addition to these data, zoning maps, ordinances and regulations for each town within a study area; aerial photography; analysis of aerial photos by US Fish and Wildlife Service (USFWS) for eelgrass beds, macroalgae and shoreline hardening extent; population data; information on swimming beach water quality and closures; number of boats utilizing the embayment from the Vessels Waste No Discharge Zone application to the US Environmental Protection Agency (USEPA); and other studies related to the water quality, hydrology, habitat, flushing, etc., specific to the particular embayment may also be collected and reviewed.

Based on the above data collection effort, drainage basins (watersheds) can be identified for the receiving body of concern, as well as discreet drainage areas (subwatersheds) within the drainage basins. Sites for further investigations can be pre-selected based on outlet locations, available open space (space for retrofits), public ownership, and/or undisturbed lands (i.e., natural wooded land). Once all sites have been pre-selected, a field reconnaissance can be initiated. A field reconnaissance serves many purposes such as verifying existing condition information,

¹Peconic Estuary Stormwater Assessment and Planning Tool. Horsley Witten Group, October 2003. Prepared for Peconic Estuary Program.

conducting formal investigations for stormwater retrofits, potential pollution sources and restoration opportunities in upland areas, and inventorying potential habitat protection areas. Depending on the breadth of the watershed assessment scope, all or some of these investigations can be included in the field reconnaissance.

Prior to any field work, reconnaissance teams should be prepared with the right tools, forms and maps necessary for the assessment. A checklist should be prepared. **Table 1** includes a sample checklist used in a previous field reconnaissance.

Table 1. Example of Field Reconnaissance Checklist

Watershed Stormwater Retrofit and Upland Non-point Source Assessment

Equipment/Data Needs

- ☐ Watershed Maps (Aerial photography, soils, land use, street maps, USGS quads, habitat maps)
- ☐ 1 digital camera per team
- ☐ 1 calculator per team
- ☐ Field forms, clipboard (waterproof, if possible), pencils (waterproof, if possible)
- ☐ 1 pry bar per team (to pop Manhole/Catch Basin rims)
- ☐ 1 screwdriver per team (to help pop Manhole/Catch Basin rims and assess soil compaction)
- ☐ 1 flashlight per team
- ☐ 1 pair of binoculars per team
- ☐ 1 tape measure per team (25 ft ok, 100 ft, if available)
- ☐ Safety equipment (first aid kit, sun screen, insect repellent)
- ☐ Snacks, water bottle
- ☐ Rain gear (plus umbrella for covering camera/field forms)
- ☐ Authorization letter from client (describes nature of project for potential access to properties)
- ☐ Parking display cards (for dashboards of vehicles)
- ☐ 1 pair of water boots per team (for shallow water access)
- ☐ Cell phones with team member #s (plus client, other local government contacts)
- ☐ Personal items (appropriate clothing, sunglasses, hat, gloves, etc)

3.0 Field Reconnaissance

Field reconnaissance is a must when performing a watershed assessment. The data gathered in the office must be field-verified. For example, there may be physical constraints at a site that appeared promising for restoration on GIS, but the data were either outdated or incomplete. Only out in the field can a manager get the full picture of an area. In addition, local residents

met in the field may be able to provide additional information about a site that could sway the ranking of a project.

3.1 Stormwater Retrofit Reconnaissance Inventory

The goal of a stormwater outfall and retrofit inventory is to determine potential stormwater best management practice (BMP) retrofits in a watershed to better manage and treat stormwater runoff before it enters the receiving waters. Potential locations for the installation of stormwater BMPs should be pre-selected based on land use, parcel ownership (publicly-owned land simplifies implementation), potential conflicts with existing utilities, effective stormwater capture area, and pollutant source locations. Examples of BMPs include the following: sediment forebays, water quality swales (dry or wet), bioretention systems, constructed wetlands, infiltration basins, etc. A field crew shall visit and evaluate each site and fill out separate field forms for each potential BMP retrofit. A sample field form is included in the attachment.

Data collected in the field and compiled afterwards should include the inventory forms, detailed sketches of the site, several site photos, conceptual design plans, and calculations for each site. BMPs should be chosen based on site characteristics that match BMP design criteria. Some characteristics that determine the type of BMP chosen include depth to groundwater, watershed area, available land space, and drainage system or other infrastructure constraints. The pollutants of concern for the study may vary by watershed and could include nitrogen, phosphorus, total suspended solids (TSS), bacteria, metals or hydrocarbons.

The results of this assessment are then used to recommend site specific stormwater management implementation projects in key locations throughout the watersheds.

3.2 Unified Subwatershed and Site Reconnaissance

The Unified Subwatershed and Site Reconnaissance (USSR) procedure was prepared by the Center for Watershed Protection (2004). The USSR is a rapid field survey that helps identify potential pollution sources and restoration opportunities in the upland areas of a watershed. It is a fast and economical approach to characterizing pollutant contributions over a wide range of urban conditions and identifying stakeholders that can help with the restoration planning process. By performing the USSR, water managers can gain a greater understanding of the issues facing a watershed. The data collected on the upland areas of a watershed help to identify potential pollution sources that are not apparent from GIS data analyses, and in general, to characterize the watershed as a whole. This data framework will help managers target effective homeowner and commercial education programs, as well as future restoration projects. In addition, this information forms a baseline to which future assessments can be compared in order to determine rate of change in the watershed (i.e., where pollution problems have increased over time or where education programs have been successful in modifying certain behaviors).

The USSR is comprised of four major components: Neighborhood Source Assessments, Hotspot Site Investigations, Pervious Area Assessments, and Streets and Storm Drains. Separate field forms are used for each assessment component, which are included in the attachment.

Neighborhood Source Assessment (NSA)

The NSA is used to evaluate pollutant-generating behaviors in individual neighborhoods and identify potential restoration opportunities. Field forms are completed on topics including neighborhood characterization; yard and lawn conditions; driveways, sidewalks, and curbs; rooftops; common areas; and initial neighborhood assessment and recommendations. Three lots are chosen at random to provide an average sample for the neighborhood. At the end of the assessment, a pollution severity index is assigned, and the overall restoration potential is assessed for each neighborhood.

Hotspot Site Investigation (HSI)

Stormwater hotspots are land uses or activities that produce higher concentrations of pollutants. There are two types of hotspots, those regulated by federal or state law and those that are unregulated. The following land uses and activities are considered stormwater hotspots as listed in the New York State Stormwater Management Design Manual (2003):

- Vehicle salvage yards and recycling facilities*
- Vehicle fueling stations
- Vehicle service and maintenance facilities
- Vehicle and equipment cleaning facilities*
- Fleet storage areas (bus, truck, etc.)*
- Industrial sites*
- Marinas (service and maintenance)*
- Outdoor liquid container storage
- Outdoor loading/unloading facilities
- Public works storage areas
- Facilities that generate or store hazardous materials*
- Commercial container nurseries
- Other land uses and activities as designated by an appropriate review authority

* indicates that the land use/activity is currently regulated

The HSI creates an inventory of storm water hotspots, including regulated and non-regulated sites, and assesses the severity of each hotspot with regard to its potential to generate storm water runoff or illicit discharges. The HSI is also used to propose appropriate follow-up actions for each hotspot, including recommendation for rapid enforcement and the feasibility of onsite stormwater retrofits. Field forms are completed on topics including site data and basic classification, vehicle operations, outdoor materials, waste management, physical plant, turf/landscaping areas, stormwater infrastructure, and initial hotspot status-index results. Hotspot status for each site is broken down into four categories: not a hotspot, potential hotspot, confirmed hotspot, and severe hotspot.

Pervious Area Assessment (PAA)

The PAA evaluates the existing condition of natural area remnants and open spaces, identify their potential management needs, and also helps to determine the reforestation opportunities for large pervious areas. Field forms are completed on topics including parcel description, current vegetative cover, impacts, and initial recommendations.

Streets and Storm Drains (SSD)

The SSD estimates the severity of pollutant buildup on roads and within storm drain systems and rates the practicability of four municipal maintenance strategies. SSD assessments are usually associated with either NSA or HSI sites. Field forms are completed on topics including location, street conditions, storm drain inlets and catch basins, non-residential parking lots, and municipal pollutant reduction strategies.

The results of these investigations are used to target specific watershed actions that may include public education, regulatory code reform, and/or targeted inspections.

3.3 Habitat Reconnaissance Inventory

Areas should be selected for on-site review if they are undeveloped, primarily forested, appear to contain a significant amount of upland with residential development potential, and are not mapped as “Protected Land” according to existing information provided by The Nature Conservancy (TNC) and/or Suffolk County. These areas can be either stand-alone properties or areas comprised of a number of abutting properties. Field assessments should generally only occur within the portions that are mapped within the subwatershed boundary of concern. In certain instances, you may discover that development is underway on selected parcels; and therefore, an on-site assessment of habitat features should not be performed. In addition, if an area is posted with “No Trespassing” signs, the area should not be entered for assessment without prior permission.

The field data should constitute the answers to habitat assessment questions and other observations. Some attributes to consider for assessing watershed habitat include the following:

1) Habitat complexity

- number of plant layers,
- condition of plant layer coverage,
- spatial pattern of shrubs and/or trees,
- number of cover types in each plant layer,
- ratio of cover types,
- degree of cover type interspersions,
- the presence of undesirable species,
- percent open water,
- degree of vegetation/water interspersions,
- shape of the wetland/upland edge, and
- wildlife attractors

2) Features which reduce habitat value

- disturbance of wildlife habitat
- observable contamination

In addition to the above, other habitat attributes to consider include:

- the proximity of the subject area to residential or commercial development;

- the proximity of the subject area to protected land;
- evidence of land management activities (such as mowing and debris disposal); and
- wildlife species or wildlife habitat use evidence encountered.

4.0 Prioritizing Restoration Options

Watershed recommendations generally come in two categories: (1) regulatory and programmatic actions, or (2) as restoration and protection projects. Regulatory and programmatic actions include changes to local codes, ordinances and programs that are derived from the audit of local government capacity to protect the watershed. Examples of regulatory actions include adopting a stream buffer ordinance, encouraging conservation-oriented design of land development project, and establishing stringent stormwater criteria. Hiring watershed coordinators, ESC inspectors, or building a municipal street sweeping program are considered programmatic actions. Priority protection and restoration projects require implementation of priority, on-the-ground projects. Protection objectives generally involve land acquisition or applying conservation easements. Restoration projects include stream restoration, stormwater retrofits, and riparian reforestation, etc.

Since most communities will not be able to implement all the recommended actions or projects identified, it is important to go through a ranking process to identify priority sites. Not all recommendations are equal when it comes to implementation. Some recommendations, such as regulatory changes or land acquisition, may be more time sensitive than restoration projects, particularly in areas expecting significant development pressures in the short-term. Many large-scale stormwater retrofit or stream restoration projects require detailed planning and permitting which takes time, while buffer planting or trash cleanups are easy projects that can be completed in a few days.

Project ranking allows restoration projects to be compared together on a common basis to find the most cost-effective and feasible projects in the watershed. One of the key decisions in project ranking is whether to evaluate projects within the same group (e.g., stormwater retrofits) or evaluate all different types of projects together. There are pros and cons to each approach. In general, it is preferable to assess all groups of projects at the same time, as long as the ranking factors are compatible among the groups.

A proposed retrofit ranking system could include the following major factors:

1. Pollutant Removal Potential
 - Impervious area treated
 - Percent of water quality target volume treated
 - Pollutant load reduction
2. Project cost
3. Implementation feasibility based on ownership, wetland impact/permitting, access, maintenance, and utilities
4. Supplemental benefits such as habitat and public benefit

Ranking systems can vary by watershed based on what the specific needs are. The basic concept is to evaluate the relative merit of proposed retrofit sites by assigning points to a site based on its

ability to meet various criteria under each of the four major factors cited above. A ranking system can place an emphasis on (by weighting more heavily) a particular factor. For example, if the pollutant removal potential is most important, a larger percentage of the total points can be allocated to that category. Summing the assigned points for each of the factors gives an overall site score. Sites with the highest score represent the best overall candidates for implementation from a stormwater management vantage point.

The cost estimates can be based on a combination of compiled data in “Costs and Benefits of Stormwater BMPs” (Center for Watershed Protection, 1998) and best professional judgment based on experience. The cost estimate found in the CWP 1998 resource should be modified to account for elapsed time plus the incurred cost of implementing retrofits versus new construction. This provides for a more realistic, if not more conservative, cost estimate. The exact costs will vary from these estimates based on final engineering design, permitting and contingencies. Design, permitting and contingency costs can be generally estimated at approximately 30-35% of the base construction costs (CWP, 1998).

5.0 Watershed Plan Development

Once the restoration projects have been ranked, the above information should be compiled into a watershed plan, complete with all the relevant maps, forms, and other collected data. This plan can be used to justify specific improvement projects and should be updated if additional information becomes available or if priorities change. A good watershed plan is an excellent reference to have in order to select appropriate improvement projects when funding becomes available. It also will contain much of the supporting data and rationale necessary to secure grant funding with specific guidelines. The completion of an effective watershed plan indicates that a community or organization has thought through its watershed and strengths, weakness, and priorities and is prepared to move forward with organized corrective activities.

Attachment: Field Forms

1. Stormwater Retrofit Reconnaissance Inventory
2. Neighborhood Source Assessment
3. Hotspot Site Investigation
4. Pervious Area Assessment
5. Streets and Storm Drains

Stormwater Retrofit Reconnaissance Inventory

1. Site Number: _____
2. Location (Address and/or Parcel ID) _____
3. Description (preliminary assessment of most likely retrofit-quality, quantity, or both):

4. Unique elements of retrofit (e.g., method of conveyance or stormwater diversion):

5. Date of Preliminary Survey: _____
6. Property Ownership (public or private): _____
7. Drainage Area: . _____
8. Approximate imperviousness (%): _____
9. Adjacent Land Use (Possible conflicts): _____

10. Conflicts with Existing Utilities: _____

11. Construction and Maintenance Access:

12. Wetlands Present? ☐ Yes ☐ No
If yes, describe: _____

13. Retrofit Volume Computations: _____

14. Photo # _____

Stormwater Retrofit Reconnaissance Inventory

15. Additional Notes and/or Sketch Information:

16. Site Candidate for Further Investigation:

☐ Yes

☐ No

WATERSHED:	SUBWATERSHED:	UNIQUE SITE ID:	
DATE: ___/___/___	ASSESSED BY:	CAMERA ID:	PIC#:
A. NEIGHBORHOOD CHARACTERIZATION			
Neighborhood/Subdivision Name: _____		Neighborhood Area (acres) _____	
If unknown, address (or streets) surveyed: _____			
Homeowners Association? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Unknown If yes, name and contact information: _____			
Residential (circle average single family lot size): _____			
<input type="checkbox"/> Single Family Attached (Duplexes, Row Homes) <1/8 1/8 1/4 1/3 1/2 acre		<input type="checkbox"/> Multifamily (Apts, Townhomes, Condos)	
<input type="checkbox"/> Single Family Detached <1/4 1/4 1/2 1 >1 acre		<input type="checkbox"/> Mobile Home Park	
Estimated Age of Neighborhood: _____ years	Percent of Homes with Garages: _____%	With Basements _____%	INDEX*
Sewer Service? <input type="checkbox"/> Y <input type="checkbox"/> N			○
Index of Infill, Redevelopment, and Remodeling <input type="checkbox"/> No Evidence <input type="checkbox"/> <5% of units <input type="checkbox"/> 5-10% <input type="checkbox"/> >10%			○
Record percent observed for each of the following indicators, depending on applicability and/or site complexity		Percentage	Comments/Notes
B. YARD AND LAWN CONDITIONS			
B1. % of lot with impervious cover			
B2. % of lot with grass cover			○
B3. % of lot with landscaping (e.g., mulched bed areas)			◇
B4. % of lot with bare soil			○
*Note: B1 through B4 must total 100%			
B5. % of lot with forest canopy			◇
B6. Evidence of permanent irrigation or "non-target" irrigation			○
B7. Proportion of total neighborhood turf lawns with following management status:	High: _____		○
	Med: _____		
	Low: _____		
B8. Outdoor swimming pools? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell Estimated # _____			○
B9. Junk or trash in yards? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			○
C. DRIVEWAYS, SIDEWALKS, AND CURBS			
C1. % of driveways that are impervious <input type="checkbox"/> N/A			
C2. Driveway Condition <input type="checkbox"/> Clean <input type="checkbox"/> Stained <input type="checkbox"/> Dirty <input type="checkbox"/> Breaking up			○
C3. Are sidewalks present? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, are they on one side of street <input type="checkbox"/> or along both sides <input type="checkbox"/>			
<input type="checkbox"/> Spotless <input type="checkbox"/> Covered with lawn clippings/leaves <input type="checkbox"/> Receiving 'non-target' irrigation			○
What is the distance between the sidewalk and street? _____ ft.			◇
Is pet waste present in this area? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> N/A			○
C4. Is curb and gutter present? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, check all that apply:			
<input type="checkbox"/> Clean and Dry <input type="checkbox"/> Flowing or standing water <input type="checkbox"/> Long-term car parking <input type="checkbox"/> Sediment			○
<input type="checkbox"/> Organic matter, leaves, lawn clippings <input type="checkbox"/> Trash, litter, or debris <input type="checkbox"/> Overhead tree canopy			◇

* INDEX: ○ denotes potential pollution source; ◇ denotes a neighborhood restoration opportunity

D. ROOFTOPS										
D1. Downspouts are directly connected to storm drains or sanitary sewer									◇ ○	
D2. Downspouts are directed to impervious surface										
D3. Downspouts discharge to pervious area										
D4. Downspouts discharge to a cistern, rain barrel, etc.										
<i>*Note: C1 through C4 should total 100%</i>										
D5. Lawn area present downgradient of leader for rain garden? <input type="checkbox"/> Y <input type="checkbox"/> N									◇	
E. COMMON AREAS										
E1. Storm drain inlets? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, are they stenciled? <input type="checkbox"/> Y <input type="checkbox"/> N Condition: <input type="checkbox"/> Clean <input type="checkbox"/> Dirty										◇
Catch basins inspected? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, include Unique Site ID from SSD sheet: _____										○
E2. Storm water pond? <input type="checkbox"/> Y <input type="checkbox"/> N Is it a <input type="checkbox"/> wet pond or <input type="checkbox"/> dry pond? Is it overgrown? <input type="checkbox"/> Y <input type="checkbox"/> N What is the estimated pond area? <input type="checkbox"/> <1 acre <input type="checkbox"/> about 1 acre <input type="checkbox"/> > 1 acre										◇
E3. Open Space? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, is pet waste present? <input type="checkbox"/> Y <input type="checkbox"/> N dumping? <input type="checkbox"/> Y <input type="checkbox"/> N										○
Buffers/floodplain present: <input type="checkbox"/> Y <input type="checkbox"/> N If yes, is encroachment evident? <input type="checkbox"/> Y <input type="checkbox"/> N										
F. INITIAL NEIGHBORHOOD ASSESSMENT AND RECOMMENDATIONS										
Based on field observations, this neighborhood has significant indicators for the following: <i>(check all that apply)</i> <input type="checkbox"/> Nutrients <input type="checkbox"/> Oil and Grease <input type="checkbox"/> Trash/Litter <input type="checkbox"/> Bacteria <input type="checkbox"/> Sediment <input type="checkbox"/> Other _____										○
Recommended Actions <i>Specific Action</i> <input type="checkbox"/> Onsite retrofit potential? <input type="checkbox"/> Better lawn/landscaping practice? <input type="checkbox"/> Better management of common space? <input type="checkbox"/> Pond retrofit? <input type="checkbox"/> Multi-family Parking Lot Retrofit? <input type="checkbox"/> Other action(s) _____					Describe Recommended Actions:					
Initial Assessment										
NSA Pollution Severity Index <input type="checkbox"/> Severe (More than 10 circles checked) <input type="checkbox"/> High (5 to 10 circles checked) <input type="checkbox"/> Moderate (Fewer than 5 circles checked) <input type="checkbox"/> None (No circles checked)										
Neighborhood Restoration Opportunity Index <input type="checkbox"/> High (More than 5 diamonds checked) <input type="checkbox"/> Moderate (3-5 diamonds checked) <input type="checkbox"/> Low (Fewer than 3 diamonds checked)										

Watershed:	Subwatershed:		Unique Site ID:
Date:	Assessed By:	Camera ID:	Pic#:
Map Grid:	Lat ____° ____' ____" Long ____° ____' ____"		LMK #
A. Site Data and Basic Classification			
Name and Address: _____		Category: <input type="checkbox"/> Commercial <input type="checkbox"/> Industrial <input type="checkbox"/> Miscellaneous <input type="checkbox"/> Institutional <input type="checkbox"/> Municipal <input type="checkbox"/> Golf Course <input type="checkbox"/> Transport-Related <input type="checkbox"/> Marina <input type="checkbox"/> Animal Facility	
SIC code (if available): _____		Basic Description of Operation: _____	
NPDES Status: <input type="checkbox"/> Regulated <input type="checkbox"/> Unregulated <input type="checkbox"/> Unknown			
			INDEX *
B. Vehicle Operations <input type="checkbox"/> N/A (Skip to part C)			Observed Pollution Source? <input type="checkbox"/>
B1. Types of vehicles: <input type="checkbox"/> Fleet vehicles <input type="checkbox"/> School buses <input type="checkbox"/> Boats <input type="checkbox"/> Other: _____			
B2. Approximate number of vehicles: _____			
B3. Vehicle activities (circle all that apply): Maintained Repaired Recycled Fueled Washed Painted Stored			<input type="radio"/>
B4. Are vehicles stored and/or repaired outside? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
Are these vehicles lacking runoff diversion methods? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
B5. Is there evidence of spills/leakage from vehicles? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
B6. Are uncovered outdoor fueling areas present? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
B7. Are fueling areas directly connected to storm drains? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
B8. Are vehicles washed outdoors? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
Does the area where vehicles are washed discharge to the storm drain? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
C. Outdoor Materials <input type="checkbox"/> N/A (Skip to part D)			Observed Pollution Source? <input type="checkbox"/>
C1. Are loading/unloading operations present? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
If yes, are they uncovered <i>and</i> draining towards a storm drain inlet? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
C2. Are materials stored outside? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell If yes, are they <input type="checkbox"/> Liquid <input type="checkbox"/> Solid Description: _____			<input type="radio"/>
Where are they stored? <input type="checkbox"/> grass/dirt area <input type="checkbox"/> concrete/asphalt <input type="checkbox"/> bermed area			<input type="radio"/>
C3. Is the storage area directly or indirectly connected to storm drain (circle one)? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
C4. Is staining or discoloration around the area visible? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
C5. Does outdoor storage area lack a cover? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
C6. Are liquid materials stored <i>without</i> secondary containment? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
C7. Are storage containers missing labels or in poor condition (rusting)? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
D. Waste Management <input type="checkbox"/> N/A (Skip to part E)			Observed Pollution Source? <input type="checkbox"/>
D1. Type of waste (check all that apply): <input type="checkbox"/> Garbage <input type="checkbox"/> Construction materials <input type="checkbox"/> Hazardous materials			<input type="radio"/>
D2. Dumpster condition (check all that apply): <input type="checkbox"/> No cover/Lid is open <input type="checkbox"/> Damaged/poor condition <input type="checkbox"/> Leaking or evidence of leakage (stains on ground) <input type="checkbox"/> Overflowing			<input type="radio"/>
D3. Is the dumpster located near a storm drain inlet? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
If yes, are runoff diversion methods (berms, curbs) lacking? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell			<input type="radio"/>
E. Physical Plant <input type="checkbox"/> N/A (Skip to part F)			Observed Pollution Source? <input type="checkbox"/>
E1. Building: Approximate age: ____yrs. Condition of surfaces: <input type="checkbox"/> Clean <input type="checkbox"/> Stained <input type="checkbox"/> Dirty <input type="checkbox"/> Damaged			<input type="radio"/>
Evidence that maintenance results in discharge to storm drains (staining/discoloration)? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Don't know			<input type="radio"/>

*Index: ○ denotes potential pollution source; ☐ denotes confirmed polluter (evidence was seen)

WATERSHED:		SUBWATERSHED:		UNIQUE SITE ID:	
DATE: ___/___/___		ASSESSED BY:		CAMERA ID:	
MAP GRID:		LAT ___° ___' ___" LONG ___° ___' ___"			LMK #
A. PARCEL DESCRIPTION					
Size: ___ acre(s) Access to site (<i>check all that apply</i>): <input type="checkbox"/> Foot access <input type="checkbox"/> Vehicle access <input type="checkbox"/> Heavy equipment access Ownership: <input type="checkbox"/> Private <input type="checkbox"/> Public Current Management: <input type="checkbox"/> School <input type="checkbox"/> Park <input type="checkbox"/> Right-of-way <input type="checkbox"/> Vacant land <input type="checkbox"/> Other (please describe) _____ Contact Information: _____ Connected to other pervious area? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, what type? <input type="checkbox"/> Forest <input type="checkbox"/> Wetland <input type="checkbox"/> Other _____ Estimated size of connected pervious area: ___ acre(s) Record Unique Site ID of connected fragment: _____					
PART I. NATURAL AREA REMNANT					
FOREST			WETLAND		
B. CURRENT VEGETATIVE COVER			B. CURRENT VEGETATIVE COVER		
B1. Percent of forest with the following canopy coverage: Open ___% Partly shaded ___% Shaded ___% <i>*Note – these should total 100%</i> B2. Dominant tree species: _____ _____ B3. Understory species: _____ _____ B4. Are invasive species present? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Unknown If yes, % of forest with invasives: _____ Species: _____			B1. % of wetland with following vegetative zones: Aquatic: _____ Emergent: _____ Forested: _____ <i>*Note – these should total 100%</i> B2. Dominant species: _____ _____ B3. Are invasive species present? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Unknown If yes, % of wetland with invasives: _____ Species: _____		
C. FOREST IMPACTS			C. WETLAND IMPACTS		
C1. Observed Impacts (<i>check all that apply</i>): <input type="checkbox"/> Animals <input type="checkbox"/> Clearing/encroachment <input type="checkbox"/> Trash and dumping <input type="checkbox"/> Storm water runoff <input type="checkbox"/> Other			C1. Observed Impacts (<i>check all that apply</i>): <input type="checkbox"/> Animals <input type="checkbox"/> Clearing/encroachment <input type="checkbox"/> Trash and dumping <input type="checkbox"/> Storm water runoff <input type="checkbox"/> Hydrologic impacts <input type="checkbox"/> Other		
D. NOTES			D. NOTES		
E. INITIAL RECOMMENDATION					
<input type="checkbox"/> Good candidate for conservation/protection <input type="checkbox"/> Potential restoration candidate <input type="checkbox"/> Poor restoration or conservation candidate					

PART II. OPEN PERVIOUS AREAS**A. CURRENT VEGETATIVE COVER****A1.** Percent of assessed surface with:

Turf _____% Other Herbaceous _____% None (bare soil) _____% Trees _____% Shrubs _____% Other _____%

(please describe): _____ *Note – these should total 100%

A2. Turf: Height: _____ inches Apparent Mowing Frequency: ☐ Frequent ☐ Infrequent ☐ No-Mow ☐ Unknown
Condition (check all that apply): ☐ Thick/Dense ☐ Thin/Sparse ☐ Clumpy/Bunchy ☐ Continuous Cover**A3.** Thickness of organic matter at surface: _____ inches**A4.** Are invasive species present? ☐ Y ☐ N ☐ Unknown If yes, % of site with invasives: _____

Species: _____

B. IMPACTS**B1.** Observed Impacts (check all that apply): ☐ Soil Compaction ☐ Erosion ☐ Trash and Dumping☐ Poor Vegetative Health ☐ Other (describe): _____**C. REFORESTATION CONSTRAINTS****C1.** Sun exposure: ☐ Full sun ☐ Partial sun ☐ Shade ☐ Unknown**C2.** Nearby water source? ☐ Y ☐ N ☐ Unknown**C3.** Other constraints: ☐ Overhead wires ☐ Underground Utilities ☐ Pavement ☐ Buildings
☐ Other (please describe): _____**D. NOTES****E. INITIAL RECOMMENDATION**

- ☐ Good candidate for natural regeneration
- ☐ May be reforested with minimal site preparation
- ☐ May be reforested with extensive site preparation
- ☐ Poor reforestation or regeneration site

PART III. SKETCH

WATERSHED:	SUBWATERSHED:	UNIQUE SITE ID:				
DATE: ____/____/____	ASSESSED BY:	CAMERA ID:				
MAP GRID	RAIN IN LAST 24 HOURS <input type="checkbox"/> Y <input type="checkbox"/> N	PIC #				
A. LOCATION						
A1. Street names or neighborhood surveyed: _____						
A2. Adjacent land use: <input type="checkbox"/> Residential <input type="checkbox"/> Commercial <input type="checkbox"/> Industrial <input type="checkbox"/> Institutional <input type="checkbox"/> Municipal <input type="checkbox"/> Transport-Related						
A3. Corresponding HSI or NSA field sheet? If so, circle HSI or NSA and record its Unique Site ID here _____						
B. STREET CONDITIONS						
B1. Road Type: <input type="checkbox"/> Arterial <input type="checkbox"/> Collector <input type="checkbox"/> Local <input type="checkbox"/> Alley <input type="checkbox"/> Other: _____						
B2. Condition of Pavement: <input type="checkbox"/> New <input type="checkbox"/> Good <input type="checkbox"/> Cracked <input type="checkbox"/> Broken						
B3. Is on-street parking permitted <input type="checkbox"/> Y <input type="checkbox"/> N If yes, approximate number of cars per block: _____						
B4. Are large cul-de-sacs present? <input type="checkbox"/> Y <input type="checkbox"/> N						
B5. Is trash present in curb and gutter? If so, use the index to the right to record amount.	Index Rating for Accumulation in Gutters					
	Clean			Filthy		
	Sediment	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5
	Organic Material	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5
Litter	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	
C. STORM DRAIN INLETS AND CATCH BASINS						
C1. Type of storm drain conveyance: <input type="checkbox"/> open <input type="checkbox"/> enclosed <input type="checkbox"/> mixed						
C2. Percentage of inlets with catch basin storage: <input type="checkbox"/> N/A						
Sample 1-2 catch basins per NSA/HSI	C3. Catch basin #1		C4. Catch basin #2			
Latitude	° ' "		° ' "			
Longitude	° ' "		° ' "			
LMK #						
Picture #						
Current Condition	<input type="checkbox"/> Wet <input type="checkbox"/> Dry		<input type="checkbox"/> Wet <input type="checkbox"/> Dry			
Condition of Inlet	<input type="checkbox"/> Clear <input type="checkbox"/> Obstructed		<input type="checkbox"/> Clear <input type="checkbox"/> Obstructed			
Litter Accumulation	<input type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Organics Accumulation	<input type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Sediment Accumulation	<input type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Sediment Depth (in feet)	_____ ft.		_____ ft.			
Water Depth	_____ ft.		_____ ft.			
Evidence of oil and grease	<input type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Sulfur smell	<input type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Accessible to vacuum truck	<input type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
D. NON-RESIDENTIAL PARKING LOT (>2 acres)						
D1. Approximate size: _____ acres						
D2. Lot Utilization: <input type="checkbox"/> Full <input type="checkbox"/> About half full <input type="checkbox"/> Empty						
D3. Overall condition of Pavement: <input type="checkbox"/> Smooth (no cracks) <input type="checkbox"/> Medium (few cracks) <input type="checkbox"/> Rough (many cracks) <input type="checkbox"/> Very Rough (numerous cracks and depressions)						
D4. Is lot served by a storm water treatment practice? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, describe: _____						
D5. On-site retrofit potential: <input type="checkbox"/> Excellent <input type="checkbox"/> Good <input type="checkbox"/> Poor						

E. MUNICIPAL POLLUTANT REDUCTION STRATEGIES**E1.** Degree of pollutant accumulation in the system: ☐ High ☐ Medium ☐ Low ☐ None**E2.** Rate the feasibility of the following pollution prevention strategies:Street Sweeping: ☐ High ☐ Moderate ☐ LowStorm Drain Stenciling: ☐ High ☐ Moderate ☐ LowCatch Basin Clean-outs: ☐ High ☐ Moderate ☐ LowParking Lot Retrofit Potential: ☐ High ☐ Moderate ☐ Low**CATCH BASIN SKETCHES**

#1

#2

Notes:

APPENDIX C

Description of Proposed Best Management Practices


DESCRIPTION OF PROPOSED BEST MANAGEMENT PRACTICES

The best management practices proposed for implementation at sites in the Hashamomuck Pond watershed include bioretention systems, micro-bio inlets, constructed wetland, dry swales, grass channels, oil/grit separators, and sediment forebays. A detailed description of each is included below.

1. Bioretention System

The bioretention system (also referred to as a “rain garden” or a “biofilter”) is a stormwater management practice to manage and treat stormwater runoff using a conditioned soil bed and planting materials to filter runoff stored within a shallow depression. The method combines physical filtering and adsorption with bio-geochemical processes to remove pollutants. The system consists of an inflow component, a pretreatment element, an overflow structure, a shallow ponding area (less than 6” deep), a surface organic layer of mulch, a planting soil bed, plant materials, and an underdrain system to convey treated runoff to a downstream facility (see Figure C-1).

Figure C-1: Schematic of a Bioretention System (Claytor & Schueler, 1996)

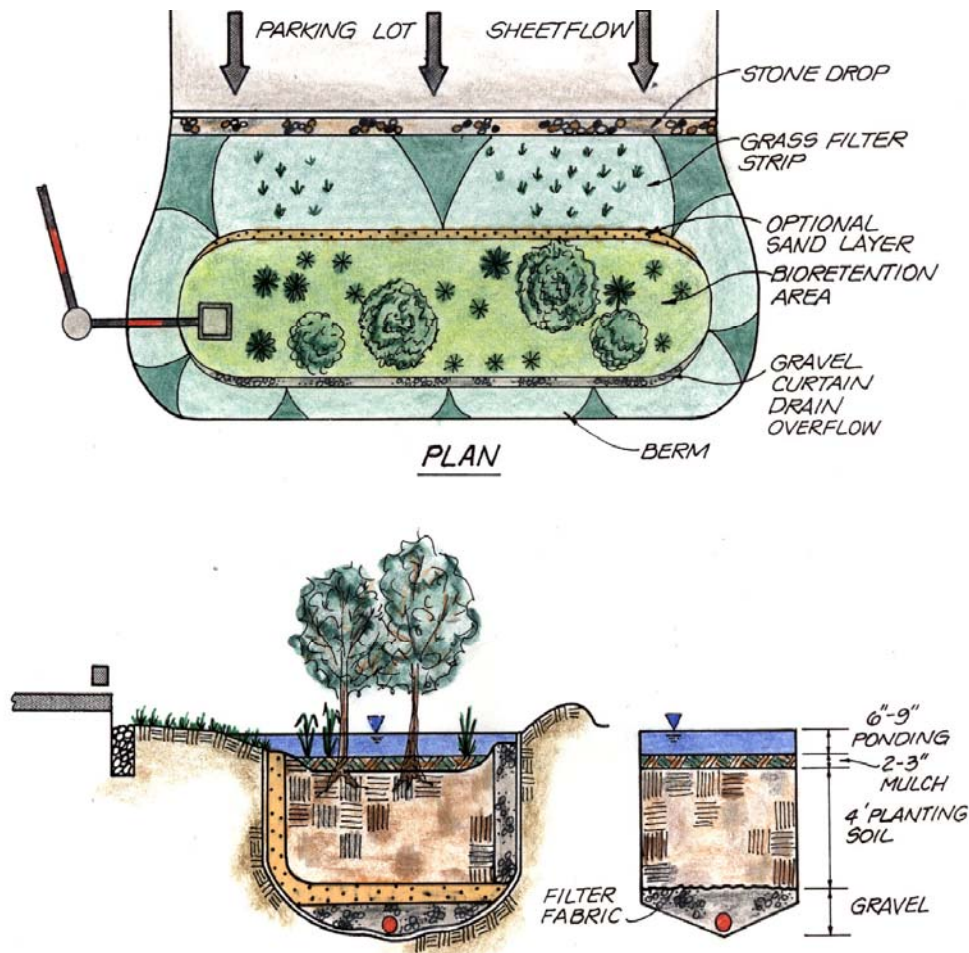

Bioretention facility surface areas are typically sized at a ratio of 5% of the impervious area draining to the facility to capture, manage, and treat runoff from the 1.2-inch precipitation event (Claytor & Schueler, 1996). Pretreatment for bioretention consists of a grass channel or grass filter strip, a gravel diaphragm / stone drop, and a mulch layer. In addition, there are several physical geometry recommendations that should be considered in the layout and design of bioretention facilities. Suggested design guidance is included in Table C-1.

Bioretention facilities are cost-effective measures designed to help meet many of the management objectives of watershed protection. Because these practices are proportional to the percentage of impervious area, the cost is relatively constant with drainage area. Unlike retention ponds and constructed stormwater wetlands, whose cost decreases with increasing drainage area, bioretention does not benefit from economies of scale. Typical capital construction costs are in the range of approximately \$7 to \$8 per cubic foot of storage. Annual maintenance cost is approximately 5 to 7% of capital construction costs or in the range of \$900 to \$1,000 per impervious acre treated.

Table C-1. Design Guidance for a Bioretention System

Design Guidance	
Minimum width	10 feet
Minimum length	15 feet
Length to width ratio	2:1
Maximum ponding depth	6 inches
Planting soil depth	4 feet
Underdrain system	6" pipe in 8" gravel bed
Plant spacing	trees* at 10-foot centers; shrubs* at 5-foot centers; herbaceous materials* at 1- to 2-foot centers

*See the Native Plant Guide (Table H.5) in the New York State Stormwater Management Design Manual for particular native plant species that work well in bioretention systems.

Inspections are an integral part of system maintenance. During the six months immediately after construction, bioretention facilities should be inspected at least twice or more following precipitation events of at least 0.5 inch to ensure that the system is functioning properly. Thereafter, inspections should be conducted on an annual basis and after storm events of greater than or equal to the water quality storm event. Minor soil erosion gullies should be repaired when they occur. Pruning or replacement of woody vegetation should occur when dead or dying vegetation is observed. Separation of herbaceous vegetation root stock should occur when over-crowding is observed, or approximately once every 3 years. The mulch layer should also be replenished (to the original design depth) every other year as directed by inspection reports. The previous mulch layer would be removed, and properly disposed of, or roto-tilled into the soil

surface. If at least 50% vegetation coverage is not established after two years, a reinforcement planting should be performed. If the surface of the bioretention system becomes clogged to the point that standing water is observed on the surface 48 hours after precipitation events, the surface should be roto-tilled or cultivated to breakup any hard-packed sediment, and then revegetated.


2. Micro-Bio Inlet

Micro-bio inlets are small-scale versions of bioretention systems (Figure C-2). They are recommended at locations where a full-size bioretention system will not fit. Existing roadside catch basins can be used as the overflow structure, and the filter media and plantings can be installed around it, forming an island. Curbing with inlet cuts and traffic bollards are required to prevent damage from vehicles while still allowing stormwater to enter. A curtain of stone or gravel should be used to provide pretreatment of the stormwater prior to the filter portion of this BMP.


Costs for Micro-bio inlets are higher than bioretention systems since additional traffic control and pavement restoration are needed. Typical capital construction costs are in the range of approximately \$10 to \$12 per cubic foot of storage. Annual maintenance cost is approximately 5 to 7% of capital construction costs.

Maintenance requirements are similar to bioretention systems. Inspections are an integral part of system maintenance. During the six months immediately after construction, micro-bio inlets should be inspected at least twice, or more, following precipitation events of at least 0.5 inch to ensure that the system is functioning properly. Thereafter, inspections should be conducted on an annual basis and after storm events of greater than or equal to the water quality storm event. Minor soil erosion gullies should be repaired when they occur. Pruning or replacement of woody vegetation should occur when dead or dying vegetation is observed. Separation of herbaceous vegetation root stock should occur when over-crowding is observed, or approximately once every 3 years. The mulch layer should also be replenished (to the original design depth) every other year as directed by inspection reports. The previous mulch layer would be removed, and properly disposed of, or roto-tilled into the soil surface. If at least 50% vegetation coverage is not established after two years, a reinforcement planting should be performed. If the surface of the bioretention system becomes clogged to the point that standing water is observed on the surface 48 hours after precipitation events, the surface should be roto-tilled or cultivated to breakup any hard-packed sediment, and then revegetated.

Figure C-2: Schematic of a Micro-Bio Inlet

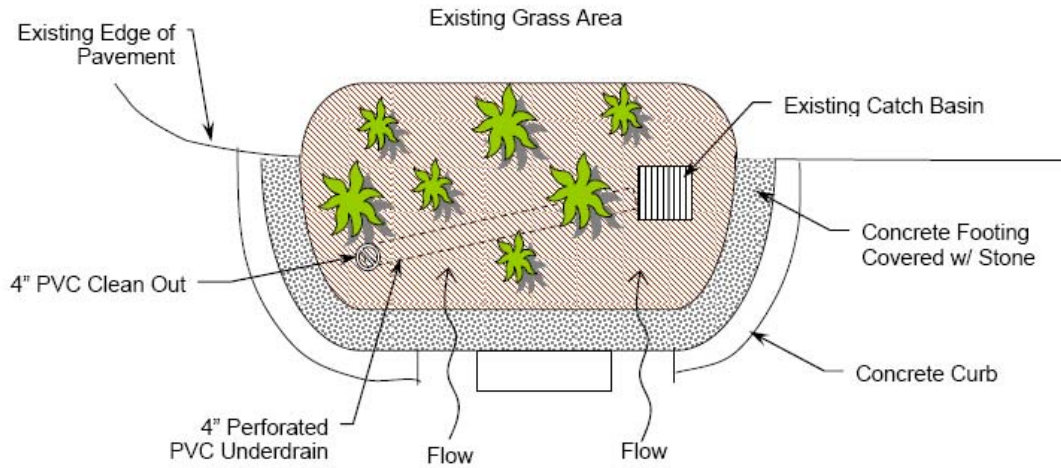

Micro-Bio Inlet Schematic Plan

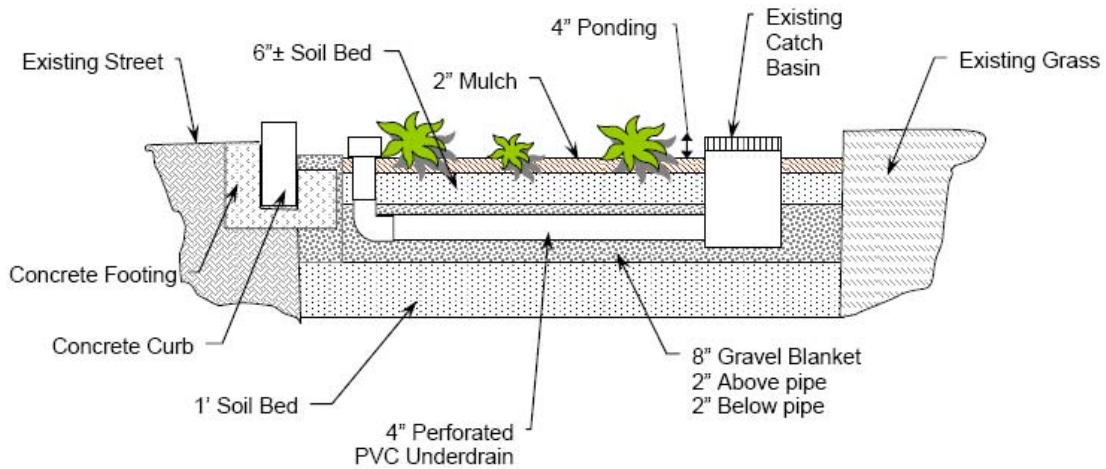

Micro-Bio Inlet Schematic Profile

3. Constructed Wetland

Constructed wetlands are excavated basins with irregular perimeters and undulating bottom contours into which wetland vegetation is purposely placed to enhance pollutant removal from stormwater runoff. The constructed wetland systems used in stormwater management practices are designed to maximize the removal of pollutants from stormwater runoff via several mechanisms: microbial breakdown of pollutants, plant uptake, retention, settling, and adsorption.

There are four basic designs of free-water surface constructed wetlands: shallow marsh, extended detention wetland, pond/wetland system, and pocket wetland. In this study, it is likely that two of the four may be proposed, a shallow marsh and a pocket wetland, based on the ability of the chosen sites to meet the specified design criteria for the various types of constructed wetlands. A shallow marsh stores runoff in a shallow basin (Figure C-3) and is used to provide channel protection volume as well as overbank and extreme flood attenuation. Pocket wetlands are similar to shallow marshes; however, they are dependant on groundwater to maintain permanent water surface and are only generally used to provide water quality treatment.

A site appropriate for a wetland must have an adequate water flow and appropriate underlying soils. Baseflow from the drainage area or groundwater must be sufficient to maintain a shallow pool in the wetland and support the vegetation, including species susceptible to damage during dry periods. Pretreatment for a shallow marsh or a pocket wetland consists of a forebay sized to treat at least 10% of the required total water quality volume. General design criteria for a shallow marsh and pocket wetland are summarized in Table C-2.

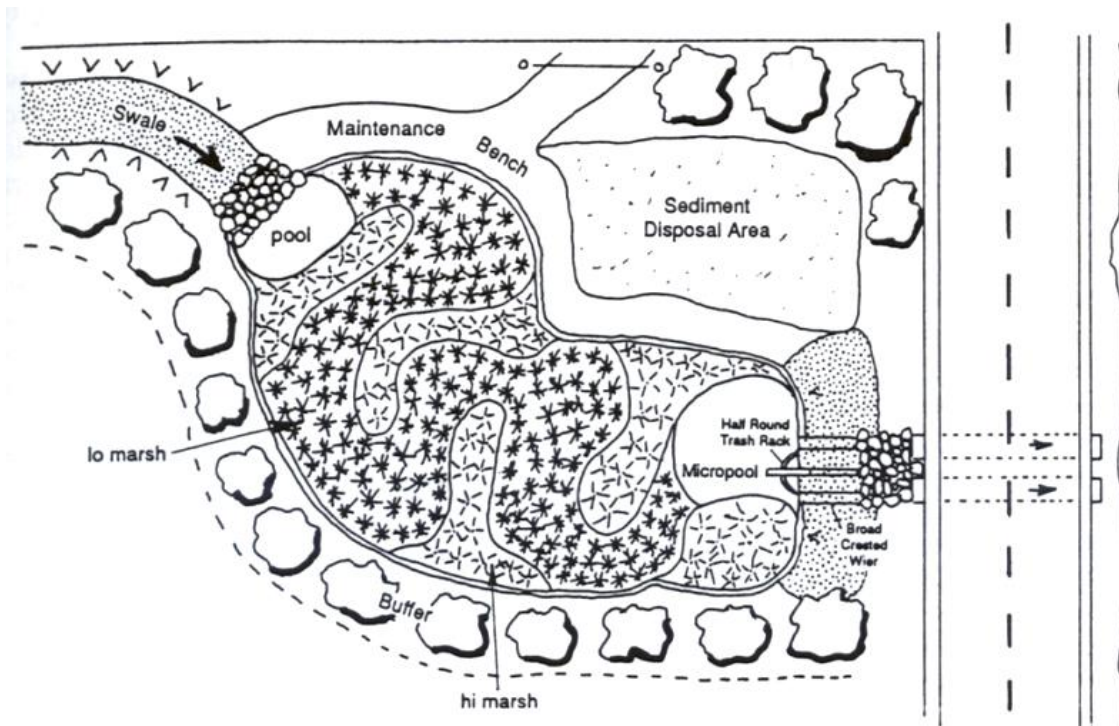


Figure C-3: Schematic of a Shallow Marsh / Pocket Wetland (Schueler, 1992)

Table C-2: Constructed Wetland Design Criteria (Schueler, 1992)

Design Criteria	Shallow Marsh	Pocket Wetland
Wetland/Watershed Ratio ¹	0.02	0.01
Minimum Drainage Area	25 acre	1-10 acre
Length to Width Ratio (minimum)	1:1	1:1
Extended Detention (ED)	No	No
Allocation of Treatment Volume (pool, marsh, ED)	20/40/40	10/40/50
Allocation of Surface Area (deep water, low marsh, high marsh) ²	20/40/40	10/40/50
Cleanout Frequency	10 yrs	10 yrs
Forebay	Required	Optional
Micropool	Required	Optional
Buffer	25 to 50 ft	0 to 25 ft
Pondscaping Plan Requirements	Emphasize wildlife habitat marsh microtopography, buffer	Pondscaping plan optional

Notes: 1. Ratio of approximate surface area of constructed wetland to the total watershed drainage area
2. Deep water – 1.5 to 6 feet below normal pool level
Low marsh – 0.5 to 1.5 feet below normal pool level
High marsh – 0.5 feet below normal pool level

Costs incurred for stormwater wetlands include those for permitting, design, construction and maintenance. Permitting, design and contingency costs are estimated at 25 % of the construction costs (EPA, 1999). Stormwater wetlands with a sediment forebay can range in cost, from \$26,000 to \$55,000 per acre of wetland (EPA, 1999). This includes costs for clearing and grubbing, erosion and sediment control, excavating, grading, staking, and planting. Other sources have reported typical unit base costs for stormwater wetlands range from \$1.20 to \$2.50 per cubic foot (CWP, 1998). Maintenance costs for wetlands are estimated at 2 % per year of the construction costs (CWP, 1998).


Like all stormwater management practices, maintenance is required for proper operation of constructed wetlands. Constructed wetlands require routine maintenance such as sediment removal. The majority of sediments should be trapped and removed from the forebay annually. Careful observation of the system over time is required, for the first three years after construction, biannual inspections during both the growing and non-growing season. The vegetative condition should be observed closely to determine the health of the wetland. Vegetative conditions include the types and distribution of dominant wetland plants, the presence and distribution of planted wetland species, and signs that volunteer species are replacing the planted wetland species.

4. Dry Swale

Dry swales are concave, vegetated conveyance systems that can improve water quality through infiltration and filtering. When designed properly, they can be used to retain and

treat stormwater runoff. Dry swales are appropriate in areas where standing water is not desirable such as residential, commercial, industrial areas and highway medians. In dry swales, a prepared soil bed is designed to filter the runoff for water quality (Figure C-4). Runoff is then collected in an underdrain system and discharged to the downstream drainage system. The design objective for dry swales is to drain down within twenty-four hours of a storm event, which is similar to a bioretention system; except that the pollutant uptake is likely to be more limited, since only a grass cover crop is available for nutrient uptake.

Figure C-4: Schematic of a Dry Swale (Claytor & Schueler, 1996)

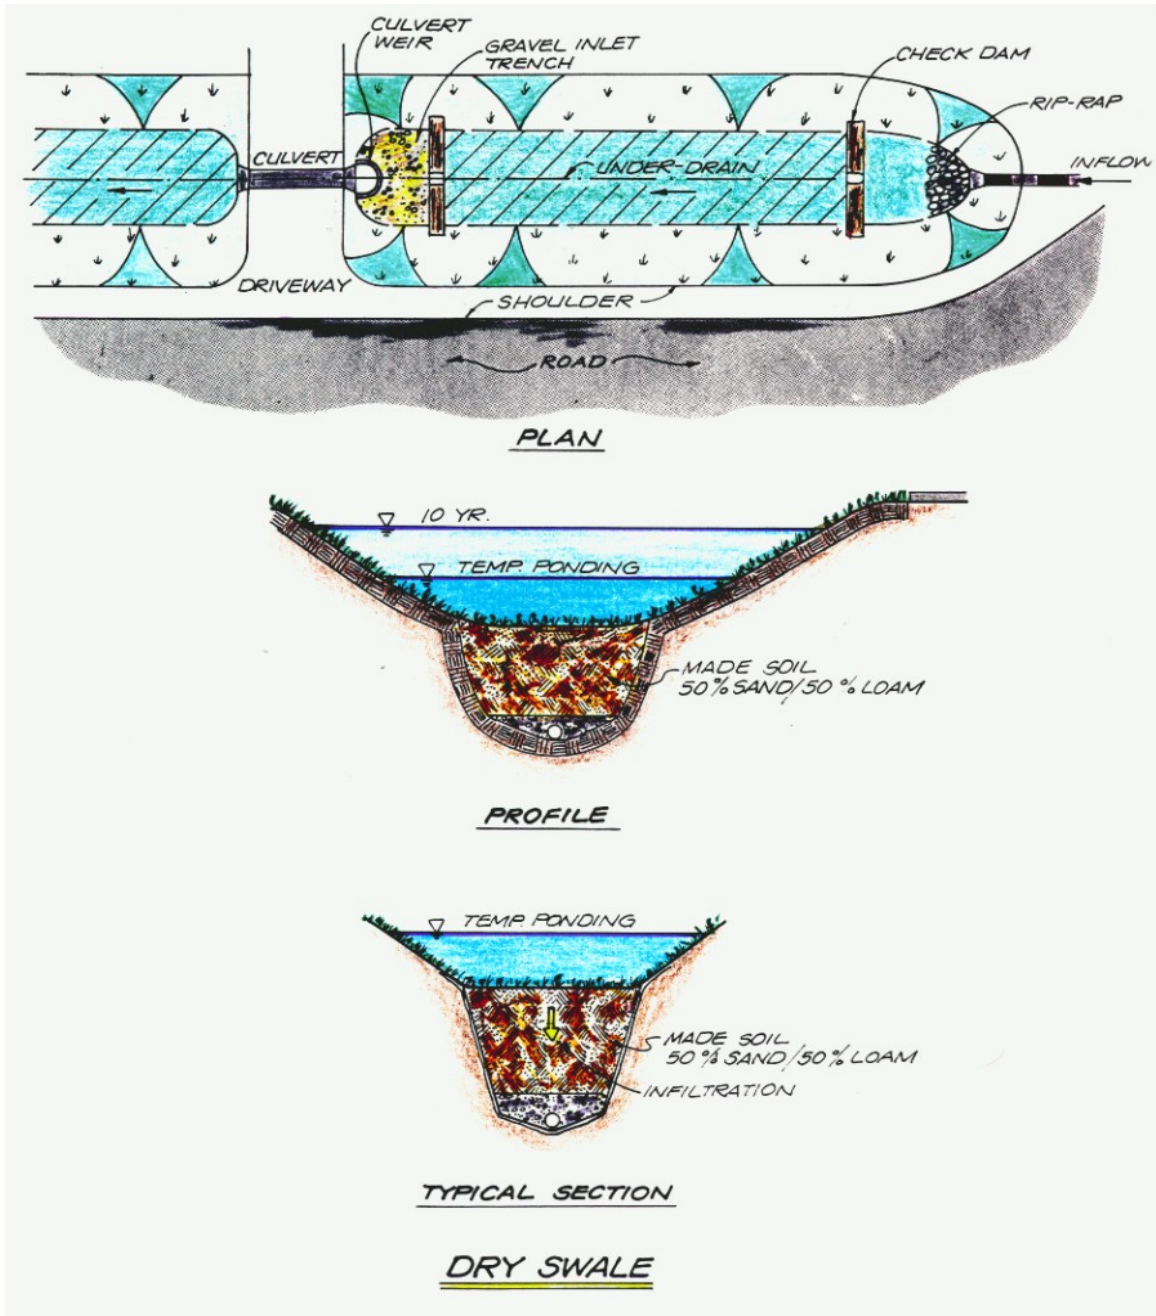

The general design of dry swales takes into consideration the following design criteria (Table C-3):

Table C-3: Design Criteria for Dry Swales (Claytor and Schueler, 1996)

Design Criteria	
Bottom Width	2 feet minimum, 8 feet maximum, widths up to 16 feet are allowable if a dividing berm or structure is used
Side Slopes	2:1 maximum, 3:1 or flatter preferred
Longitudinal Slope	1.0% to 2.0% without check dams
Flow Depth and Capacity	Surface storage of water quality volume with a maximum depth of 18 inches for water quality treatment (12 inches average depth). Adequate capacity for 10-year storm with 6 inches of freeboard
Flow Velocity	4.0 fps to 5.0 fps for 2-year storm
Length	Length necessary to drain (dry swale) runoff for 24 hours

A designed swale, such as a dry swale with prepared soil and underdrain piping, has an estimated cost of \$4.25 per cubic foot (SWRPC, 1991). Relative to other filtering system options, these costs are considered to be moderate to low. Most recent cost estimates have approximated \$19 per linear feet for dry swales. The annual maintenance cost can range from 5 to 7% of the construction cost (SWRPC, 1991).

The life of dry swales is directly proportional to the maintenance frequency. The maintenance objective for this practice includes keeping up the hydraulic and removal efficiency of the channel and maintaining a dense, healthy grass cover. The following activities are recommended on an annual basis or as needed:

- Mowing and litter and debris removal
- Stabilization of eroded side slopes and bottom
- Nutrient and pesticide use management
- Dethatching swale bottom and removal of thatching
- Discing or aeration of swale bottom

Every five years, scraping of the channel bottom and removal of sediment to restore original cross section and infiltration rate, and seeding or sodding to restore ground cover are recommended.

Dry swales should be inspected on an annual basis and just after storms of greater than or equal to the water quality storm event. Both the structural and vegetative components should be inspected and repaired. When sediment accumulates to a depth of approximately 3 inches, it should be removed, and the swale should be reconfigured to its original dimensions. The grass in the dry swale should be mowed at least 4 times during the growing season. If the surface of the dry swale becomes clogged to the point that standing water is observed in the surface 48 hours after precipitation events, the bottom should be roto-tilled or cultivated to break up any hard-packed sediment, and then reseeded. Trash and debris should be removed and properly disposed.

5. Grass Channel

Grass drainage channels (also commonly referred to as swales) are proposed for conveyance and pretreatment use (Figure C-5). Grassed drainage channels accent the natural landscape, break up impervious areas, and are appropriate alternatives to curb and gutter systems. They are best suited to treat runoff from lower density areas and roadways. They are often used in combination with other stormwater management practices as a part of the runoff conveyance system to provide pre-treatment. They are designed for water quality treatment and provide limited infiltration to groundwater.

The design criteria for grass channels are similar to dry swales (see Table C-4). However, the costs to construct grass channels are much lower because the prepared soil and underdrain system are not part of the design. Grass channels have an estimated cost of \$0.50 per cubic foot (based on cost per square foot, and assuming 6-inch of storage in the filter) (SWRPC, 1991). The annual maintenance cost can range from 5 to 7 % of the construction cost (SWRPC, 1991).


Similar to dry swales, the lifetime of grass channels is directly proportional to the maintenance frequency. The maintenance objective for this practice includes preserving or retaining the hydraulic and removal efficiency of the channel and maintaining a dense, healthy grass cover. The following activities are recommended on an annual basis or as needed:

- Mowing and litter and debris removal
- Stabilization of eroded side slopes and bottom
- Nutrient and pesticide use management
- Dethatching swale bottom and removal of thatching
- Discing or aeration of swale bottom

Table C-4: Design Criteria for Grass Channels (Claytor and Schueler, 1996)

Design Criteria	
Bottom Width	2 feet minimum, 6 feet maximum, widths up to 12 feet are allowable if a dividing berm or structure is used
Side Slopes	3:1 or flatter
Longitudinal Slope	1.0% minimum, 4.0% maximum
Flow Depth and Capacity	4 inch for water quality treatment
Flow Velocity	1.0 fps for water quality treatment, 4.0 to 5.0 fps for 2 year storm, 7.0 fps for 10-year storm
Length	Length necessary for 10-minute residence time

Figure C-5: Schematic of a Grassed Channel (Vermont Agency of Natural Resources, 2002)

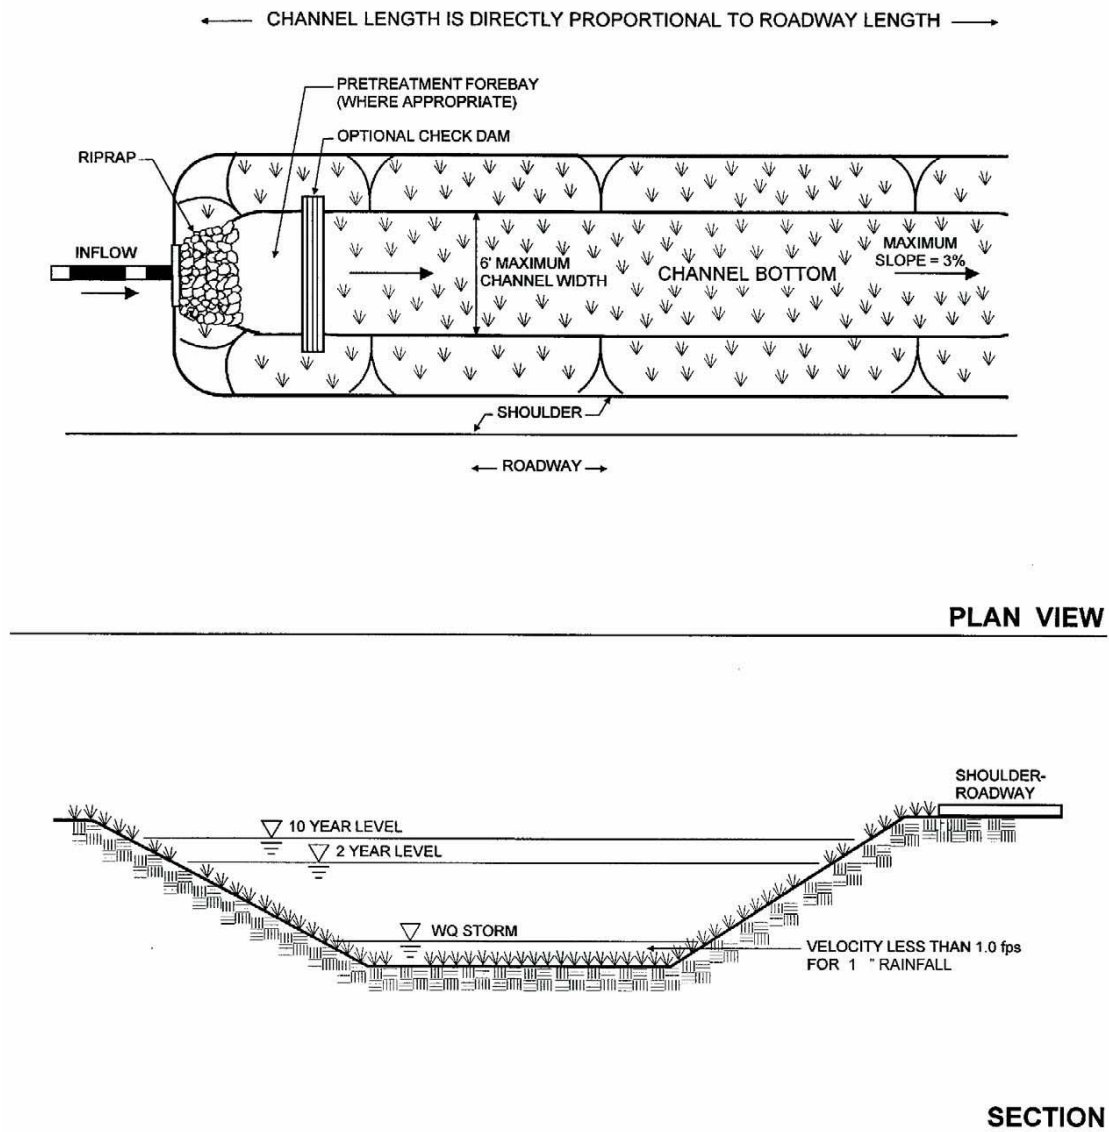


Grass channels should be inspected on an annual basis and just after storms of greater than or equal to the water quality storm event. Both the structural and vegetative components should be inspected and repaired. When sediment accumulates to a depth of approximately 3 inches, it should be removed, and the swale should be reconfigured to its original dimensions. The grass in the channel should be mowed at least 4 times during the growing season. If the surface of the grass channel becomes clogged to the point that standing water is observed on the surface 48 hours after precipitation events, the bottom should be roto-tilled or cultivated to break up any hard-packed sediment, and then reseeded. Trash and debris should be removed and properly disposed of.

6. Oil/Grit Separator

Oil/grit separators are pollution prevention devices that remove oil and sediment from stormwater runoff and store them for safe and easy removal. They operate by employing various physical or chemical separation methods, including gravity separation, filters, coagulation/flocculation, and flotation. Typically, these devices contain a series of chambers which serve to first trap floatables, and then employ gravity settling of sediment. Oil and grease float to the top of a permanent pool of water, and ultimately get trapped in the second (separation) chamber. It is recommended that this practice is a bypass structure. Storms that exceed the design capacity are bypassed by the structure, minimizing the potential for resuspension of previously settled materials. Figure C-6 below is an illustration of an oil/grit separator.

The estimated capital costs for these technologies vary and depend on the design capacity. Smaller units that are sized under 200 cubic feet will cost just under \$10,000, while larger units sized over 1,500 cubic feet can cost up to \$80,000.

Figure C-6: Schematic of an Oil/Grit Separator

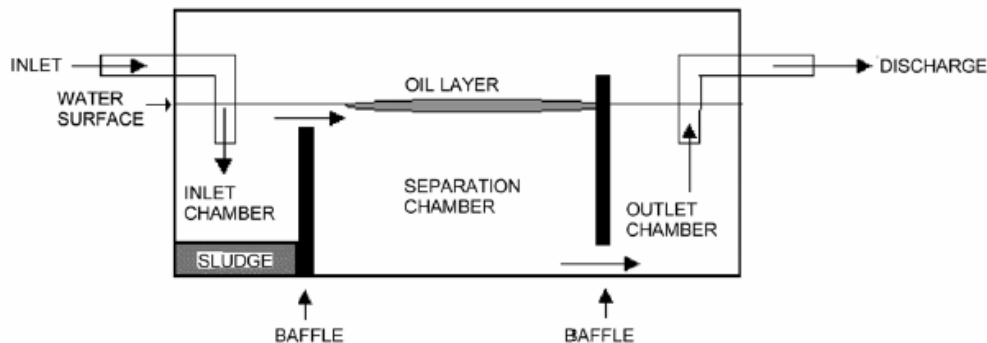

Maintenance burdens for these units are heavy and represent one of the larger drawbacks to their application. Another limitation of these practices is their reported inability to remove bacteria and nutrients. Because of this limitation, the devices are only specified where no other BMP is feasible. Regular inspection, ranging from monthly to quarterly, is required with routine removal of sand and oil. Further unplanned pump-outs are required in the event of a large contaminant spill. Removal and disposal of sand and oil generally costs approximately \$400 per cleanout.

Cleanout is required once the stored volume reaches 15% of the device's capacity, or immediately in the event of a spill. Maintenance intervals vary depending on the application, but are recommended quarterly for the first year. Oils and sediments can be removed via accessible pipes and inspection ports.

7. Sediment Forebay

A sediment forebay is an excavated pit designed to slow incoming stormwater runoff and settle suspended solids. It is primarily used to pretreat stormwater before continuing to the primary water quality and quantity control BMP, typically stormwater basins and wetlands. Frequent cleaning and inspection is essential to the effectiveness of this BMP. Sediment forebays rely primarily on settling for pollutant removal. Pollutants are only removed when the sediments forebays are cleaned out.

The design criteria for sediment forebays should incorporate design features to make maintenance accessible and easy. They should not be any deeper than 3 to 6 feet with side slopes not steeper than 3:1. A sediment depth marker makes inspection simple and identifies when sediment removal is due.

Sediment forebays usually are incorporated into stormwater wetland costs. For this project, sediment forebays were proposed for pretreatment of stormwater prior to existing wetlands. The general cost would be similar to stormwater wetlands minus any planting costs, however for the purpose of this report and maintaining a conservative cost estimate, sediment forebays were estimated with the same costs as for constructed wetlands. This includes costs for clearing and grubbing, erosion and sediment control, excavating, grading, and staking. Typical unit base costs for stormwater wetlands range from \$1.20 to \$2.50 per cubic foot (CWP, 1998). Maintenance costs for wetlands are estimated at 2% per year of the construction costs (CWP, 1998).

Maintenance is essential for proper operation of sediment forebays. Sediment forebays require routine sediment removal annually.

APPENDIX D

Selected BMP Sites

D-1	Subwatershed H-5
D-2	Subwatershed H-7
D-3	Subwatershed H-9
D-4	Subwatershed H-14
D-5	Subwatershed H-18
D-6	Subwatershed H-22A
D-7	Subwatershed H-22B

APPENDIX D-1
Subwatershed H-5


Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

-
1. Site Number: H-5
-
2. Location (Address and/or Parcel ID) End of Laurel Avenue
-
3. Description (preliminary assessment of most likely retrofit-quality, quantity, or both):
Retrofit for water quality and channel erosion protection; existing conditions include untreated runoff to poorly flushed embayment and erosion gully.
-
4. Unique elements of retrofit (e.g., method of conveyance or stormwater diversion):
Water quality swale and bioretention system
-
5. Date of Preliminary Survey: 9/12/05
-
6. Property Ownership (public or private): Public Roadway / Residential
-
7. Drainage Area: 0.71 acres
-
8. Approximate imperviousness (%): 63%
-
9. Adjacent Land Use (Possible conflicts): Private property, existing mature trees, shoreline used as landing for fishing and kayaks.
-
10. Conflicts with Existing Utilities: None visible, all underground electric
-
11. Construction and Maintenance Access:
Excellent
-
12. Wetlands Present? ☐ Yes ☒ No
If yes, describe: However, near existing shoreline
-
13. Retrofit Volume Computations: 90% Rule: $WQV = [(P) (R_v) (A)] / 12$
 $R_v = 0.05 + 0.009(I)$
 $WQV = [(P) (0.05 + 0.009(I)) (A)] / 12$
 $WQV = [(1.2'') (0.05 + 0.009(63))(0.71)] / 12$
 $WQV = 0.04 \text{ acre-ft} \cong 1,908 \text{ cf}$
-

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

14. Photo # H5-1 – H5-5

15. Additional Notes and/or Sketch Information:

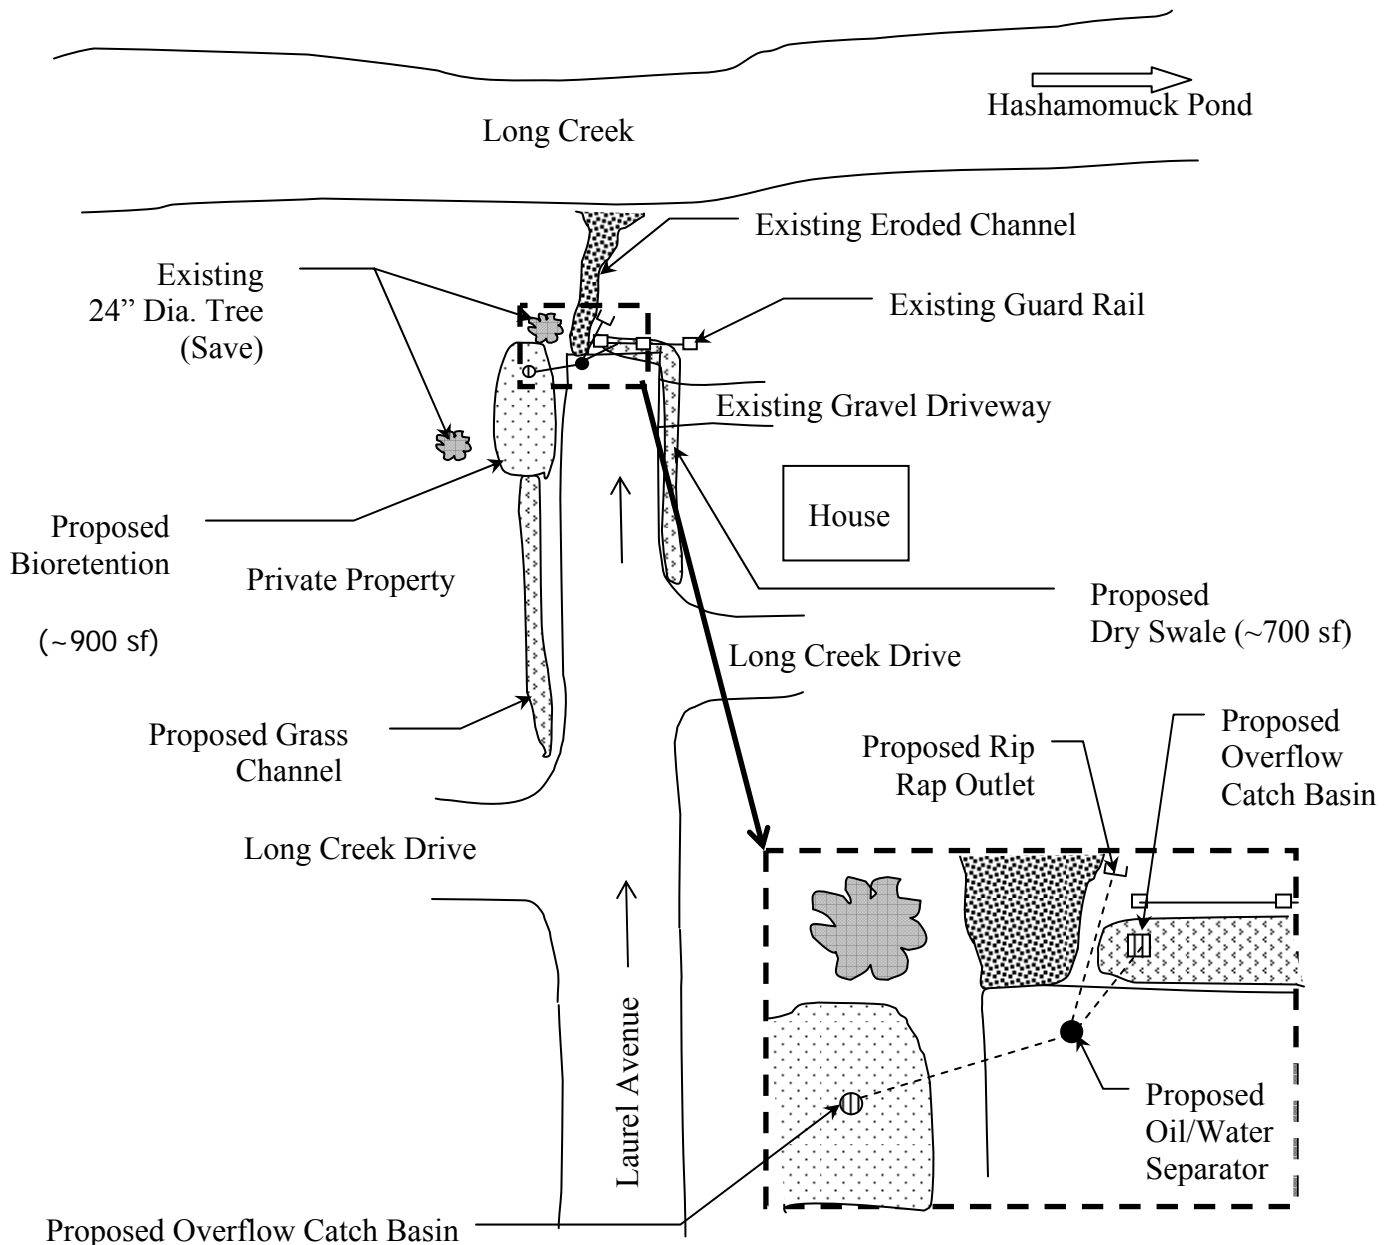

*Note: Half of the roadway runoff will drain to a water quality swale and be treated in the proposed Bioretention, the other half of the roadway will drain to a proposed dry swale. The overflow from both BMPs will overflow to a proposed Oil/Water separator and will be discharged to Long Creek.


16. Site Candidate for Further Investigation:

☒ Yes

☐ No

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

15. Additional Notes and/or Sketch Information: **Alternative**

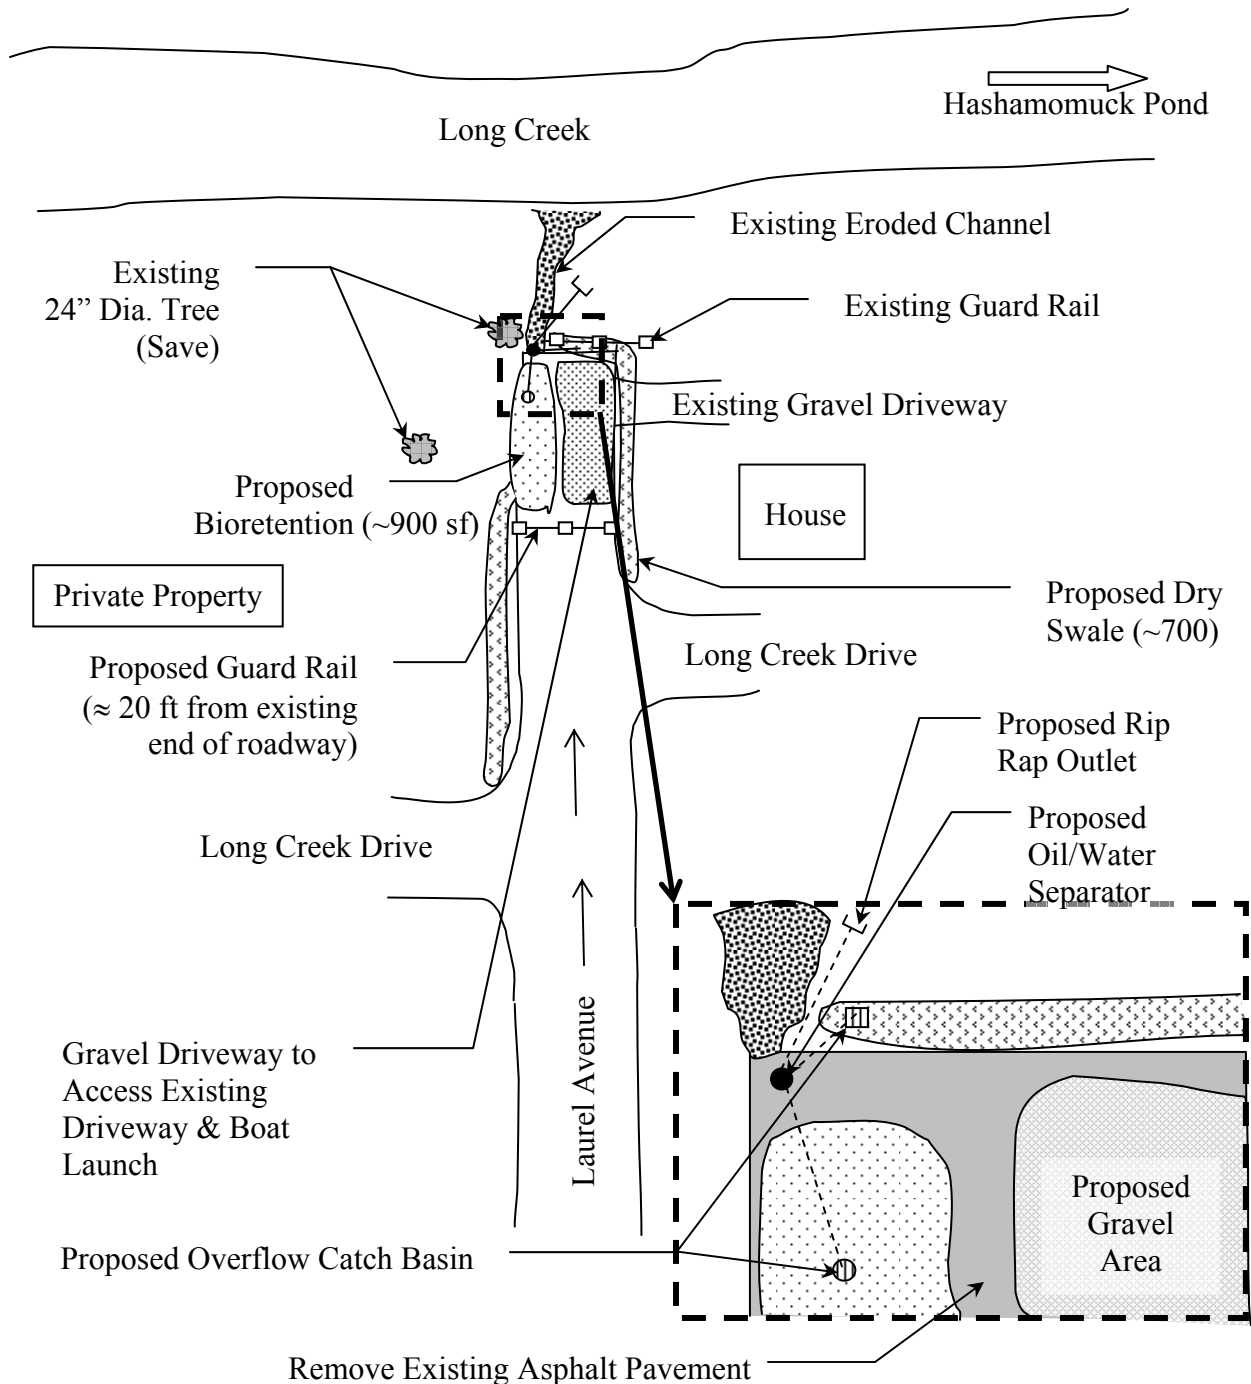

*Note: Half of the roadway runoff will drain to a water quality swale and be treated in the proposed Bioretention, the other half of the roadway will drain to a proposed dry swale. The overflow from both BMPs will overflow to a proposed Oil/Water separator and will be discharged to Long Creek.





16. Site Candidate for Further Investigation:


☒ Yes

☐ No




Legend

-  Proposed BMP Drainage Areas
-  Bioretention
-  Dry Swales
-  Grass Channel

-  Infiltration Catch Basin
- H-5**

 Site Location

* Source: Aerial Photo, NYS Office of Cyber Security & Critical Infrastructure Coordination, Spring 2004



Horsley Witten Group
phone: 508-833-6600
www.horsleywitten.com

Best Mangement Practices (BMP) Sites
Hashamomuck Pond Watershed
Town of Southold

7/19/06 EC
J:\4094 Peconic Bay Estuary\GIS\BMP_Sites\
H-5.mxd

Figure D-1

Hashamomuck Pond



H-5 Eroded Gully



H-5 Northeast Corner of Laurel Avenue



H-5 West Side of Laurel Avenue (Proposed
Bioretention Location)



H-5 Northwest Corner of Laurel Avenue



H-5 West Side of Laurel Avenue (Proposed
Bioretention Location)


APPENDIX D-2
Subwatershed H-7

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

-
1. Site Number: H-7
2. Location (Address and/or Parcel ID) Long Creek Drive
3. Description (preliminary assessment of most likely retrofit-quality, quantity, or both):
Retrofit for water quality and channel protection; existing conditions include untreated runoff collecting into a catch basin, which over tops the rim due to a clogged outlet pipe and overland flows down an eroded gully.
4. Unique elements of retrofit (e.g., method of conveyance or stormwater diversion):
Bioretention with vegetated swales along both sides of roadway
-
5. Date of Preliminary Survey: 9/15/05
6. Property Ownership (public or private): Private except R.O.W.
7. Drainage Area: 6.1 acres
8. Approximate imperviousness (%): 23%
9. Adjacent Land Use (Possible conflicts): Private property easement required.
-
10. Conflicts with Existing Utilities: Water main near existing catch basin. Overhead power line on the other side of roadway. Existing large (2 ft dia.) trees nearby.
-
11. Construction and Maintenance Access:
Good
-
12. Wetlands Present? ☒ Yes ☐ No
If yes, describe: Down stream from the eroded gully and bordering the pond is some wetland plants.
-
13. Retrofit Volume Computations: 90% Rule: $WQV = [(P) (R_v) (A)] / 12$
 $R_v = 0.05 + 0.009(I)$
 $WQV = [(P) (0.05 + 0.009(I)) (A)] / 12$
 $WQV = [(1.2") (0.05 + 0.009(23)) (6.1)] / 12$
 $WQV = 0.16 \text{ acre-ft} \cong 6818 \text{ cf}$
-
14. Photo # H7-1 – H7-5

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

15. Additional Notes and/or Sketch Information:

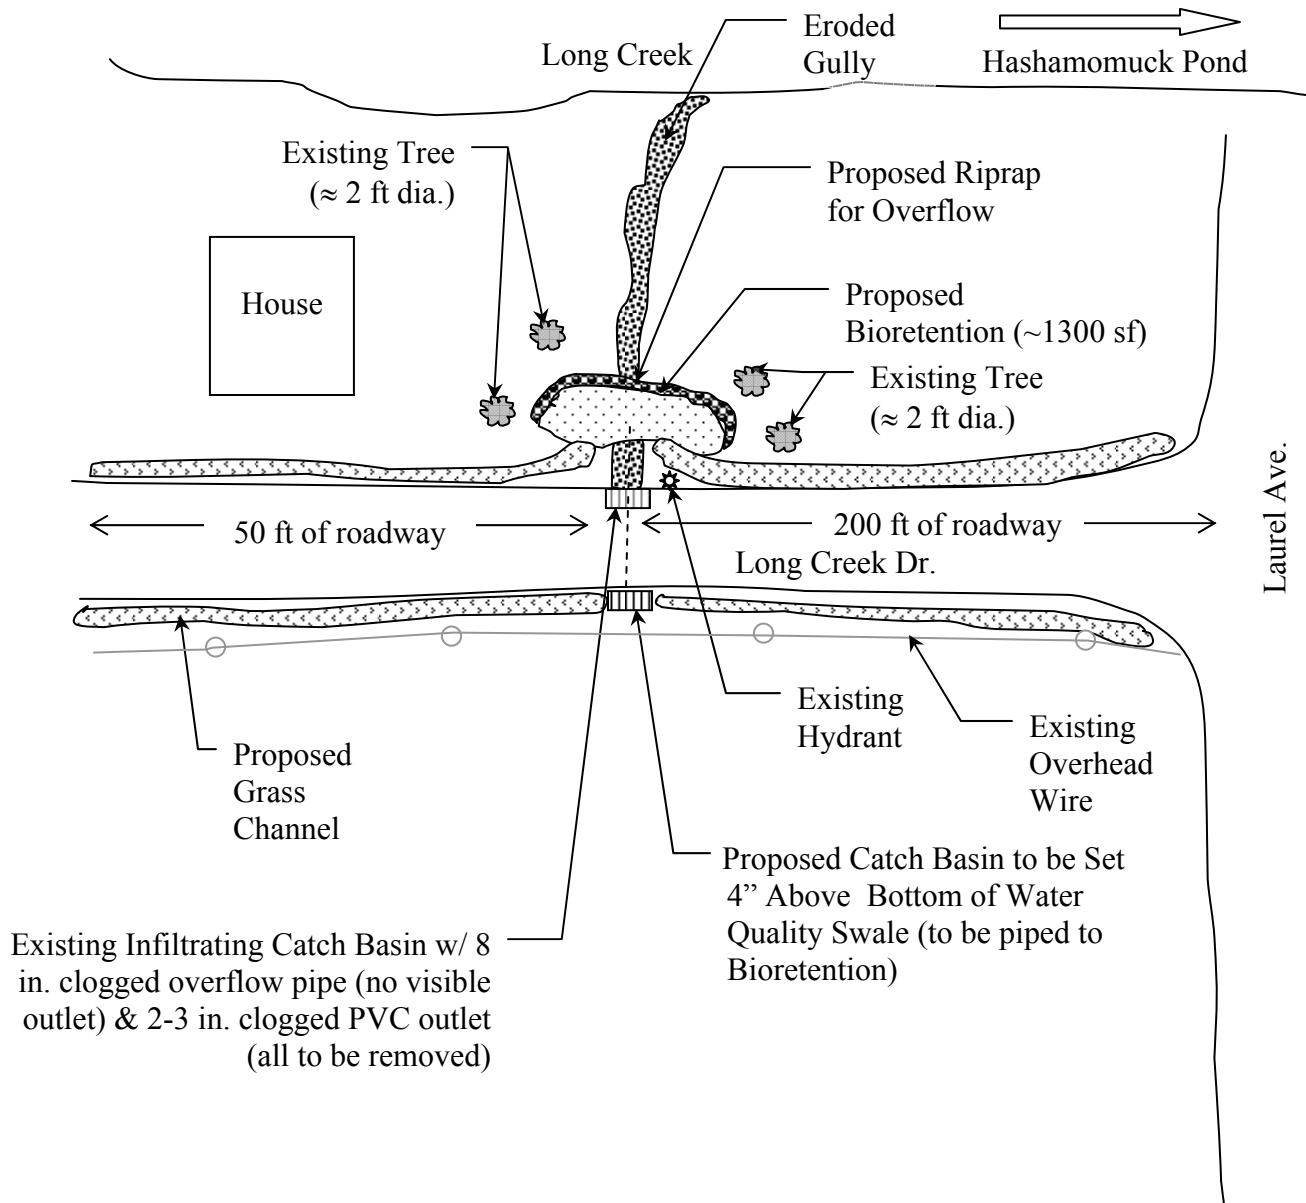

*Note: Construct dry swales along both sides of the road to pretreat the runoff prior to being discharged into a bioretention. Due to site constraints (existing large trees), the bioretention will have to be online. Riprap is proposed at an overflow weir for storms greater than the first flush. Remove the existing catch basin and all appurtenance.

16. Site Candidate for Further Investigation:

☒ Yes

☐ No

Hashamomuck Pond



H-7 Outlet



H-7 Long Creek Dr. (West)




H-7 Infiltrating Catch Basin Inlet



H-7 Long Creek Dr. (North)



H-7 Long Creek Dr. (East)

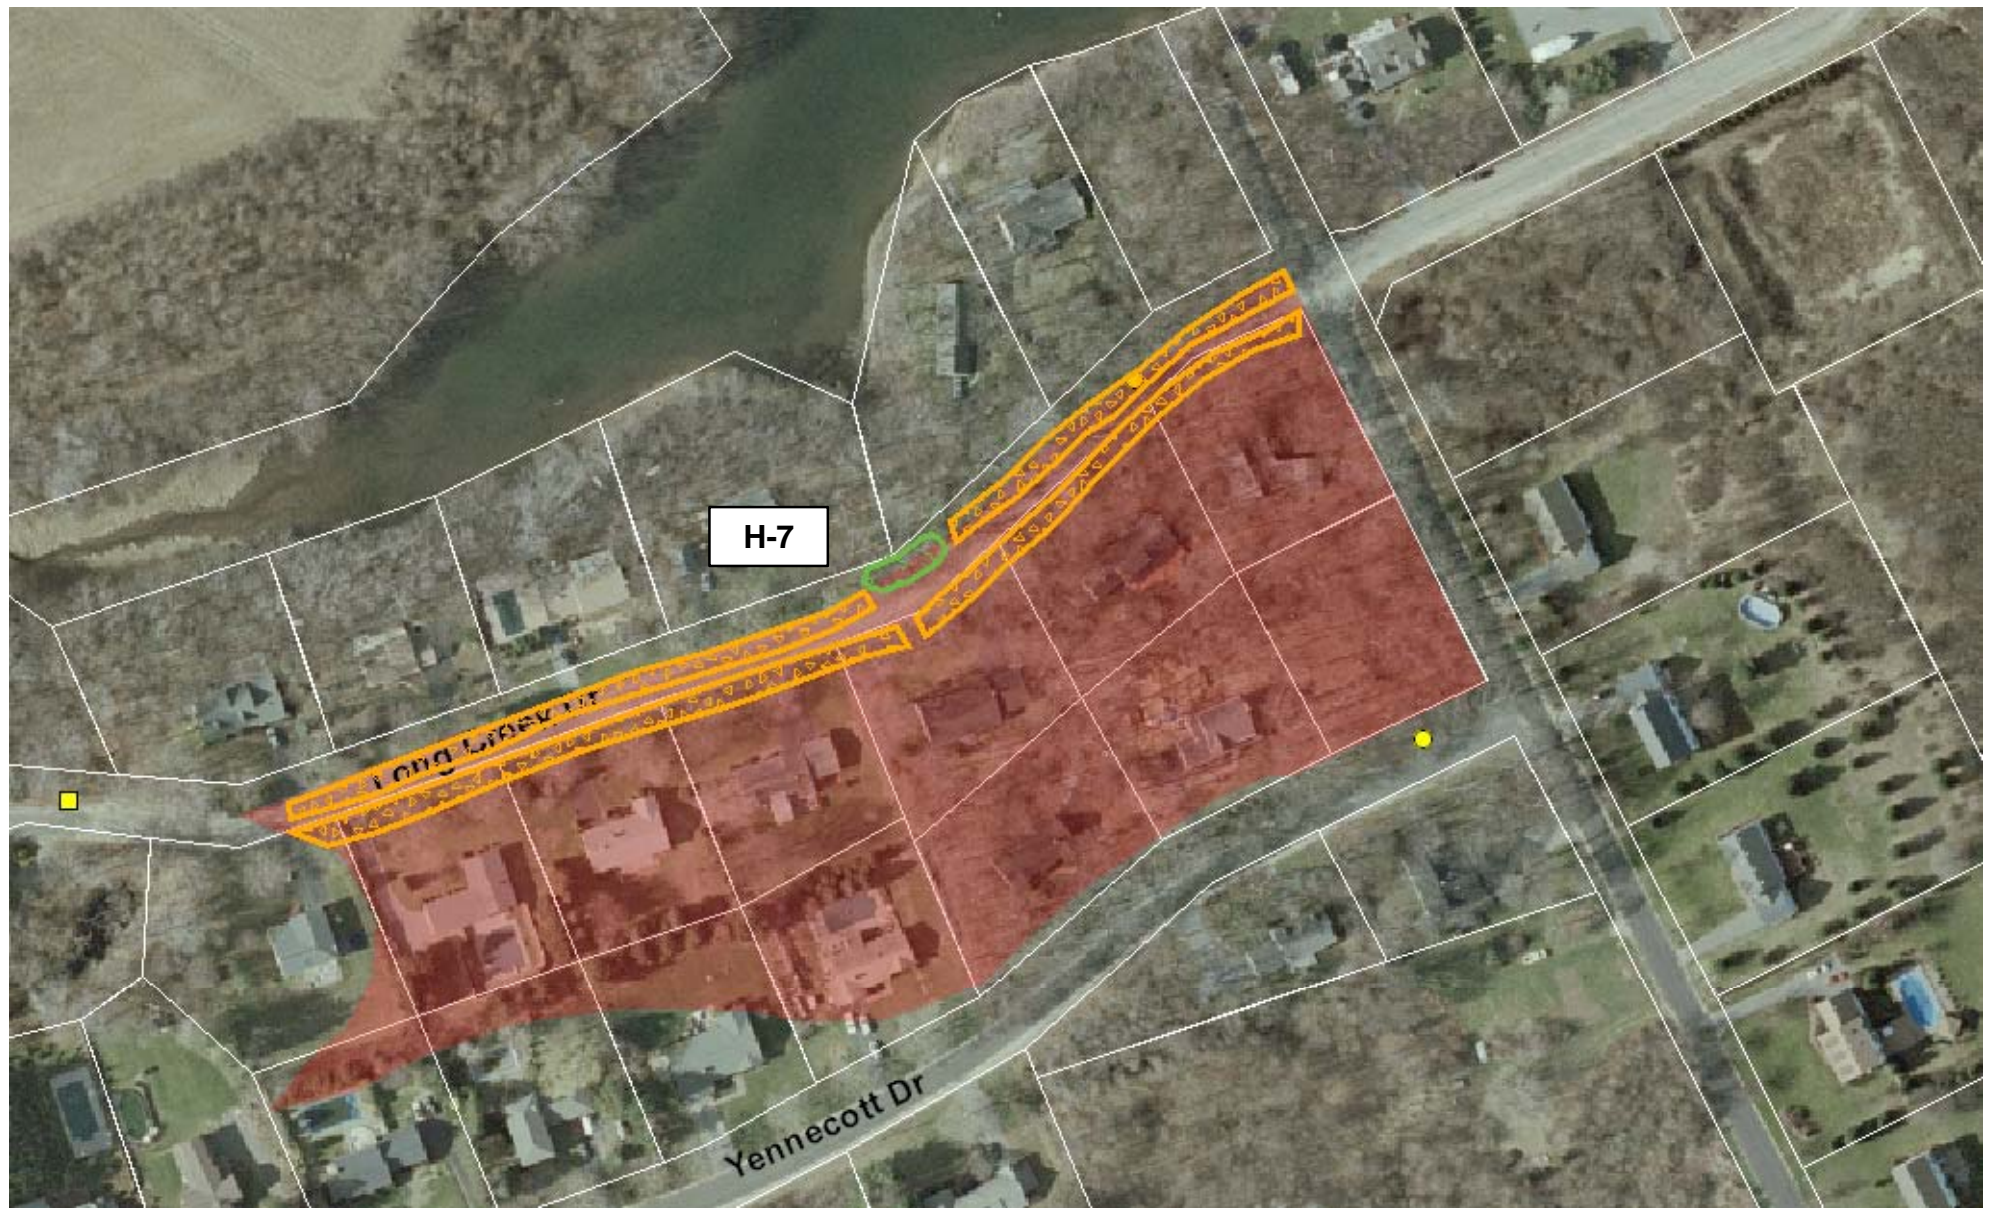


Legend

- Proposed BMP Drainage Areas
- Bioretention
- Grass Channel

- Infiltration Catch Basin
- Outlet Catchbasin
- H-7 Site Location

* Source: Aerial Photo, NYS Office of Cyber Security & Critical Infrastructure Coordination, Spring 2004



Horsley Witten Group
phone: 508-833-6600
www.horsleywitten.com

Best Mangement Practices (BMP) Sites
Hashamomuck Pond Watershed
Town of Southold

7/19/06 EC
J:\4094 Peconic Bay Estuary\GIS\BMP_Sites\
H-7.mxd

Figure D-2

APPENDIX D-3
Subwatershed H-9


Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

1. Site Number: H-9
2. Location (Address and/or Parcel ID) Long Creek Dr.
3. Description (preliminary assessment of most likely retrofit-quality, quantity, or both):
Existing detention pond with working overflow. Catch basin and sediment forebay for limited roadway area. Aesthetics and water quality of groundwater in detention pond seems to be the issue.
4. Unique elements of retrofit (e.g., method of conveyance or stormwater diversion):
Tree pruning over the pond area to increase light to pond surface. Signs for pet owners to pick up after their pets; and wetland planting zones, forebay to pond, and replace outlet structure.
5. Date of Preliminary Survey: 9/12/05
6. Property Ownership (public or private): Private
7. Drainage Area: 0.23 acres
8. Approximate imperviousness (%): 70%
9. Adjacent Land Use (Possible conflicts): Private land, however owner seems eager to help with restoration.
10. Conflicts with Existing Utilities: Overhead power lines, underground water main.
11. Construction and Maintenance Access:
Good
12. Wetlands Present? ☒ Yes ☐ No
If yes, describe: Intermittent channel to existing detention pond with ground water influence.
13. Retrofit Volume Computations: The detention pond seems to be the right size.
90% Rule: $WQV = [(P) (R_v) (A)] / 12$
 $R_v = 0.05 + 0.009(I)$
 $WQV = [(P) (0.05 + 0.009(I)) (A)] / 12$
 $WQV = [(1.2") (0.05 + 0.009(70)) (0.23)] / 12$
 $WQV = 0.02 \text{ acre-ft} \cong 681 \text{ cf}$

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

14. Photo # H9-1 – H9-7

15. Additional Notes and/or Sketch Information

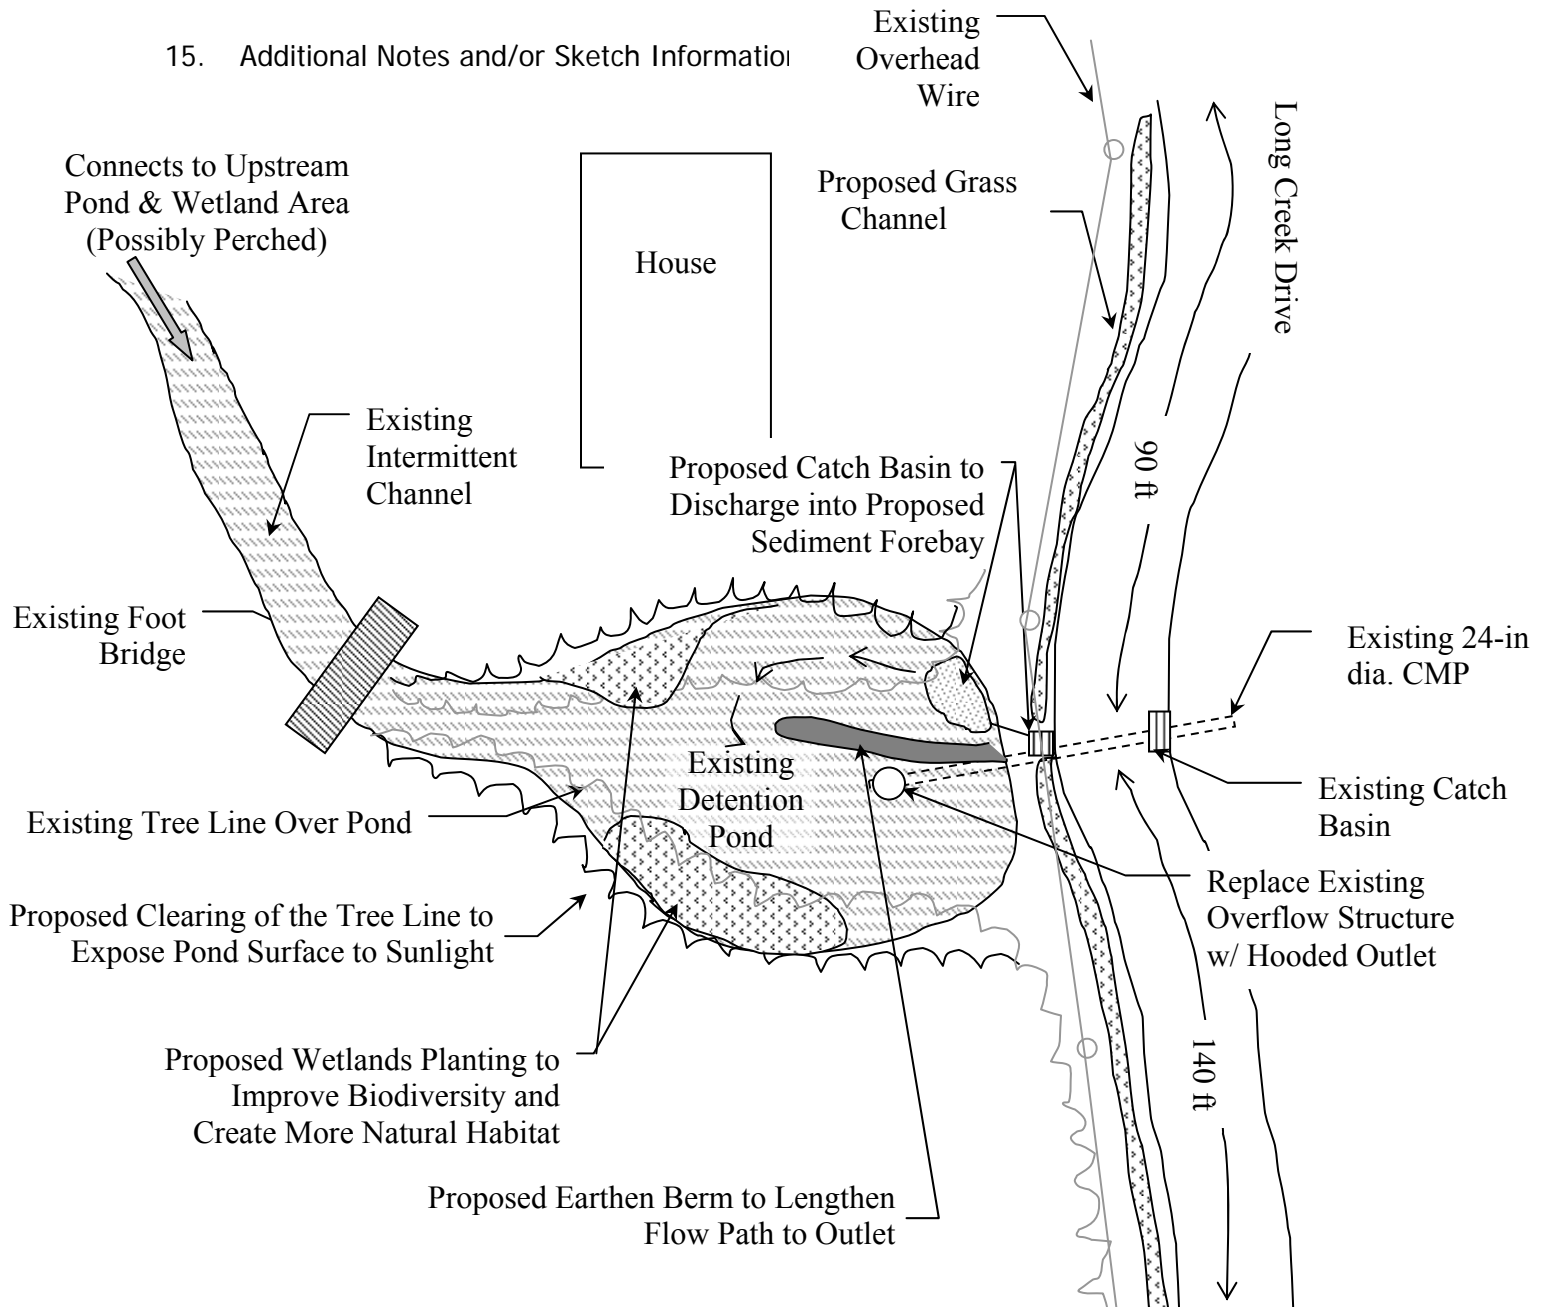

* Note: Degraded, standing water, probably in groundwater table. Neighbor notes that it gets significant flow during storms but does not look like it ever gets too high. A proposed sediment forebay is recommended to settle out particles from the runoff from the section of roadway. Construct an earthen berm to prevent short circuiting to outlet. Cutback existing tree line to expose pond surface to sunlight. Introduce new wetland plants to improve biodiversity. Replace existing overflow structure with a hooded outlet

16. Site Candidate for Further Investigation:

☐ Yes

☐ No




Legend

- Proposed BMP Drainage Areas
- Sediment Forebay
- Grass Channel

- Outlet Catchbasin
- Infiltration Catch Basin
- H-9 Site Location

* Source: Aerial Photo, NYS Office of Cyber Security & Critical Infrastructure Coordination, Spring 2004



Horsley Witten Group
phone: 508-833-6600
www.horsleywitten.com

Best Management Practices (BMP) Sites
Hashamomuck Pond Watershed
Town of Southold

7/19/06 EC
J:\4094 Peconic Bay Estuary\GIS\BMP_Sites\
H-9.mxd

Figure D-3


Hashamomuck Pond



H-9 Outlet




H-9 Long Creek Dr. (West)

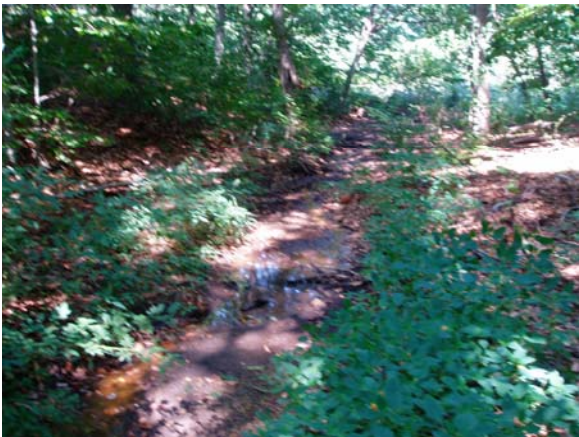

H-9 Eroded Gully



H-9 Long Creek Dr. (East)

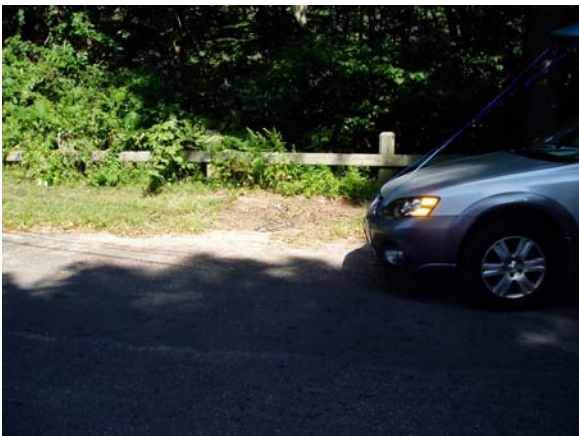

H-9 Long Creek Drive (Catch Basin)



H-9 Existing Pond

Hashamomuck Pond



H-9 Existing Pond Outlet



H-9 Yennocott Dr. (Catch Basin Inlet)



H-9 Yennocott Dr. (Park)



H-9 Yennocott Dr. (Existing Pond)



H-9 Yennocott Dr. (East)



H-9 Yennocott Dr. (North)


APPENDIX D-4
Subwatershed H-14

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

-
1. Site Number: H-14
2. Location (Address and/or Parcel ID) Dons Way
3. Description (preliminary assessment of most likely retrofit-quality, quantity, or both):
Retrofit for water quality.
-
4. Unique elements of retrofit (e.g., method of conveyance or stormwater diversion):
Grass channel along both sides of the roadway. New pavement may be required to direct flows accordingly. Bioretention at the end of the association for treatment prior to being discharged into Hashamomuck Pond
-
5. Date of Preliminary Survey: 9/13/05
6. Property Ownership (public or private): Private
7. Drainage Area: 0.2 acre
8. Approximate imperviousness (%): 100%
9. Adjacent Land Use (Possible conflicts): At the end of the association there are two very large trees.
-
10. Conflicts with Existing Utilities: None observed
-
11. Construction and Maintenance Access:
Excellent
-
12. Wetlands Present? ☒ Yes ☐ No
If yes, describe: At the shore of Hashamomuck Pond there is some wetland plants and a salt marsh.
-
13. Retrofit Volume Computations: 90% Rule: $WQV = [(P) (Rv) (A)] / 12$
 $Rv = 0.05 + 0.009(I)$
 $WQV = [(P) (0.05 + 0.009(I)) (A)] / 12$
 $WQV = [(1.2) (0.05 + 0.009(100)) (0.2)] / 12$
 $WQV = 0.02 \text{ acre-ft} \approx 621 \text{ cf}$
-
14. Photo # H14-NSA
-

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

15. Additional Notes and/or Sketch Information:

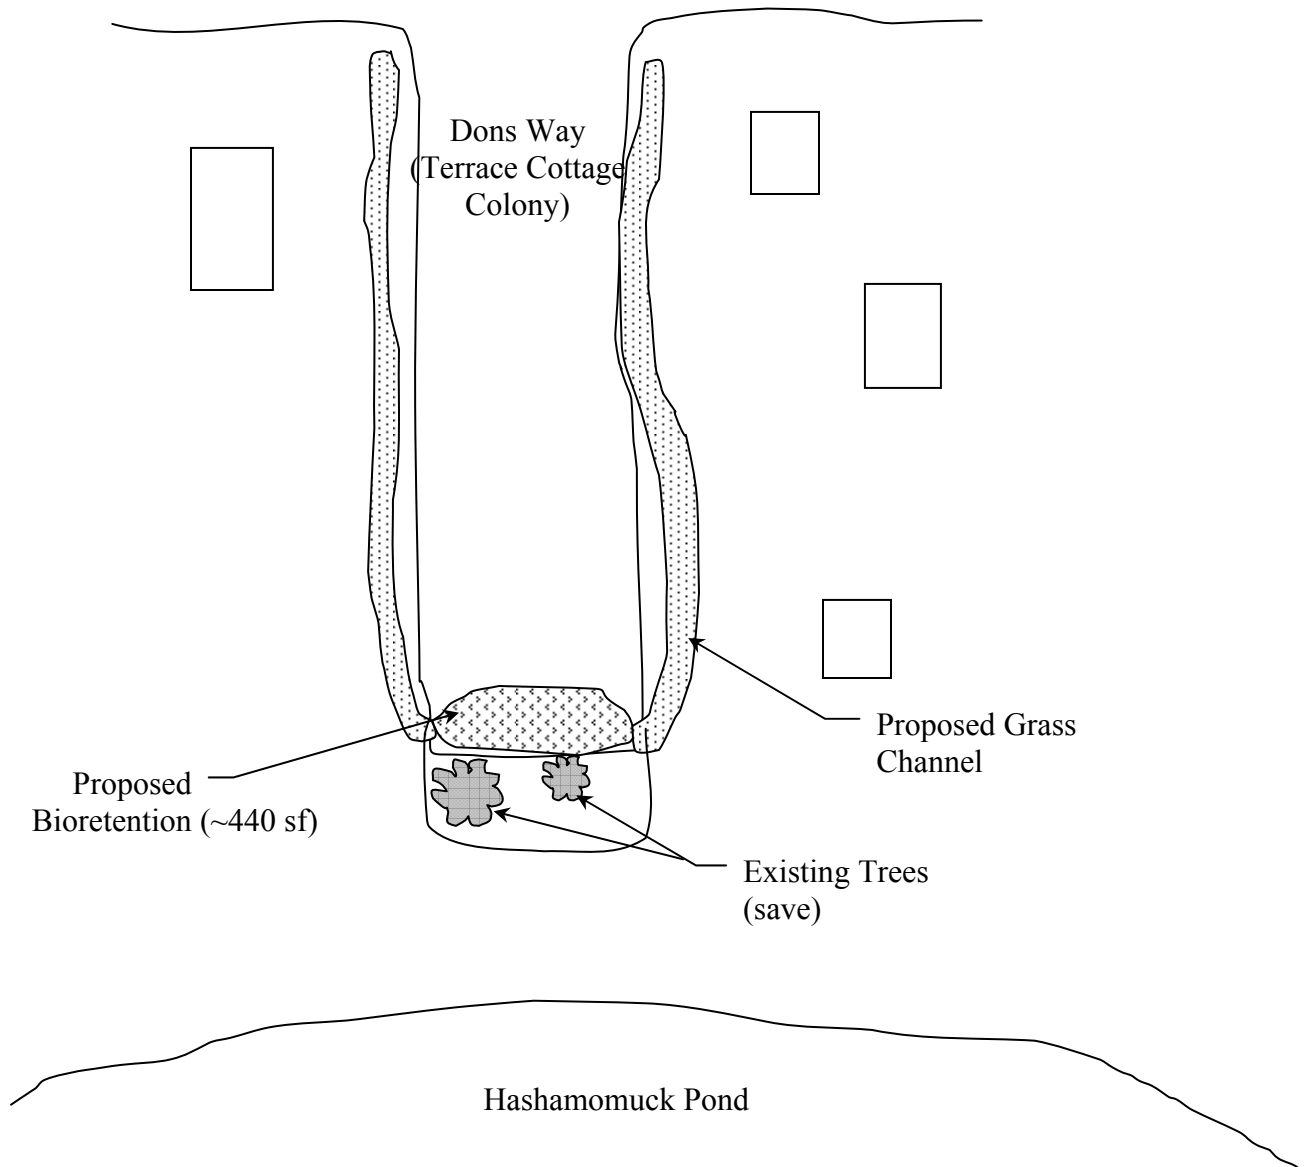

16. Site Candidate for Further Investigation:

☒ Yes

☐ No



Legend



Proposed BMP Drainage Areas



Grass Channels



Bioretention



Infiltration Catch Basin

H-14

Site Location

* Source: Aerial Photo, NYS Office of Cyber Security & Critical Infrastructure Coordination, Spring 2004



75 Feet

Horsley Witten Group
phone: 508-833-6600
www.horsleywitten.com

Best Management Practices (BMP) Sites
Hashamomuck Pond Watershed
Town of Southold

7/11/06 EC
J:\4094 Peconic Bay Estuary\GIS\BMP_Sites\
H-14.mxd

Figure D-4

APPENDIX D-5
Subwatershed H-18


Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

1. Site Number: H-18
2. Location (Address and/or Parcel ID) Bayview Avenue
3. Description (preliminary assessment of most likely retrofit-quality, quantity, or both):
Retrofit for quality
4. Unique elements of retrofit (e.g., method of conveyance or stormwater diversion):
There is an existing leaching pit with 3'x3' grate. Propose water quality swales on both sides of the roadway and overflow into existing leaching pit.
5. Date of Preliminary Survey: 9/12/05
6. Property Ownership (public or private): Private with existing drainage easement
7. Drainage Area: 2.3 acres
8. Approximate imperviousness (%): 26%
9. Adjacent Land Use (Possible conflicts): None
10. Conflicts with Existing Utilities: Existing sewer, overhead electric, private property
11. Construction and Maintenance Access:
Excellent
12. Wetlands Present? ☐ Yes ☒ No
If yes, describe: _____
13. Retrofit Volume Computations: 90% Rule: $WQV = [(P) (R_v) (A)] / 12$
 $R_v = 0.05 + 0.009(I)$
 $WQV = [(P) (0.05 + 0.009(I)) (A)] / 12$
 $WQV = [(1.2") (0.05 + 0.009(26)) (2.3)] / 12$
 $WQV = 0.07 \text{ acre-ft} \cong 2,808 \text{ cf}$

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

14. Photo # H18

15. Additional Notes and/or Sketch Information:

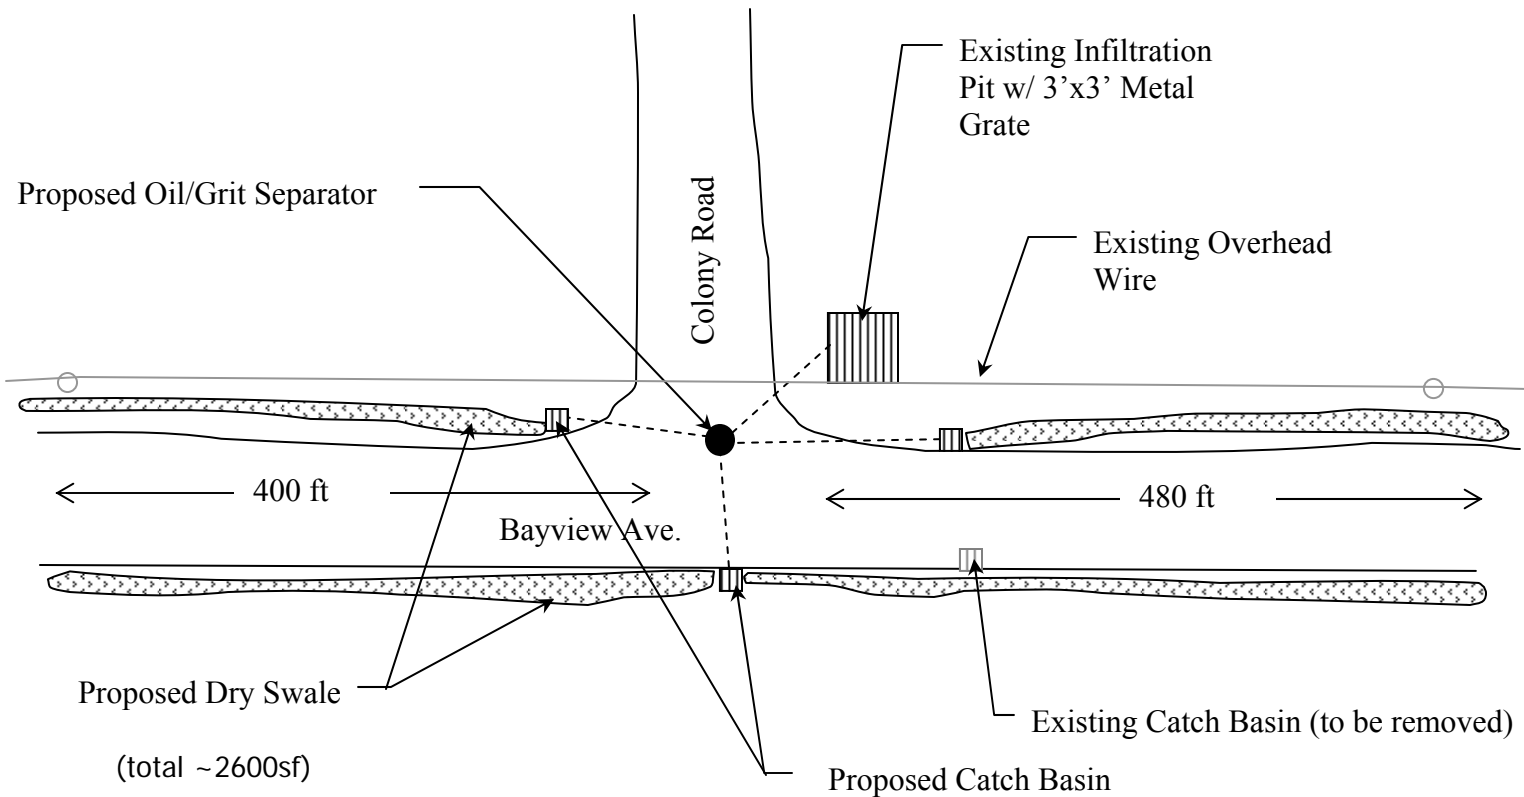

*Note: Construct dry swales to pretreat roadway drainage, provide culvert at driveway crossings to convey flows to overflow catch basins. All flow will be collected at an oil/grit separator manhole prior to discharge in the existing infiltration pit.







16. Site Candidate for Further Investigation:

☒ Yes


☐ No



Legend

- | | | | |
|---|-------------------------------|---|--------------------------|
|  | Proposed BMP Drainage Areas |  | Outfalls |
|  | Dry Swales |  | Infiltration Catch Basin |
|  | Stormdrain Conveyance Systems |  | Site Location |

* Source: Aerial Photo, NYS Office of Cyber Security & Critical Infrastructure Coordination, Spring 2004



Horsley Witten Group
phone: 508-833-6600
www.horsleywitten.com

Best Management Practices (BMP) Sites
Hashamomuck Pond Watershed
Town of Southold

7/11/06 EC
J:\4094 Peconic Bay Estuary\GIS\BMP_Sites\
H-18.mxd

Figure D-5

Hashamomuck Pond



H-18 Inlet Grate to Infiltration Pit

APPENDIX D-6
Subwatershed H-22A

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory


-
1. Site Number: H-22A
-
2. Location (Address and/or Parcel ID) Grove Road
-
3. Description (preliminary assessment of most likely retrofit-quality, quantity, or both):
Retrofit for water quality
-
4. Unique elements of retrofit (e.g., method of conveyance or stormwater diversion):
Micro-pool at outfall location with stone check dam. Micro-bioretenion
-
5. Date of Preliminary Survey: 9/12/05
-
6. Property Ownership (public or private): Public in R.O.W.
-
7. Drainage Area: 4.48 acres
-
8. Approximate imperviousness (%): 20.1%
-
9. Adjacent Land Use (Possible conflicts): Private Property
-
10. Conflicts with Existing Utilities: Overhead power lines, public water main.
-
11. Construction and Maintenance Access:
Good
-
12. Wetlands Present? ☒ Yes ☐ No
If yes, describe: Existing wet channel, that is tidally influenced at the outfall location.
-
13. Retrofit Volume Computations: 90% Rule: $WQV = [(P) (R_v) (A)] / 12$
 $R_v = 0.05 + 0.009(I)$
 $WQV = [(P) (0.05 + 0.009(I)) (A)] / 12$
 $WQV = [(1.2") (0.05 + 0.009(20)) (4.5)] / 12$
 $WQV = 0.1035 \text{ acre-ft} \cong 4500 \text{ cf}$
-

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

14. Photo # H22A-1 & H22A-2

15. Additional Notes and/or Sketch Information:

* Note: Alter existing vegetated channel to have a micropool to help settle out sediments and construct stone check dams to slow the flow down and prevent erosion. Construct a small scale bioretention system (Micro-Bioretention) with a stone curtain to settle out sediments prior to being treated in the filter media. The overflow will drain into the existing drainage network.

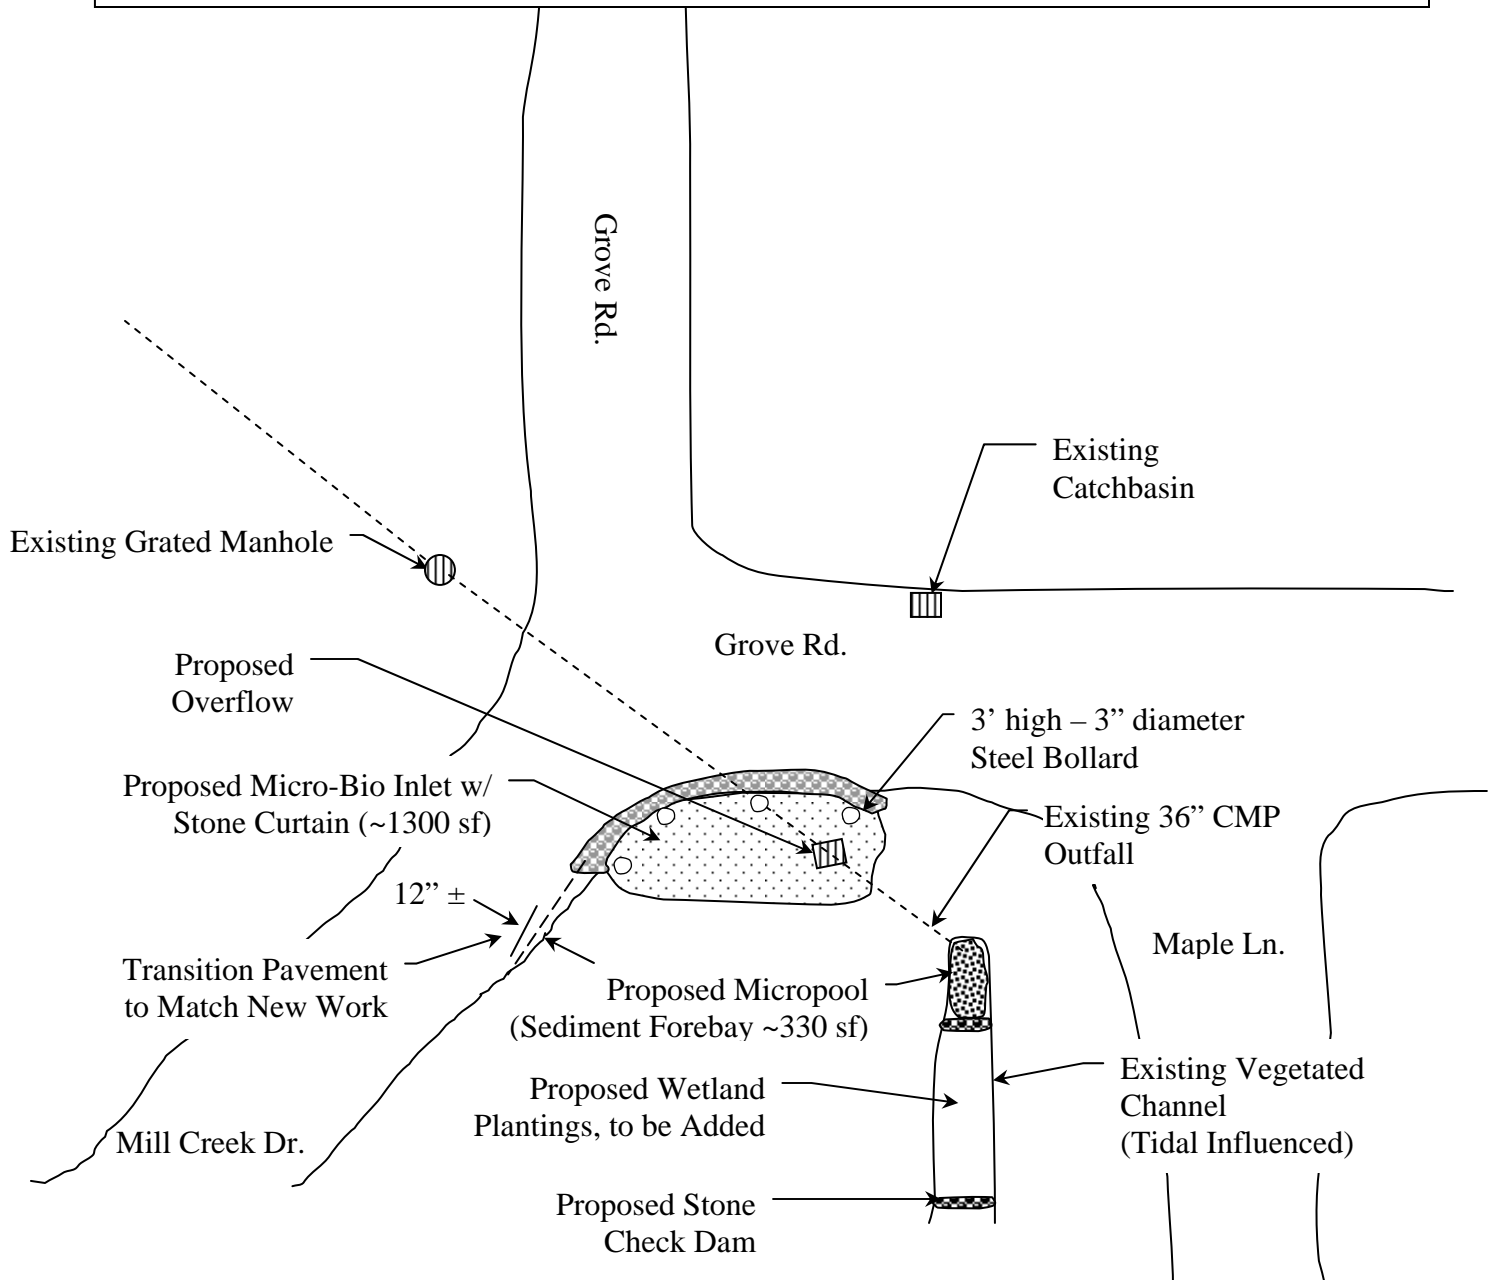

16. Site Candidate for Further Investigation:

☒ Yes

☐ No



Legend


- Proposed BMP Drainage Areas
- Micro-bio Inlet
- Sediment Forebay
- Stormdrain Conveyance Systems

- Outfalls
- Outlet Catchbasin
- Infiltration Catch Basin
- Drywells

* Source: Aerial Photo, NYS Office of Cyber Security & Critical Infrastructure Coordination, Spring 2004

H-22A

Site Location



Horsley Witten Group
phone: 508-833-6600
www.horsleywitten.com

Best Mangement Practices (BMP) Sites
Hashamomuck Pond Watershed
Town of Southold

7/11/06 EC
J:\4094 Peconic Bay Estuary\GIS\BMP_Sites\
H-22A.mxd

Figure D-6

Hashamomuck Pond



H-22A Existing Vegetated Channel
(Northwest)



H-22A Existing Vegetated Channel (South)

APPENDIX D-7

Subwatershed H-22B

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

1. Site Number: H-22B

2. Location (Address and/or Parcel ID) Grove Road

3. Description (preliminary assessment of most likely retrofit-quality, quantity, or both):
Retrofit fro water quality

4. Unique elements of retrofit (e.g., method of conveyance or stormwater diversion):
Dry swale along roadway. Conveyance system into existing infiltrating catch basin, overflow to an oil/water separator and discharge into Hashamomuck Pond.

5. Date of Preliminary Survey: 9/12/05

6. Property Ownership (public or private): Public in R.O.W.

7. Drainage Area: 1.3 acres

8. Approximate imperviousness (%): 25%

9. Adjacent Land Use (Possible conflicts): Private

10. Conflicts with Existing Utilities: Possible underground water main

11. Construction and Maintenance Access:
Good


12. Wetlands Present? ☐ Yes ☒ No
If yes, describe: _____

13. Retrofit Volume Computations: 90% Rule: $WQV = [(P) (Rv) (A)] / 12$
 $Rv = 0.05 + 0.009(I)$
 $WQV = [(P) (0.05 + 0.009(I)) (A)] / 12$
 $WQV = [(1.2") (0.05 + 0.009(25)) (1.3)] / 12$
 $WQV = 0.04 \text{ acre-ft} \cong 1,557 \text{ cf}$

Peconic Bay Estuary Stormwater Retrofit Reconnaissance Inventory

14. Photo # _____

15. Additional Notes and/or Sketch Information:

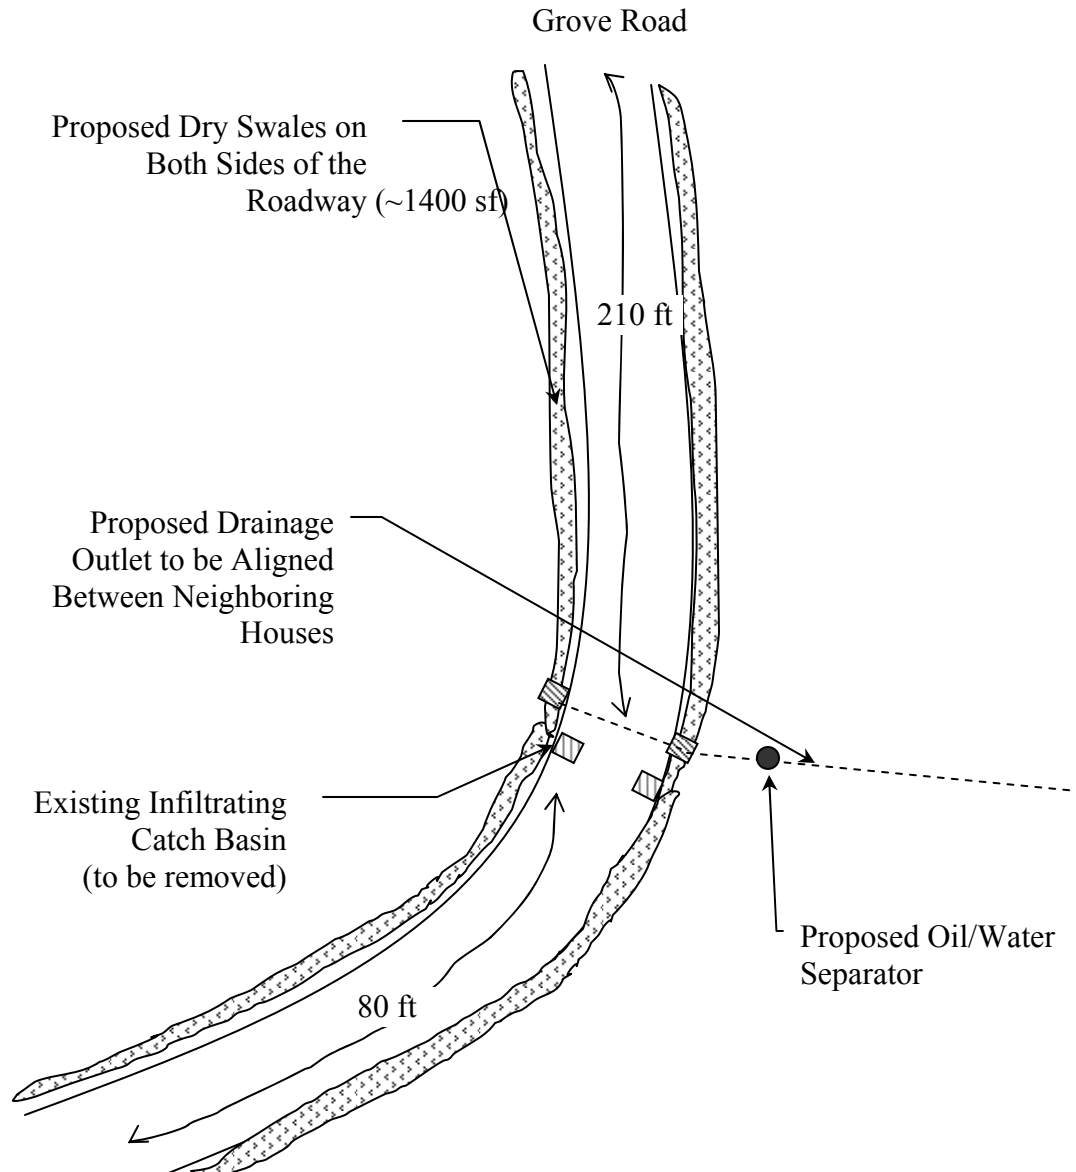

*Note: Proposed dry swales along both sides of roadway to pre-treat and convey runoff to an overflow grate. Provide culverts at driveway crossings to continue flow. The overflow grate is elevated 4-inch above the bottom of swale to promote infiltration of the first flush storm events. The overflow will be discharged directly into Hashamomuck Pond, this will help resolve some localized flooding during large storm events. Remove the existing infiltrating catch basins.

16. Site Candidate for Further Investigation:

☒ Yes

☐ No



Legend



Proposed BMP Drainage Areas



Dry Swales



Stormdrain Conveyance Systems



Outfalls



Outlet Catchbasin



Infiltration Catch Basin



Site Location

* Source: Aerial Photo, NYS Office of Cyber Security & Critical Infrastructure Coordination, Spring 2004



100

Feet

Horsley Witten Group

phone: 508-833-6600
www.horsleywitten.com



Best Mangement Practices (BMP) Sites
Hashamomuck Pond Watershed
Town of Southold

7/12/06 EC
J:\4094 Peconic Bay Estuary\GIS\BMP_Sites\
H-22B.mxd

Figure D-7

APPENDIX E

Unified Subwatershed and Site Reconnaissance

Watershed: Hashamomuck	Subwatershed: H-4	Unique Site ID: H-4				
Date: 09/ 13/ 05	Assessed By: T.W. & N.P.	Camera ID: Cannon				
Map Grid	Rain in Last 24 Hours <input type="checkbox"/> Y <input checked="" type="checkbox"/> N	Pic #				
A. Location						
A1. Street names or neighborhood surveyed: Drive Long Creek Drive & Park Avenue						
A2. Adjacent land use: <input checked="" type="checkbox"/> Residential <input type="checkbox"/> Commercial <input type="checkbox"/> Industrial <input type="checkbox"/> Institutional <input type="checkbox"/> Municipal <input type="checkbox"/> Transport-Related						
A3. Corresponding HSI or NSA field sheet? If so, circle HSI or NSA and record its Unique Site ID here <u>H-4</u>						
B. Street Conditions						
B1. Road Type: <input type="checkbox"/> Arterial <input type="checkbox"/> Collector <input checked="" type="checkbox"/> Local <input type="checkbox"/> Alley <input type="checkbox"/> Other: _____						
B2. Condition of Pavement: <input checked="" type="checkbox"/> New <input type="checkbox"/> Good <input type="checkbox"/> Cracked <input type="checkbox"/> Broken						
B3. Is on-street parking permitted <input checked="" type="checkbox"/> Y <input type="checkbox"/> N If yes, approximate number of cars per block: <u>0</u>						
B4. Are large cul-de-sacs present? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N						
B5. Is trash present in curb and gutter? If so, use the index to the right to record amount.	Index Rating for Accumulation in Gutters					
	Clean			Filthy		
	Sediment	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5
	Organic Material	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5
Litter	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	
C. Storm Drain Inlets and Catch Basins						
C1. Type of storm drain conveyance: <input checked="" type="checkbox"/> open <input type="checkbox"/> enclosed <input type="checkbox"/> mixed						
C2. Percentage of inlets with catch basin storage: <u>100%</u> <input type="checkbox"/> N/A (<i>only 1 CB in entire neighborhood</i>)						
Sample 1-2 catch basins per NSA/HSI	C3. Catch basin #1		C4. Catch basin #2			
Latitude	° ' "		° ' "			
Longitude	° ' "		° ' "			
LMK #						
Picture #	4					
Current Condition	<input type="checkbox"/> Wet <input checked="" type="checkbox"/> Dry		<input type="checkbox"/> Wet <input type="checkbox"/> Dry			
Condition of Inlet	<input checked="" type="checkbox"/> Clear <input type="checkbox"/> Obstructed		<input type="checkbox"/> Clear <input type="checkbox"/> Obstructed			
Litter Accumulation	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Organics Accumulation	<input checked="" type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Sediment Accumulation	<input checked="" type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Sediment Depth (in feet)	_____ ft.		_____ ft.			
Water Depth	<u>None</u> ft.		_____ ft.			
Evidence of oil and grease	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Sulfur smell	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Accessible to vacuum truck	<input checked="" type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
D. Non-Residential Parking Lot (>2 acres)						
D1. Approximate size: _____ acres						
D2. Lot Utilization: <input type="checkbox"/> Full <input type="checkbox"/> About half full <input type="checkbox"/> Empty						
D3. Overall condition of Pavement: <input type="checkbox"/> Smooth (no cracks) <input type="checkbox"/> Medium (few cracks) <input type="checkbox"/> Rough (many cracks) <input type="checkbox"/> Very Rough (numerous cracks and depressions)						
D4. Is lot served by a storm water treatment practice? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, describe: _____						
D5. On-site retrofit potential: <input type="checkbox"/> Excellent <input type="checkbox"/> Good <input type="checkbox"/> Poor						

E. Municipal Pollutant Reduction Strategies**E1.** Degree of pollutant accumulation in the system: ☐ High ☐ Medium ☐ Low ☐ None**E2.** Rate the feasibility of the following pollution prevention strategies:Street Sweeping: ☒ High ☐ Moderate ☐ LowStorm Drain Stenciling: ☐ High ☐ Moderate ☒ LowCatch Basin Clean-outs: ☒ High ☐ Moderate ☐ LowParking Lot Retrofit Potential: ☐ High ☐ Moderate ☒ Low**Catch Basin Sketches**

#1

#2

Notes:


Watershed: Hashomomuck		Subwatershed: H-9		Unique Site ID: H-9	
Date: 09/13/05		Assessed By: T.W. & N.P.		Camera ID: Cannon	
Map Grid:		Lat ____° ____' ____" Long ____° ____' ____"			Pic #: 9 & 10
Map Grid:					
Lat ____° ____' ____" Long ____° ____' ____"					
LMK #					
A. Parcel Description					
Size: <u>1</u> acre(s) Access to site (<i>check all that apply</i>): <input checked="" type="checkbox"/> Foot access <input checked="" type="checkbox"/> Vehicle access <input checked="" type="checkbox"/> Heavy equipment access					
Ownership: <input type="checkbox"/> Private <input type="checkbox"/> Public Current Management: <input type="checkbox"/> School <input type="checkbox"/> Park <input type="checkbox"/> Right-of-way <input type="checkbox"/> Vacant land					
<input type="checkbox"/> Other (please describe) _____					
Contact Information: _____					
Connected to other pervious area? <input checked="" type="checkbox"/> Y <input type="checkbox"/> N If yes, what type? <input type="checkbox"/> Forest <input checked="" type="checkbox"/> Wetland <input type="checkbox"/> Other _____					
Estimated size of connected pervious area: <u>50</u> acre(s) Record Unique Site ID of connected fragment: _____					
PART I. NATURAL AREA REMNANT					
FOREST			WETLAND		
B. Current Vegetative Cover			B. Current Vegetative Cover		
B1. Percent of forest with the following canopy coverage: Open ____% Partly shaded ____% Shaded ____% <i>*Note – these should total 100%</i> B2. Dominant tree species: _____ _____ B3. Understory species: _____ _____ B4. Are invasive species present? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Unknown If yes, % of forest with invasives: _____ Species: _____			B1. % of wetland with following vegetative zones: Aquatic: _____ Emergent: _____ Forested: _____ <i>*Note – these should total 100%</i> B2. Dominant species: _____ _____ B3. Are invasive species present? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Unknown If yes, % of wetland with invasives: _____ Species: _____		
C. Forest Impacts			C. Wetland Impacts		
C1. Observed Impacts (<i>check all that apply</i>): <input type="checkbox"/> Animals <input type="checkbox"/> Clearing/encroachment <input type="checkbox"/> Trash and dumping <input type="checkbox"/> Storm water runoff <input type="checkbox"/> Other			C1. Observed Impacts (<i>check all that apply</i>): <input type="checkbox"/> Animals <input type="checkbox"/> Clearing/encroachment <input type="checkbox"/> Trash and dumping <input type="checkbox"/> Storm water runoff <input type="checkbox"/> Hydrologic impacts <input type="checkbox"/> Other		
D. Notes			D. Notes		
E. Initial Recommendation					
<input type="checkbox"/> Good candidate for conservation/protection <input type="checkbox"/> Potential restoration candidate <input type="checkbox"/> Poor restoration or conservation candidate					

PART II. OPEN PERVIOUS AREAS**A. Current Vegetative Cover****A1.** Percent of assessed surface with:Turf 80 % Other Herbaceous 5 % None (bare soil) _____ % Trees 5 % Shrubs 10 % Other _____ % (please describe): _____**Note – these should total 100%***A2.** Turf: Height: ≤ 1 inches Apparent Mowing Frequency: ☒ Frequent ☐ Infrequent ☐ No-Mow ☐ Unknown
Condition (*check all that apply*): ☐ Thick/Dense ☐ Thin/Sparse ☐ Clumpy/Bunchy ☒ Continuous Cover**A3.** Thickness of organic matter at surface: _____ inches**A4.** Are invasive species present? ☐ Y ☐ N ☒ Unknown If yes, % of site with invasives: _____

Species: _____

B. Impacts**B1.** Observed Impacts (*check all that apply*): ☐ Soil Compaction ☐ Erosion ☐ Trash and Dumping
☐ Poor Vegetative Health ☐ Other (describe): _____**C. Reforestation Constraints****C1.** Sun exposure: ☒ Full sun ☐ Partial sun ☐ Shade ☐ Unknown**C2.** Nearby water source? ☒ Y ☐ N ☐ Unknown**C3.** Other constraints: ☒ Overhead wires ☒ Underground Utilities ☒ Pavement ☐ Buildings
☐ Other (please describe): _____**D. Notes****E. Initial Recommendation**

- ☒ Good candidate for natural regeneration
☒ May be reforested with minimal site preparation
☐ May be reforested with extensive site preparation
☐ Poor reforestation or regeneration site

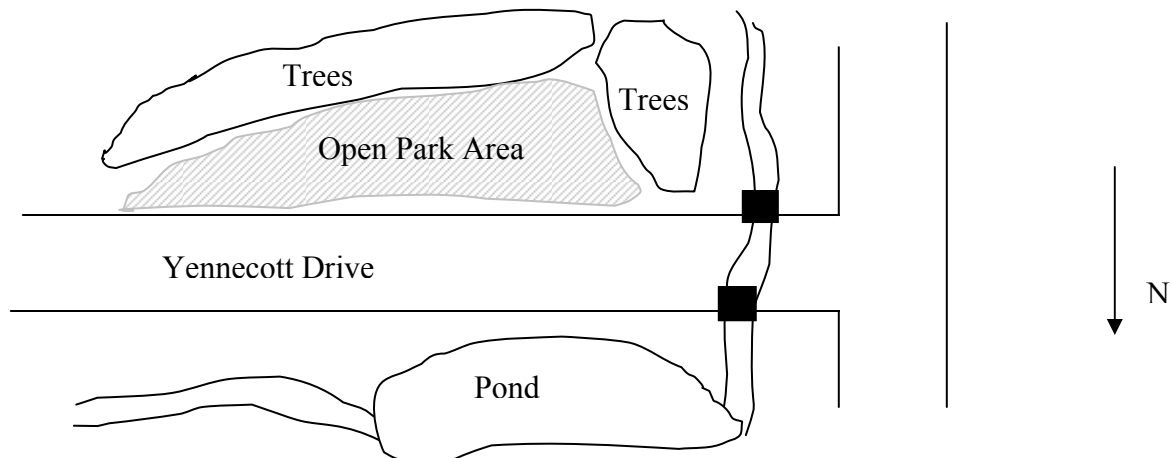PART III. SKETCH

Watershed: Hashamomuck	Subwatershed: H-14	Unique Site ID: H-14	
Date: 09/13/05	Assessed By: T.W. & N.P.	Camera ID: Cannon	Pic#: 11
A. Neighborhood Characterization			
Neighborhood/Subdivision Name: <u>Terrace Cottage Colony</u>		Neighborhood Area (acres) _____	
If unknown, address (or streets) surveyed: <u>Don's Way</u>			
Homeowners Association? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Unknown If yes, name and contact information: _____			
Residential (circle average single family lot size): _____			
<input type="checkbox"/> Single Family Attached (Duplexes, Row Homes) <1/8 1/8 1/4 1/3 1/2 acre <input type="checkbox"/> Multifamily (Apts, Townhomes, Condos) <input checked="" type="checkbox"/> Single Family Detached (<1/4) 1/4 1/2 1 >1 acre <input type="checkbox"/> Mobile Home Park			
Estimated Age of Neighborhood: <u>40</u> years	Percent of Homes with Garages: <u>0</u> % With Basements <u>0</u> %		INDEX*
Sewer Service? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N			●
Index of Infill, Redevelopment, and Remodeling <input checked="" type="checkbox"/> No Evidence <input type="checkbox"/> <5% of units <input type="checkbox"/> 5-10% <input type="checkbox"/> >10%			○
<i>Record percent observed for each of the following indicators, depending on applicability and/or site complexity</i>		Percentage	Comments/Notes
B. Yard and Lawn Conditions			
All the same cottages			
B1. % of lot with impervious cover	30		
B2. % of lot with grass cover	55		●
B3. % of lot with landscaping (e.g., mulched bed areas)	10		◆
B4. % of lot with bare soil	5		●
<i>*Note: B1 through B4 must total 100%</i>			
B5. % of lot with forest canopy	75		◆
B6. Evidence of permanent irrigation or "non-target" irrigation	No		○
B7. Proportion of <i>total neighborhood</i> turf lawns with following management status:	High:		○
	Med:		
	Low: <u>✓</u>		
B8. Outdoor swimming pools? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N <input type="checkbox"/> Can't Tell Estimated # <u>4</u>			○
B9. Junk or trash in yards? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N <input type="checkbox"/> Can't Tell			○
C. Driveways, Sidewalks, and Curbs			
C1. % of driveways that are impervious <input type="checkbox"/> N/A	0		
C2. Driveway Condition <input checked="" type="checkbox"/> Clean <input type="checkbox"/> Stained <input type="checkbox"/> Dirty <input type="checkbox"/> Breaking up <input checked="" type="checkbox"/> Dirt			●
C3. Are sidewalks present? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N If yes, are they on one side of street <input type="checkbox"/> or along both sides <input type="checkbox"/>			
<input type="checkbox"/> Spotless <input type="checkbox"/> Covered with lawn clippings/leaves <input type="checkbox"/> Receiving 'non-target' irrigation			○
What is the distance between the sidewalk and street? _____ ft.			◆
Is pet waste present in this area? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> N/A			○
C4. Is curb and gutter present? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N If yes, check all that apply:			
<input type="checkbox"/> Clean and Dry <input type="checkbox"/> Flowing or standing water <input type="checkbox"/> Long-term car parking <input type="checkbox"/> Sediment			○
<input type="checkbox"/> Organic matter, leaves, lawn clippings <input type="checkbox"/> Trash, litter, or debris <input type="checkbox"/> Overhead tree canopy			◆

* INDEX: ○ denotes potential pollution source; ◆ denotes a neighborhood restoration opportunity

D. Rooftops										
D1. Downspouts are directly connected to storm drains or sanitary sewer					No					◆ ○
D2. Downspouts are directed to impervious surface					No Downspouts					
D3. Downspouts discharge to pervious area										
D4. Downspouts discharge to a cistern, rain barrel, etc.										
*Note: C1 through C4 should total 100%										
D5. Lawn area present downgradient of leader for rain garden? <input type="checkbox"/> Y <input type="checkbox"/> N										◆
E. Common Areas										
E1. Storm drain inlets? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N If yes, are they stenciled? <input type="checkbox"/> Y <input type="checkbox"/> N Condition: <input type="checkbox"/> Clean <input type="checkbox"/> Dirty										◆
Catch basins inspected? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, include Unique Site ID from SSD sheet:										○
E2. Storm water pond? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N Is it a <input type="checkbox"/> wet pond or <input type="checkbox"/> dry pond? Is it overgrown? <input type="checkbox"/> Y <input type="checkbox"/> N What is the estimated pond area? <input type="checkbox"/> <1 acre <input type="checkbox"/> about 1 acre <input type="checkbox"/> > 1 acre										◆
E3. Open Space? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N If yes, is pet waste present? <input type="checkbox"/> Y <input type="checkbox"/> N dumping? <input type="checkbox"/> Y <input type="checkbox"/> N										○
Buffers/floodplain present: <input type="checkbox"/> Y <input type="checkbox"/> N If yes, is encroachment evident? <input type="checkbox"/> Y <input type="checkbox"/> N										
F. Initial Neighborhood Assessment and Recommendations										
Based on field observations, this neighborhood has significant indicators for the following: (check all that apply) <input type="checkbox"/> Nutrients <input type="checkbox"/> Oil and Grease <input type="checkbox"/> Trash/Litter <input type="checkbox"/> Bacteria <input checked="" type="checkbox"/> Sediment <input type="checkbox"/> Other _____										●
Recommended Actions Specific Action <input type="checkbox"/> Onsite retrofit potential? <input type="checkbox"/> Better lawn/landscaping practice? <input type="checkbox"/> Better management of common space? <input type="checkbox"/> Pond retrofit? <input type="checkbox"/> Multi-family Parking Lot Retrofit? <input type="checkbox"/> Other action(s) _____					Describe Recommended Actions:					
Initial Assessment										
NSA Pollution Severity Index <input type="checkbox"/> Severe (More than 10 circles checked) <input type="checkbox"/> High (5 to 10 circles checked) <input checked="" type="checkbox"/> Moderate (Fewer than 5 circles checked) <input type="checkbox"/> None (No circles checked)										
Neighborhood Restoration Opportunity Index <input type="checkbox"/> High (More than 5 diamonds checked) <input checked="" type="checkbox"/> Moderate (3-5 diamonds checked) <input type="checkbox"/> Low (Fewer than 3 diamonds checked)										

NOTES:

Watershed: Hashamomuck	Subwatershed: H-9	Unique Site ID: H-9	
Date: 09/13/05	Assessed By: T.W. & N.P.	Camera ID: Cannon	Pic#: 5-7
A. Neighborhood Characterization			
Neighborhood/Subdivision Name: _____		Neighborhood Area (acres) _____	
If unknown, address (or streets) surveyed: <u>Yennecott Drive</u>			
Homeowners Association? <input type="checkbox"/> Y <input type="checkbox"/> N <input checked="" type="checkbox"/> Unknown If yes, name and contact information: _____			
Residential (circle average single family lot size): _____			
<input type="checkbox"/> Single Family Attached (Duplexes, Row Homes) <1/8 1/8 1/4 1/3 1/2 acre		<input type="checkbox"/> Multifamily (Apts, Townhomes, Condos)	
<input checked="" type="checkbox"/> Single Family Detached <1/4 1/4 1/2 1 >1 acre		<input type="checkbox"/> Mobile Home Park	
Estimated Age of Neighborhood: <u>30+</u> years	Percent of Homes with Garages: <u>100</u> % With Basements <u>100</u> %		INDEX*
Sewer Service? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N			●
Index of Infill, Redevelopment, and Remodeling <input checked="" type="checkbox"/> No Evidence <input type="checkbox"/> <5% of units <input type="checkbox"/> 5-10% <input type="checkbox"/> >10%			○
<i>Record percent observed for each of the following indicators, depending on applicability and/or site complexity</i>		Percentage	Comments/Notes
B. Yard and Lawn Conditions		Picture #	5 6 7
B1. % of lot with impervious cover		12 35 30	
B2. % of lot with grass cover		0 60 30	●
B3. % of lot with landscaping (e.g., mulched bed areas)		10 5 5	◆
B4. % of lot with bare soil		0 0 0	○
<i>*Note: B1 through B4 must total 100%</i>		78 0 8	
B5. % of lot with forest canopy		80 20 30	◇
B6. Evidence of permanent irrigation or "non-target" irrigation		N Y N	●
B7. Proportion of <i>total neighborhood</i> turf lawns with following management status:		High: <u>20</u>	○
		Med: <u>60</u>	
		Low: <u>20</u>	
B8. Outdoor swimming pools? <input checked="" type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell Estimated # <u>11/27</u>			●
B9. Junk or trash in yards? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N <input type="checkbox"/> Can't Tell			○
C. Driveways, Sidewalks, and Curbs			
C1. % of driveways that are impervious <input type="checkbox"/> N/A		100	
C2. Driveway Condition <input checked="" type="checkbox"/> Clean <input type="checkbox"/> Stained <input type="checkbox"/> Dirty <input type="checkbox"/> Breaking up			○
C3. Are sidewalks present? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, are they on one side of street <input type="checkbox"/> or along both sides <input type="checkbox"/>			
<input type="checkbox"/> Spotless <input type="checkbox"/> Covered with lawn clippings/leaves <input type="checkbox"/> Receiving 'non-target' irrigation			○
What is the distance between the sidewalk and street? _____ ft.			◇
Is pet waste present in this area? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> N/A			○
C4. Is curb and gutter present? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N If yes, check all that apply:			
<input type="checkbox"/> Clean and Dry <input type="checkbox"/> Flowing or standing water <input type="checkbox"/> Long-term car parking <input type="checkbox"/> Sediment			○
<input type="checkbox"/> Organic matter, leaves, lawn clippings <input type="checkbox"/> Trash, litter, or debris <input type="checkbox"/> Overhead tree canopy			◇

* INDEX: ○ denotes potential pollution source; ◇ denotes a neighborhood restoration opportunity

D. Rooftops			
D1. Downspouts are directly connected to storm drains or sanitary sewer	No		◇ ○
D2. Downspouts are directed to impervious surface	50%		
D3. Downspouts discharge to pervious area	50%		
D4. Downspouts discharge to a cistern, rain barrel, etc.	No		
<i>*Note: C1 through C4 should total 100%</i>			
D5. Lawn area present downgradient of leader for rain garden? <input checked="" type="checkbox"/> Y <input type="checkbox"/> N			◆
E. Common Areas			
E1. Storm drain inlets? <input checked="" type="checkbox"/> Y <input type="checkbox"/> N If yes, are they stenciled? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N Condition: <input type="checkbox"/> Clean <input checked="" type="checkbox"/> Dirty Catch basins inspected? <input checked="" type="checkbox"/> Y <input type="checkbox"/> N If yes, include Unique Site ID from SSD sheet: <u>H-9</u>			◆ ●
E2. Storm water pond? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N Is it a <input type="checkbox"/> wet pond or <input type="checkbox"/> dry pond? Is it overgrown? <input type="checkbox"/> Y <input type="checkbox"/> N What is the estimated pond area? <input type="checkbox"/> <1 acre <input type="checkbox"/> about 1 acre <input type="checkbox"/> > 1 acre			◇
E3. Open Space? <input checked="" type="checkbox"/> Y <input type="checkbox"/> N If yes, is pet waste present? <input checked="" type="checkbox"/> Y <input type="checkbox"/> N dumping? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N Buffers/floodplain present: <input checked="" type="checkbox"/> Y <input type="checkbox"/> N If yes, is encroachment evident? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N			○
F. Initial Neighborhood Assessment and Recommendations			
Based on field observations, this neighborhood has significant indicators for the following: <i>(check all that apply)</i> <input checked="" type="checkbox"/> Nutrients <input type="checkbox"/> Oil and Grease <input type="checkbox"/> Trash/Litter <input type="checkbox"/> Bacteria <input type="checkbox"/> Sediment <input type="checkbox"/> Other _____			●
Recommended Actions <i>Specific Action</i> <input checked="" type="checkbox"/> Onsite retrofit potential? <input checked="" type="checkbox"/> Better lawn/landscaping practice? <input type="checkbox"/> Better management of common space? <input type="checkbox"/> Pond retrofit? <input type="checkbox"/> Multi-family Parking Lot Retrofit? <input type="checkbox"/> Other action(s) _____		Describe Recommended Actions: Lawn care education, street sweeping, catchbasin cleanout, swale retrofits	
Initial Assessment			
NSA Pollution Severity Index <input type="checkbox"/> Severe (More than 10 circles checked) <input checked="" type="checkbox"/> High (5 to 10 circles checked) <input type="checkbox"/> Moderate (Fewer than 5 circles checked) <input type="checkbox"/> None (No circles checked)			
Neighborhood Restoration Opportunity Index <input type="checkbox"/> High (More than 5 diamonds checked) <input checked="" type="checkbox"/> Moderate (3-5 diamonds checked) <input type="checkbox"/> Low (Fewer than 3 diamonds checked)			

NOTES:

Watershed: Hashamomuck	Subwatershed: H-4	Unique Site ID: H-4	
Date: 09/13/05	Assessed By: T.W. & N.P.	Camera ID: Cannon	Pic#:
A. Neighborhood Characterization			
Neighborhood/Subdivision Name: _____		Neighborhood Area (acres) _____	
If unknown, address (or streets) surveyed: <u>Long Creek Drive & Park Avenue</u>			
Homeowners Association? <input type="checkbox"/> Y <input type="checkbox"/> N <input checked="" type="checkbox"/> Unknown If yes, name and contact information: _____			
Residential (circle average single family lot size): _____			
<input type="checkbox"/> Single Family Attached (Duplexes, Row Homes) <1/8 1/8 1/4 1/3 1/2 acre		<input type="checkbox"/> Multifamily (Apts, Townhomes, Condos)	
<input checked="" type="checkbox"/> Single Family Detached <1/4 1/4 1/2 1 >1 acre		<input type="checkbox"/> Mobile Home Park	
Estimated Age of Neighborhood: <u>4</u> years	Percent of Homes with Garages: <u>100</u> % With Basements <u>100</u> %		INDEX*
Sewer Service? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N			●
Index of Infill, Redevelopment, and Remodeling <input checked="" type="checkbox"/> No Evidence <input type="checkbox"/> <5% of units <input type="checkbox"/> 5-10% <input type="checkbox"/> >10%			○
<i>Record percent observed for each of the following indicators, depending on applicability and/or site complexity</i>		Percentage	Comments/Notes
B. Yard and Lawn Conditions		Picture #	
	1	2	3
B1. % of lot with impervious cover	30	20	40
B2. % of lot with grass cover	25	78	20
B3. % of lot with landscaping (e.g., mulched bed areas)	5	2	4
B4. % of lot with bare soil	0	0	0
<i>*Note: B1 through B4 must total 100%</i>	100	100	100
B5. % of lot with forest canopy	0	0	20
B6. Evidence of permanent irrigation or "non-target" irrigation	Y	Y	Y
B7. Proportion of <i>total neighborhood</i> turf lawns with following management status:	High: <u>100</u>		●
	Med:		
	Low:		
B8. Outdoor swimming pools? <input checked="" type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> Can't Tell Estimated # <u>4</u>			●
B9. Junk or trash in yards? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N <input type="checkbox"/> Can't Tell			○
C. Driveways, Sidewalks, and Curbs			
C1. % of driveways that are impervious <input type="checkbox"/> N/A	100		
C2. Driveway Condition <input checked="" type="checkbox"/> Clean <input type="checkbox"/> Stained <input type="checkbox"/> Dirty <input type="checkbox"/> Breaking up			○
C3. Are sidewalks present? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N If yes, are they on one side of street <input type="checkbox"/> or along both sides <input type="checkbox"/>			
<input type="checkbox"/> Spotless <input type="checkbox"/> Covered with lawn clippings/leaves <input type="checkbox"/> Receiving 'non-target' irrigation			○
What is the distance between the sidewalk and street? _____ ft.			◇
Is pet waste present in this area? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> N/A			○
C4. Is curb and gutter present? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N If yes, check all that apply:			
<input type="checkbox"/> Clean and Dry <input type="checkbox"/> Flowing or standing water <input type="checkbox"/> Long-term car parking <input type="checkbox"/> Sediment			○
<input type="checkbox"/> Organic matter, leaves, lawn clippings <input type="checkbox"/> Trash, litter, or debris <input type="checkbox"/> Overhead tree canopy			◇

* INDEX: ○ denotes potential pollution source; ◇ denotes a neighborhood restoration opportunity

NOTES:

Watershed: Hashamomuck	Subwatershed: H-9	Unique Site ID: H-9				
Date: 09/ 13/ 05	Assessed By: T.W. & N.P.	Camera ID: Cannon				
Map Grid	Rain in Last 24 Hours <input type="checkbox"/> Y <input checked="" type="checkbox"/> N	Pic # 8				
A. Location						
A1. Street names or neighborhood surveyed: Drive Yennecoh Drive						
A2. Adjacent land use: <input checked="" type="checkbox"/> Residential <input type="checkbox"/> Commercial <input type="checkbox"/> Industrial <input type="checkbox"/> Institutional <input type="checkbox"/> Municipal <input type="checkbox"/> Transport-Related						
A3. Corresponding HSI or NSA field sheet? If so, circle HSI or NSA and record its Unique Site ID here <u>H-9</u>						
B. Street Conditions						
B1. Road Type: <input type="checkbox"/> Arterial <input type="checkbox"/> Collector <input checked="" type="checkbox"/> Local <input type="checkbox"/> Alley <input type="checkbox"/> Other: _____						
B2. Condition of Pavement: <input type="checkbox"/> New <input checked="" type="checkbox"/> Good <input type="checkbox"/> Cracked <input type="checkbox"/> Broken						
B3. Is on-street parking permitted <input checked="" type="checkbox"/> Y <input type="checkbox"/> N If yes, approximate number of cars per block: <u>0</u>						
B4. Are large cul-de-sacs present? <input type="checkbox"/> Y <input checked="" type="checkbox"/> N						
B5. Is trash present in curb and gutter? If so, use the index to the right to record amount.	Index Rating for Accumulation in Gutters					
	Clean			Filthy		
	Sediment	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5
	Organic Material	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5
Litter	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	
C. Storm Drain Inlets and Catch Basins						
C1. Type of storm drain conveyance: <input checked="" type="checkbox"/> open <input type="checkbox"/> enclosed <input type="checkbox"/> mixed						
C2. Percentage of inlets with catch basin storage: <u>0</u> <input type="checkbox"/> N/A						
Sample 1-2 catch basins per NSA/HSI	C3. Catch basin #1		C4. Catch basin #2			
Latitude	° ' "		° ' "			
Longitude	° ' "		° ' "			
LMK #						
Picture #						
Current Condition	<input type="checkbox"/> Wet <input checked="" type="checkbox"/> Dry		<input type="checkbox"/> Wet <input type="checkbox"/> Dry			
Condition of Inlet	<input type="checkbox"/> Clear <input checked="" type="checkbox"/> Obstructed		<input type="checkbox"/> Clear <input type="checkbox"/> Obstructed			
Litter Accumulation	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Organics Accumulation	<input checked="" type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Sediment Accumulation	<input checked="" type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Sediment Depth (in feet)	_____ ft.		_____ ft.			
Water Depth	_____ ft.		_____ ft.			
Evidence of oil and grease	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Sulfur smell	<input type="checkbox"/> Y <input checked="" type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
Accessible to vacuum truck	<input checked="" type="checkbox"/> Y <input type="checkbox"/> N		<input type="checkbox"/> Y <input type="checkbox"/> N			
D. Non-Residential Parking Lot (>2 acres)						
D1. Approximate size: _____ acres						
D2. Lot Utilization: <input type="checkbox"/> Full <input type="checkbox"/> About half full <input type="checkbox"/> Empty						
D3. Overall condition of Pavement: <input type="checkbox"/> Smooth (no cracks) <input type="checkbox"/> Medium (few cracks) <input type="checkbox"/> Rough (many cracks) <input type="checkbox"/> Very Rough (numerous cracks and depressions)						
D4. Is lot served by a storm water treatment practice? <input type="checkbox"/> Y <input type="checkbox"/> N If yes, describe: _____						
D5. On-site retrofit potential: <input type="checkbox"/> Excellent <input type="checkbox"/> Good <input type="checkbox"/> Poor						

E. Municipal Pollutant Reduction Strategies

E1. Degree of pollutant accumulation in the system: ☐ High ☐ Medium ☐ Low ☐ None

E2. Rate the feasibility of the following pollution prevention strategies:

Street Sweeping: ☒ High ☐ Moderate ☐ Low

Storm Drain Stenciling: ☒ High ☐ Moderate ☐ Low

Catch Basin Clean-outs: ☒ High ☐ Moderate ☐ Low

Parking Lot Retrofit Potential: ☐ High ☐ Moderate ☐ Low

Catch Basin Sketches

#1

#2

Notes:

Hashamomuck Pond



NSA H-4 (1)



NSA H-9 (1)



NSA H-4 (2)



NSA H-9 (2)



NSA H-4 (3)



NSA H-9 (3)

Hashamomuck Pond



NSA H-14



PAA H-9



SSD H-9